

Philips LuxSpace Accent Compact


Installation instructions

Instructions de montage
Montageanleitung
Montage instructie
Istruzioni di montaggio




Instrucciones de montaje
Instruções de montagem
Monteringsinstruktioner
Monteringsvejledning

Kokoonpano- ja kiinnitysohjeet
Montaj yönergesi
Odghiez synarmologhshz
Instrukcja montazu

Szerelési utasítások
Návod k montázi
bycnerwbz gj vjynf:e
Návod k montázi

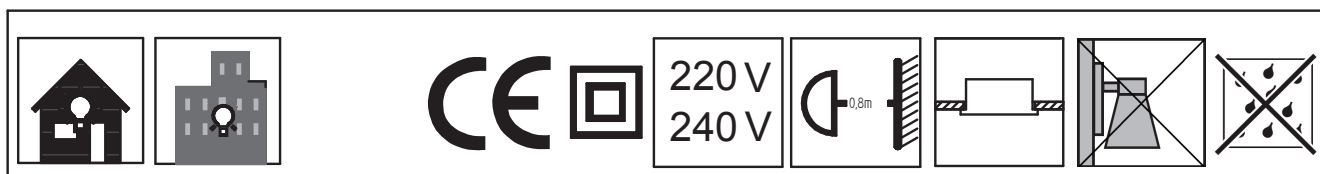

	IP20	IP44	650°	min	max	kg	P _{nom}	P _{max}	Beam angle MB	WB
RS740B LED17S/CH PSU-E	•	•	•	0°C	35°C	1,1 kg	31 W	36W	•	•
RS740B LED17S/CH PSED-E	•	•	•	0°C	35°C	1,1 kg	30 W	34W	•	•
RS741B LED17S/CH PSU-E	•	•	•	0°C	35°C	1,4 kg	31 W	36W	•	•
RS741B LED17S/CH PSED-E	•	•	•	0°C	35°C	1,4 kg	30 W	34W	•	•
RS740B LED19S/FMT PSU-E	•	•	•	0°C	35°C	1,1 kg	34 W	40W	•	•
RS741B LED19S/FMT PSU-E	•	•	•	0°C	35°C	1,4 kg	32 W	40W	•	•

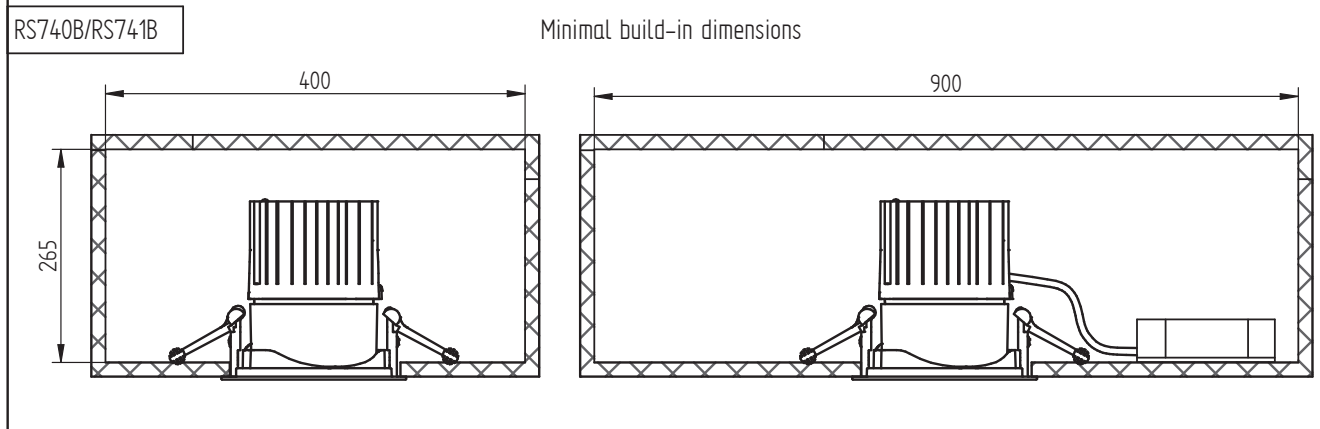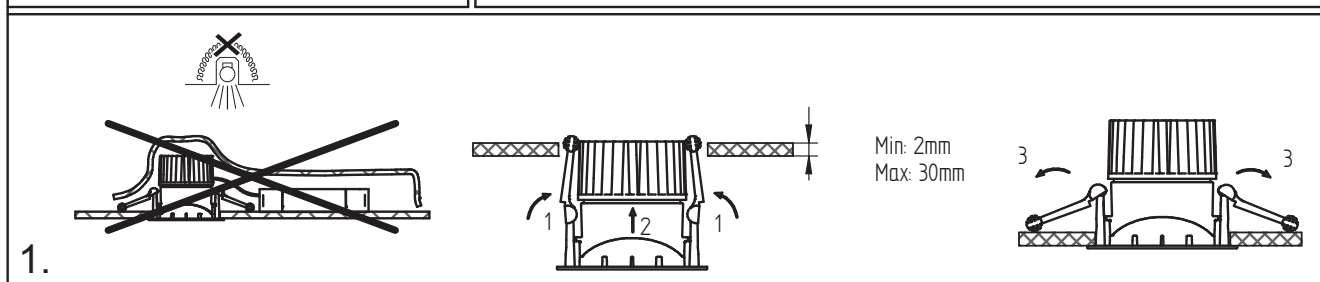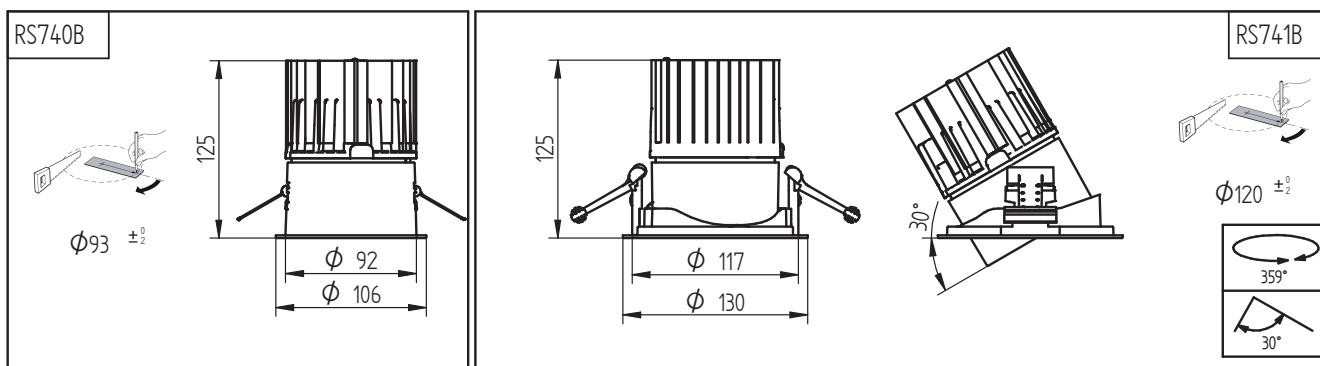

4443 160 07721

Version date : 03/11/14



Data Subject to change without notice

Printed in EU


www.philips.com/lighting

PHILIPS

Wirings for PSU-E and PSED-E drivers

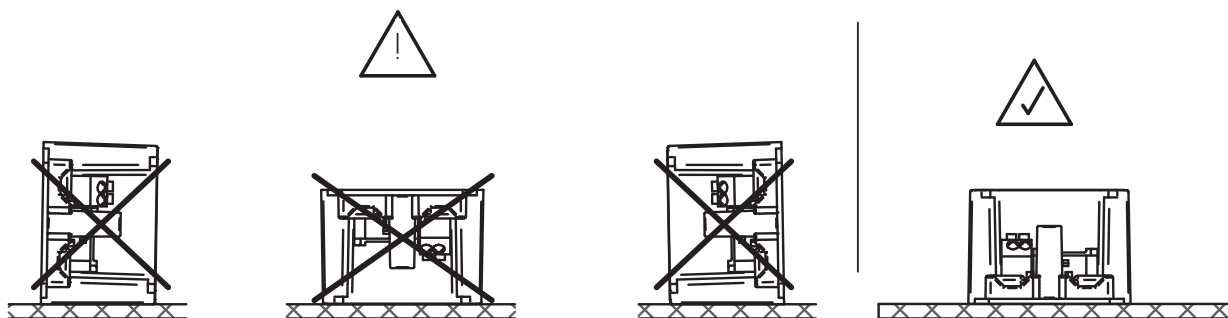
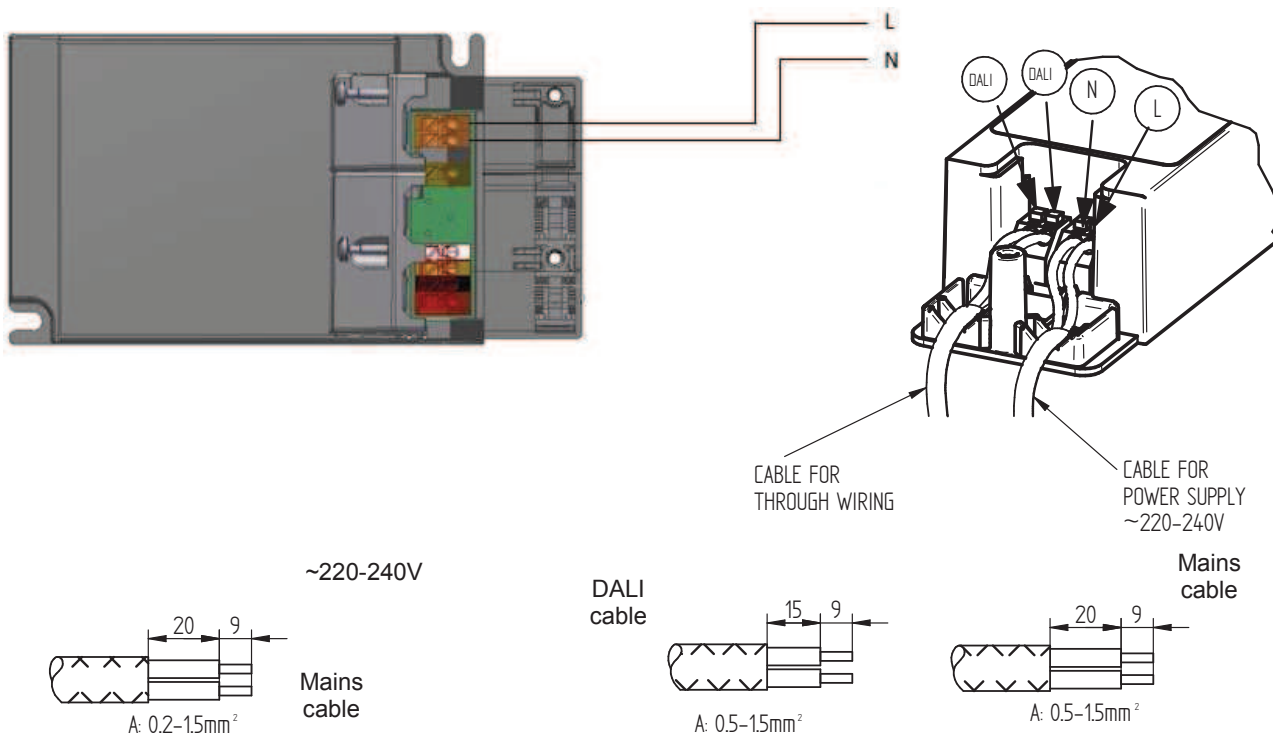


*According to: IEC60555 test conditions

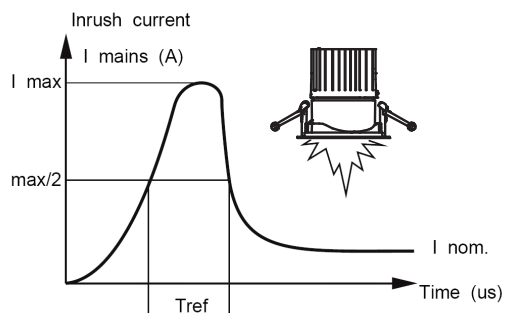


LED17S, LED19S PSU-E LED driver 36W 0.3-1A 48V I 230V		LED17S PSED-E Xitanium 36W 0.3-1A 48V TD/I 230V	
Inom(A)	LED17S: 0.136 LED19S: 0.152	Inom(A)	0.133
I _{max} (A)	6	I _{max} (A)	5.3
T _{ref} (ms)	0.055	T _{ref} (ms)	0.7
MCB	Max Products*	MCB	Max Products*
B-10A	25	B-10A	15
B-16A	40	B-16A	24
C-10A	41	C-10A	24
C-16A	67	C-16A	40


Reflector and fixed housing accessory changing instructions

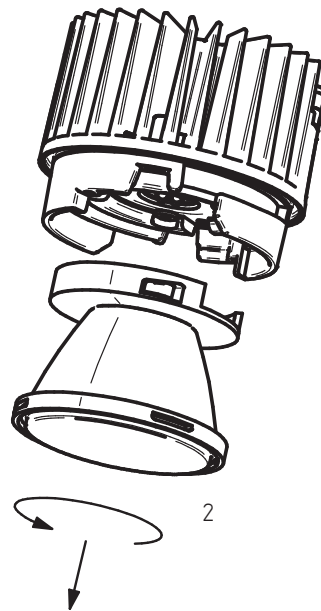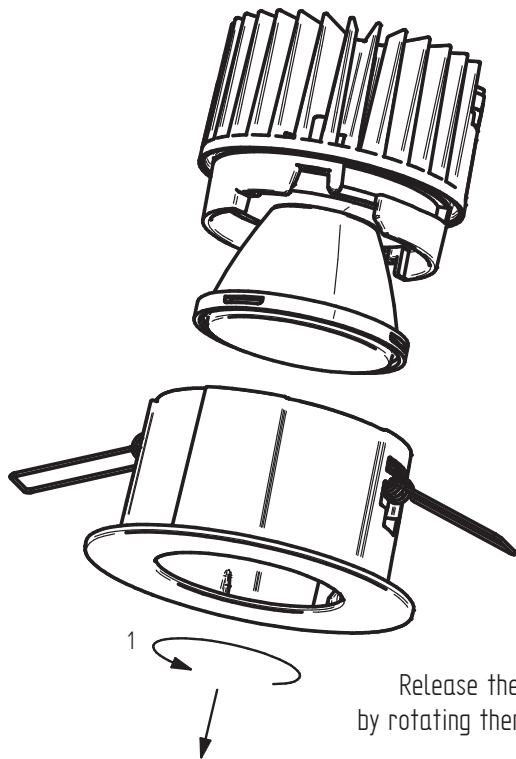

Release the required parts
by rotating them counter clockwise

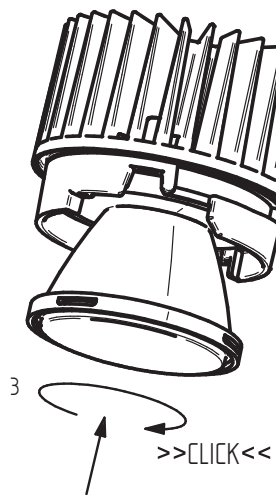

Insert the new reflector
and turn clockwise

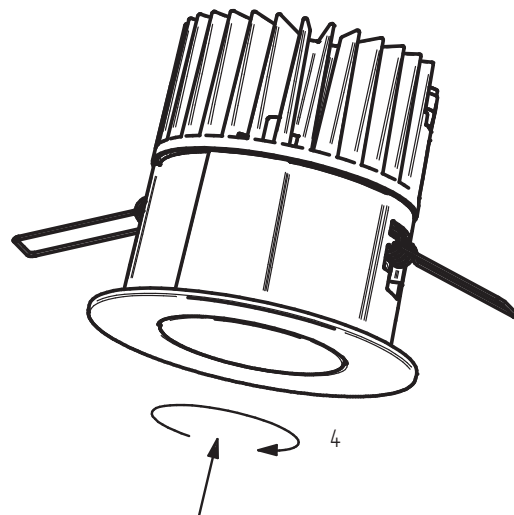

Replace the new housing
and turn clockwise



Only with soft clothes!