

EnduraBay LX 高天棚灯具

HPK138

Mounting instruction / 安装说明书

HPK138-M001d



Type Description 型号描述	Vol./Fre. 电压/频率			Protective Shield 保护屏
HPK138/HPL-N250W HPK138/HPL-N400W HPK138/HPI-P250W HPK138/HPI-P400W HPK138/SON150W HPK138/SON250W HPK138/SON400W HPK138/CDM-EP250W	220V/50Hz	HPL-N 250W HPL-N 400W HPI-Plus 250W BU HPI-Plus 400W BUS SON150W SON250W SON400W CDM-EP 250W	5.47 Kg 6.57 Kg 7.15 Kg 8.25 Kg 5.65 Kg 6.67 Kg 8.45 Kg 6.67 Kg	NA / 不适用 NA / 不适用 Yes / 带保护屏 Yes / 带保护屏 NA / 不适用 NA / 不适用 NA / 不适用 NA / 不适用
HPK138 1xHPL-N250W IC 240V-50Hz HPK138 1xHPL-N400W IC 240V-50Hz HPK138 1xHPI-P250W-BU IC 240V-50Hz HPK138 1xHPI-P400W-BUS IC 240V-50Hz HPK138 1xSON150W IC 240V-50Hz HPK138 1xSON250W IC 240V-50Hz HPK138 1xSON400W IC 240V-50Hz HPK138 1xCDM-EP250W IC 240V-50Hz	240V/50Hz	HPL-N 250W HPL-N 400W HPI-P 250W BU HPI-P 400W BUS SON150W SON250W SON400W CDM-EP 250W	5.47 Kg 6.57 Kg 7.15 Kg 8.25 Kg 5.65 Kg 6.67 Kg 8.45 Kg 6.67 Kg	NA / 不适用 NA / 不适用 Yes / 带保护屏 Yes / 带保护屏 NA / 不适用 NA / 不适用 NA / 不适用 NA / 不适用


Accessories/附件:

1. GPK138 R-WB D425
2. ZPK138 PG D425 IP20


Required to check capacitance once a year, need to replace the capacitor if the capacitance less than 20% as rated.







要求一年检查一次电容值，如果发现低于标称的20%需要更换电容器。

Dimensions尺寸 (Unit:mm)

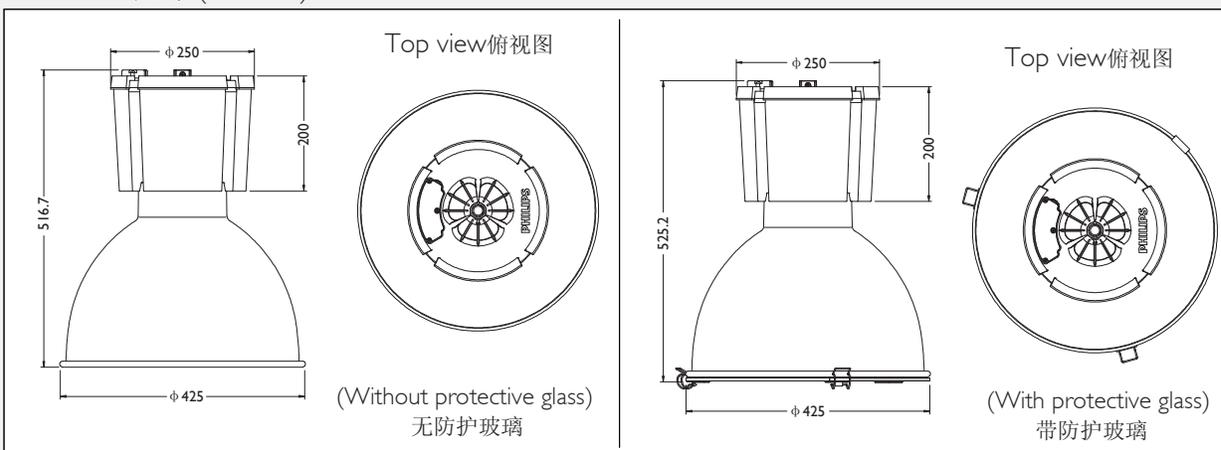

Installation安装应用

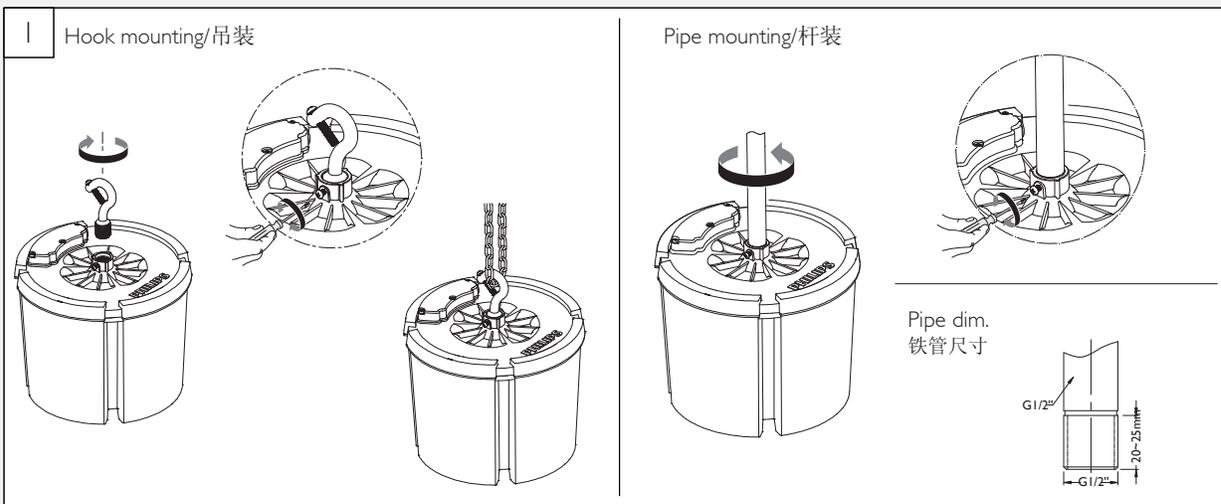

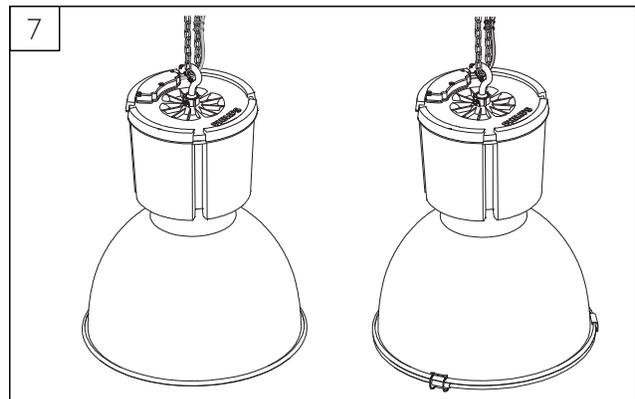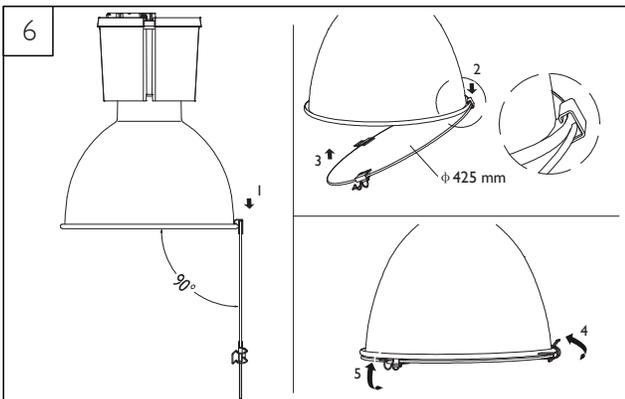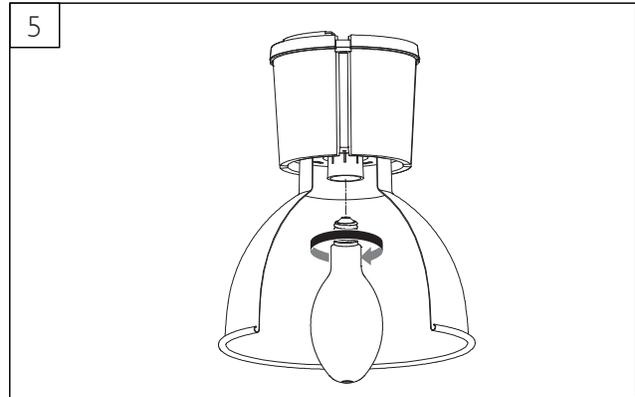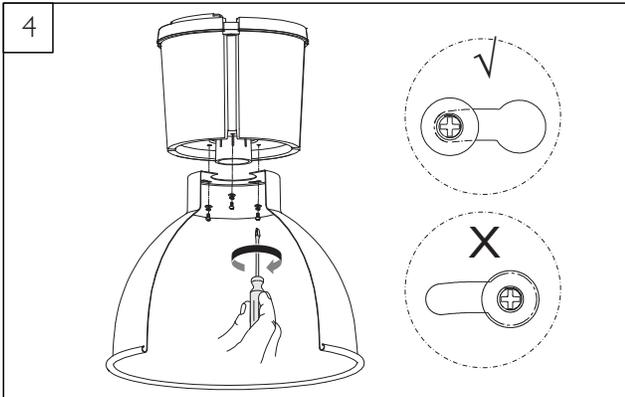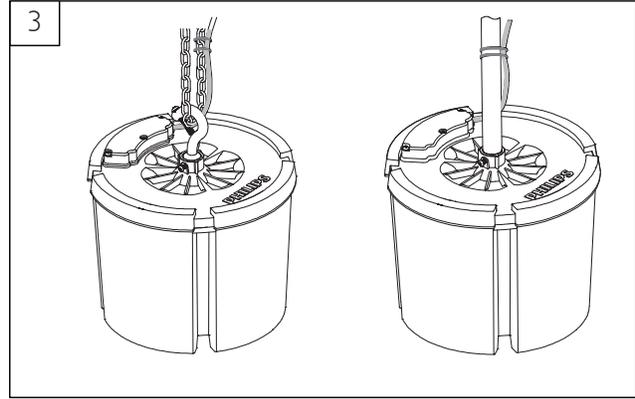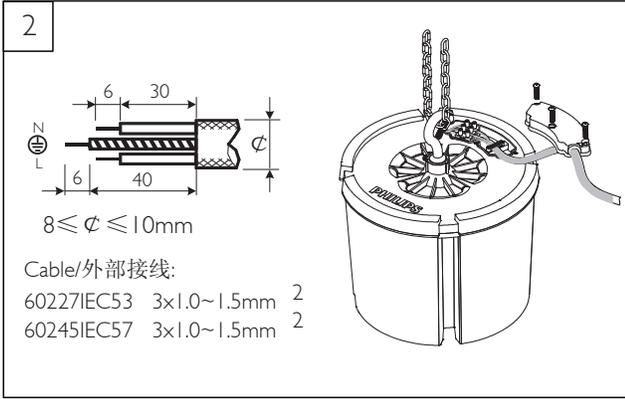

Maintenance 维护保养

- 1、In order to ensure optimum performance, please clean the luminaire regularly (recommended twice a year). While cleaning the luminaire, please use a soft cotton pad only.
为了保持灯具明亮效果，请定期（半年一次）进行清洁。灯具清洁时请使用软布擦拭。
- 2、Please turn off the power and take down the protective glass before maintenance and lamp replacement.
须断开电源后，才能维修和更换光源。更换光源时须将玻璃组件完全取下。
- 3、The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.
灯具应由有资格的电工安装，接线要符合IEE电气标准或国家标准。
- 4、A luminaire equipped with a HPI-Plus lamp shall only be used complete with its protective shield. And please replace any cracked safety screen.
使用HPI-Plus光源的灯具必须配备钢化玻璃保护屏。保护屏碎裂时请立即更换。
- 5、This luminaire is only suitable for indoor usage. And not suitable for the corrosive environment and area prone to hurricane and extreme winds.
本灯具仅限于室内使用。且不适合安装在会产生酸碱碱性腐蚀的环境及海边、港口等强台风多发地区。
- 6、The luminaire suit for IEC60598.2.1, IEC60598.1, EN55015, EN61547
灯具符合国标GB7000.201, GB7000.1, GB17743, GB17625
- 7、The gear box must be used with corresponding reflector/glass sets. Philips will not be responsible for all consequences if misused.
本产品之电器箱必须与对应的反射器/玻璃组件配套使用，飞利浦不承担因搭配使用不当而产生的一切后果及责任。

