


PHILIPS ADVANCE

High Pressure Sodium Lamp Ballast

Catalog Number 79W8241
For 250W S50
60 Hz CWA
Status: Special

DIMENSIONS AND DATA

79W
OUTDOOR
WEATHERPROOF
DIMENSIONS

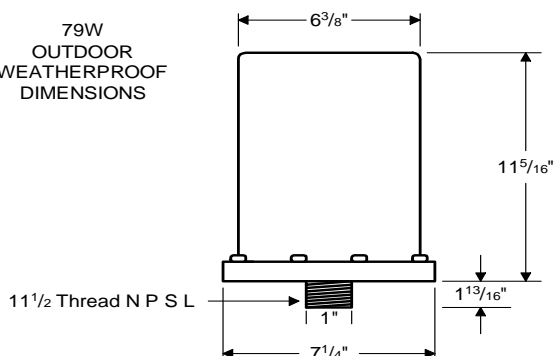

INPUT VOLTS	480				
CIRCUIT TYPE	CWA				
POWER FACTOR (min)	90%				
REGULATION					
Line Volts	±10%				
Lamp Watts	WITHIN TRAPEZOID				
LINE CURRENT (Amps)					
Operating.....	0.63				
Open Circuit.....	0.45				
Starting.....	0.40				
UL TEMPERATURE RATINGS					
Insulation Class	H(180°C)				
Coil Temperature Code	1029				
MIN. AMBIENT STARTING TEMP.	-40°F or -40°C				
NOM. OPEN CIRCUIT VOLTAGE	187				
INPUT VOLTAGE AT LAMP DROPOUT.....	360				
INPUT WATTS	310				
RECOMMENDED FUSE (Amps).....	2				
CORE and COIL					
Dimension (A)					
Dimension (B)					
Weight (lbs.)	24				
Lead Lengths	10"				
CAPACITOR REQUIREMENT					
Microfarads					
Volts (min.)					
Fault Current Withstand (amps)					
60 Hz TEST PROCEDURES (Refer to Advance Test Procedure for HID Ballasts - Form 1270)					
High Potential Test (Volts)					
1 minute	2000				
2 seconds	2500				
Open Circuit Voltage Test (Volts)	170-205				
Short-Circuit Current Test (Amps)					
Secondary Current	3.70-4.50				
Input Current.....	0.25-0.45	-	-	-	-

Capacitor:

The capacitor is included as part of the potted assembly.



Wiring Diagram:

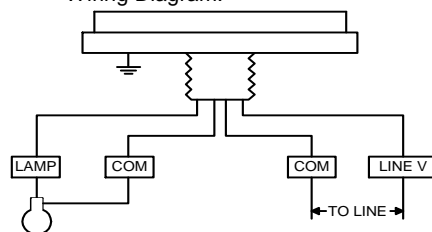


Fig. OW-1

Ordering Information

Order Suffix

Description

Ignitor:

IN CAN

The ignitor is included as part of the potted assembly.

Data is based upon tests performed by Philips Lighting Electronic N.A. in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

Philips Lighting Electronic N.A.

10275 West Higgins Road · Rosemont, IL 60018 · Tel:800-322-2086 Fax:888-432-1882
Customer Support/ Technical Service:800-372-3331 · OEM Support: 866-915-5886

02/23/12