


PHILIPS

LuxSpace Accent Mini, Compact



RS730B, RS731B
RS740B, RS741B

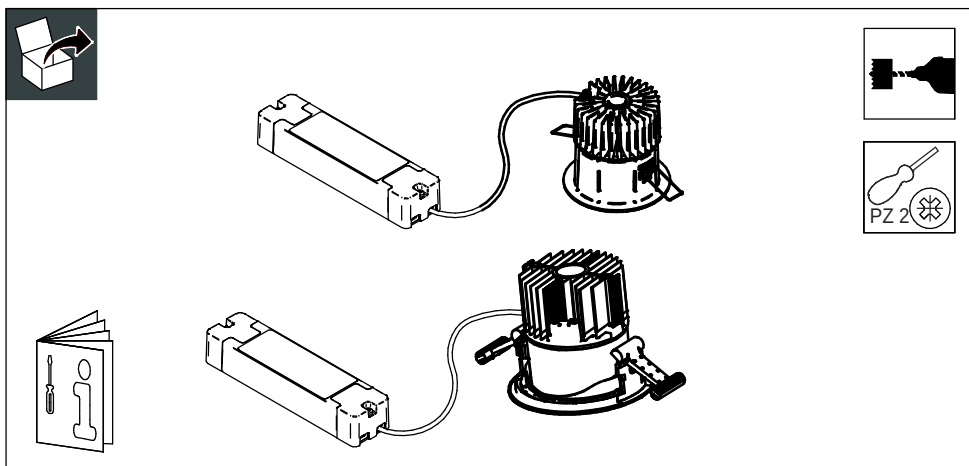


		Color tempera- ture (K)	P (W)					Beam angle		
								NB	MB	WB
RS730B Mini, Fixed	LED11S	827	17	0,54	82	x		x		
		830, 840	15	0,54	82	x		x		
		930	18	0,54	82	x		x		
	LED12S	827, 830, 840	11,3	0,54	82	x			x	x
		930	12,8	0,54	82	x			x	x
RS731B Mini, Adjustable	LED11S	827	17	0,56	100		x	x		
		830, 840	15	0,56	100		x	x		
		930	18	0,56	100		x	x		
	LED12S	827, 830, 840	11,3	0,56	100		x		x	x
		930	12,8	0,56	100		x		x	x
RS740B Compact, Fixed	LED17S	827, 830, 840	14,8	0,76	93	x			x	x
		930	17,6	0,76	93	x			x	x
	LED27S	827, 830, 840	25	0,76	93	x			x	x
		930	30,5	0,76	93	x			x	x
	LED39S	827, 830, 840	35,5	0,76	93	x			x	x
		930	44,5	0,76	93	x			x	x
	LED49S	827, 830, 840	50	0,74	93	x			x	x
		930	55	0,74	93	x			x	x
	LED20S	827, 830, 840	26,5	0,76	93	x		x		
		930	27	0,76	93	x		x		
RS741B Compact, Adjustable	LED17S	827, 830, 840	14,8	0,76	120		x		x	x
		930	17,6	0,76	120		x		x	x
	LED27S	827, 830, 840	25	0,76	120		x		x	x
		930	30,5	0,76	120		x		x	x
	LED39S	827, 830, 840	35,5	0,76	120		x		x	x
		930	44,5	0,76	120		x		x	x
	LED49S	827, 830, 840	50	0,74	120		x		x	x
		930	55	0,74	120		x		x	x
	LED20S	827, 830, 840	26,5	0,76	120		x	x		
		930	27	0,76	120		x	x		

RS730B


RS731B

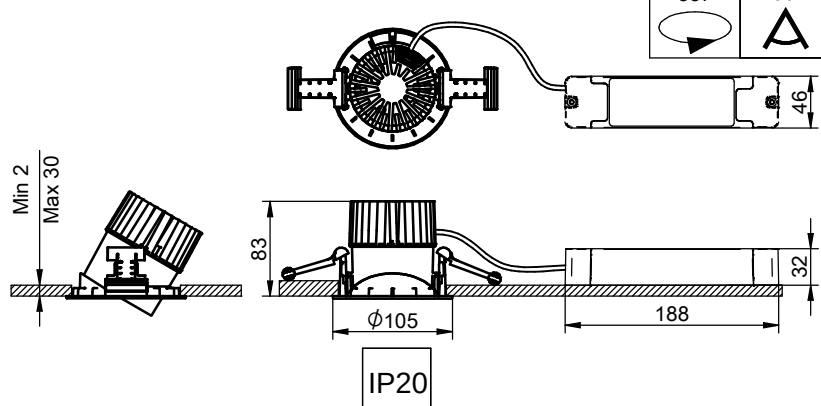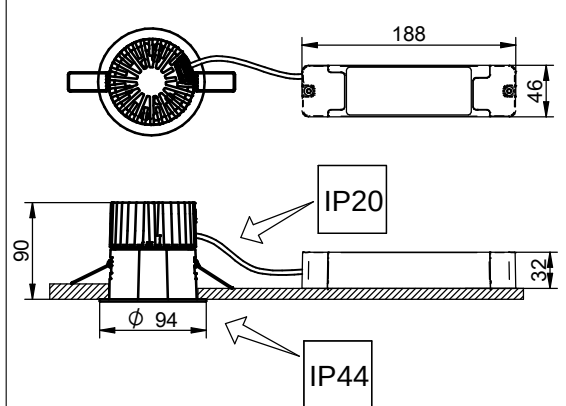

RS740B


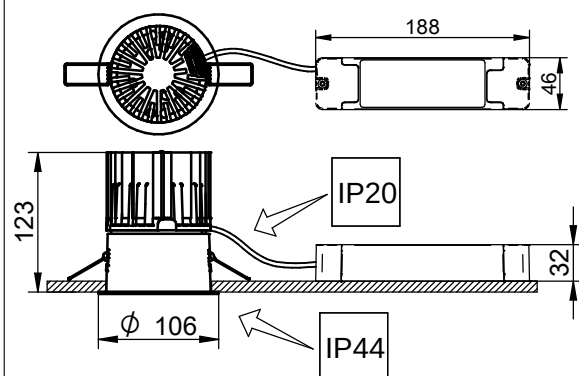


RS741B

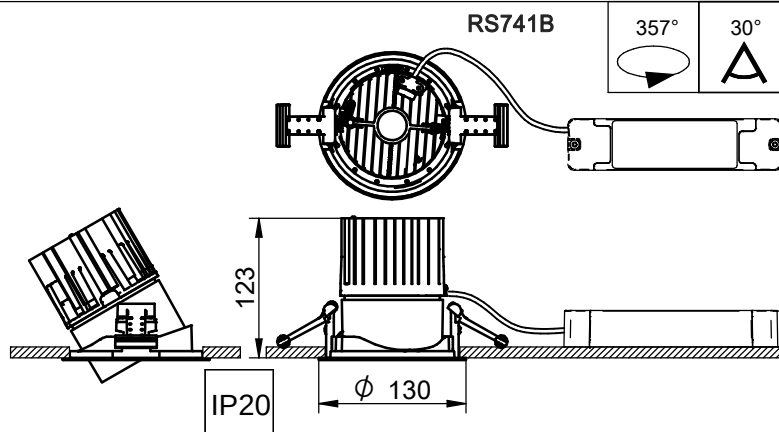


Minimal built-in dimensions

TYPE	L (mm)	W (mm)	H (mm)
RS730B, RS731B	700	350	150
RS740B, RS741B	900	400	265

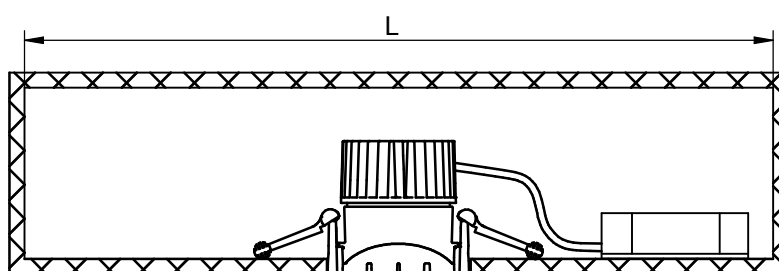
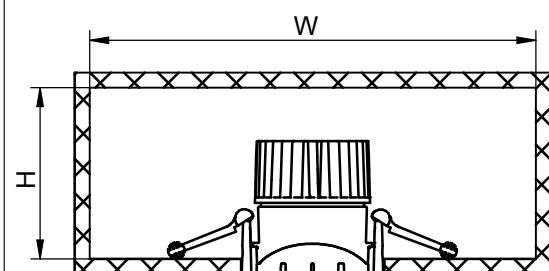


1a



ϕ see table on 1st page $^{+2}_{-0}$

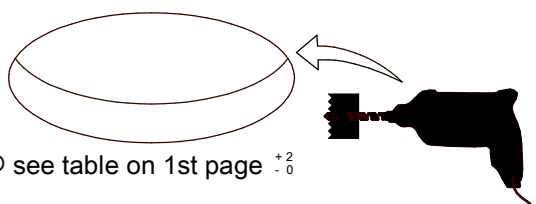


1b




2a

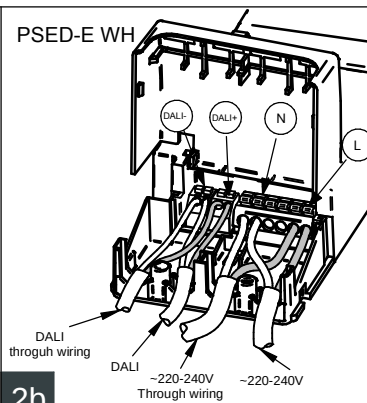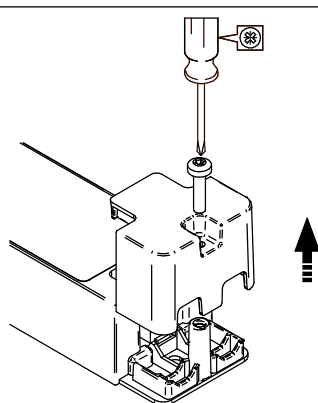

2b

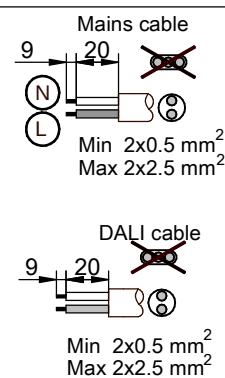


PSED-E LH

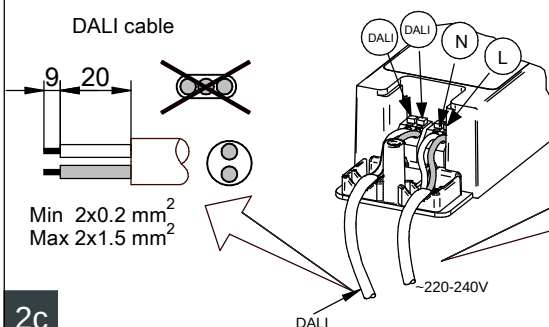


2c

Mains cable




PSE-E LH




2d




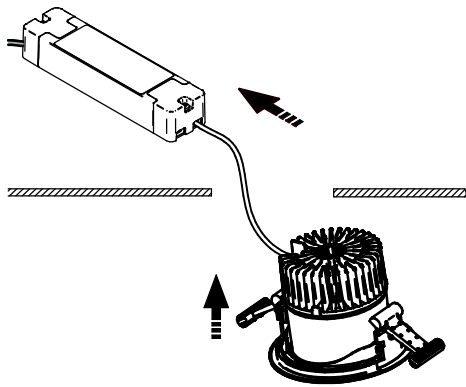





3a

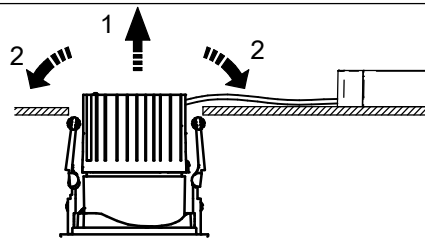

3b

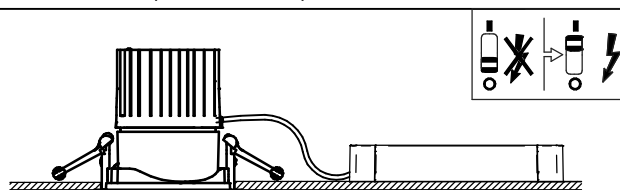


3c

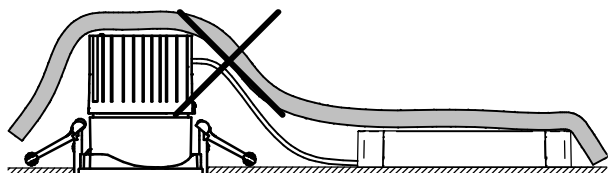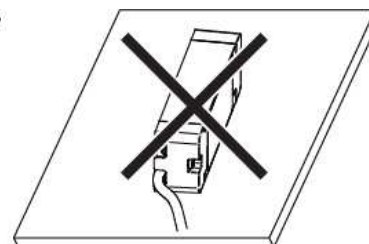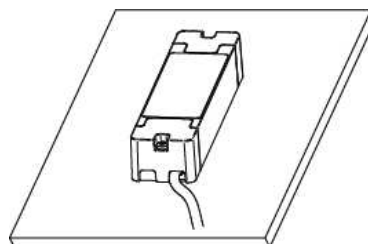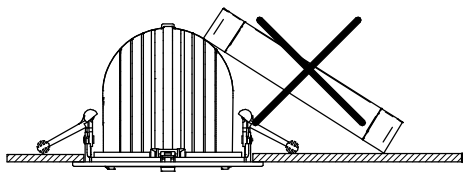



Luminaire must not cover with any thermally insulating material.

Xtanium 36W LH 0.3-1A 48V I 230V (PSE-E)			Xtanium 36W WH 0.3-1A 54V TD/I 230V (PSED-E)			Xtanium 50W LH 0.7-1.5A 48V 230V (PSE-E)			Xtanium 50W LH 0.7-1.5A 48V TD/I 230V (PSED-E)			LED driver 36W 0.3-1A 48V I 230V (PSU-E)		
Lum. Pack	CCT	Inom. (A)	Lum. Pack	CCT	Inom. (A)	Lum. Pack	CCT	Inom. (A)	Lum. Pack	CCT	Inom. (A)	Lum. Pack	CCT	Inom. (A)
LED27S	827/830/840	0,107	LED27S	827/830/840	0,107	LED39S	930	0,196	LED39S	930	0,196	LED17S	827/830/840	0,067
	930	0,133		930	0,133		930	0,196		930	0,196		930	0,079
LED20S	827/830/840	0,102	LED20S	827/830/840	0,102	LED40S	827/830	0,228	LED40S	827/830	0,228	LED20S	827/830/840	0,102
	930	0,11		930	0,11		840/930	0,228		840/930	0,228		930	0,11
LED39S	827/830/840	0,154	LED39S	827/830/840	0,154	LED49S	827/830/840	0,2	LED49S	827/830/840	0,2	LED27S	827/830/840	0,107
	930	0,154		930	0,154		930	0,24		930	0,24		930	0,133
I _{max} (A)	14,5		I _{max} (A)	5,3		I _{max} (A)	23,5		I _{max} (A)	5,3		I _{max} (A)	5,3	
T _{ref} (ms)	0,22		T _{ref} (ms)	0,7		T _{ref} (ms)	0,272		T _{ref} (ms)	0,7		T _{ref} (ms)	0,7	
MCB	Max. Products (pcs)*		MCB	Max. Products (pcs)*		MCB	Max. Products (pcs)*		MCB	Max. Products (pcs)*		MCB	Max. Products (pcs)*	
B-10A	20		B-10A	15		B-10A	15		B-10A	18		B-10A	18	
B-16A	32		B-16A	24		B-16A	24		B-16A	30		B-16A	30	
C-10A	33		C-10A	24		C-10A	24		C-10A	31		C-10A	31	
C-16A	54		C-16A	40		C-16A	40		C-16A	51		C-16A	51	

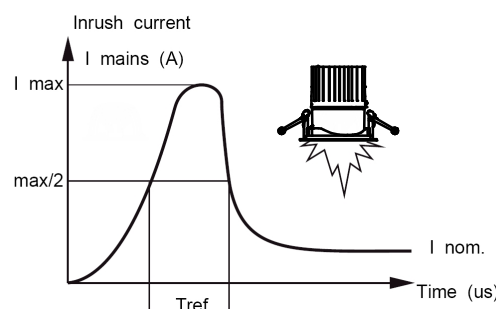


Xtanium 20W 0.15-0.5A 48V Is 230V (PSE-E)			Xtanium 20W LH 0.15-0.5A 48V TD/Is 230V (PSED-E)			Xtanium 25W LH 0.3-1A 36V TD Is 230V (PSED-E)		
Lum. Pack	CCT	Inom. (A)	Lum. Pack	CCT	Inom. (A)	Lum. Pack	CCT	Inom. (A)
LED11S	827	0,073	LED12S	827/830/840	0,052	LED11S	827	0,073
	830/840	0,065		930	0,059		830/840	0,065
	930	0,078		827/830/840	0,067		930	0,078
LED12S	827/830/840	0,052	LED17S	827/830/840	0,067			
	930	0,059		930	0,079			
LED17S	827/830/840	0,067						
	930	0,079						
I _{max} (A)	14,5		I _{max} (A)	5,3		I _{max} (A)	6	
T _{ref} (ms)	0,22		T _{ref} (ms)	0,7		T _{ref} (ms)	0,055	
MCB	Max. Products (pcs)*		MCB	Max. Products (pcs)*		MCB	Max. Products (pcs)*	
B-10A	18		B-10A	15		B-10A	25	
B-16A	30		B-16A	24		B-16A	40	
C-10A	31		C-10A	24		C-10A	41	
C-16A	51		C-16A	40		C-16A	68	

Reflector and fixed housing accessory changing instructions

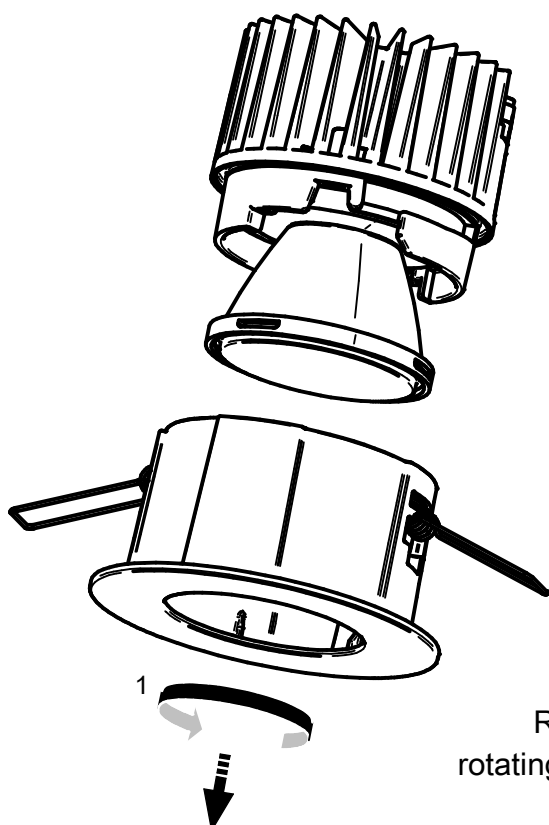


4a

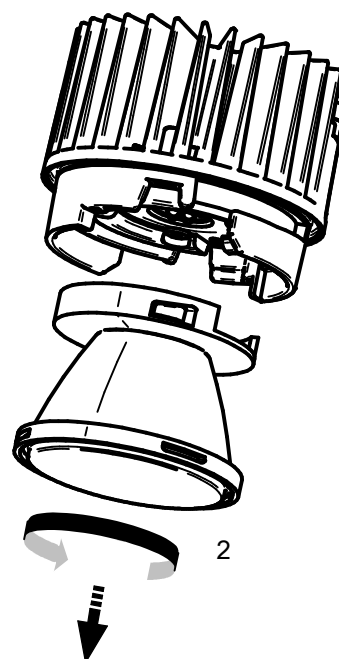


4b

Release the parts by
rotating them counter clockwise

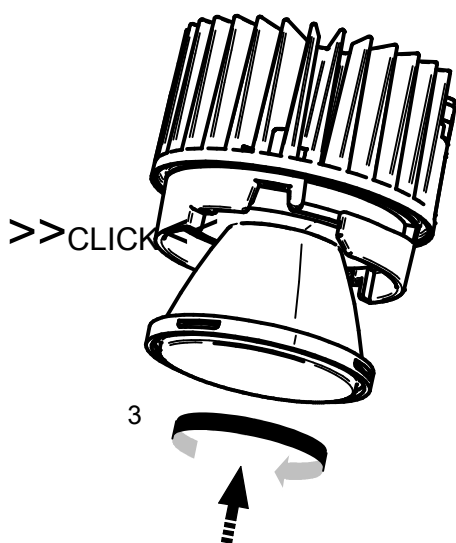


4a

Insert the new reflector
and turn clockwise



Only with soft clothes!
Do not push hard!

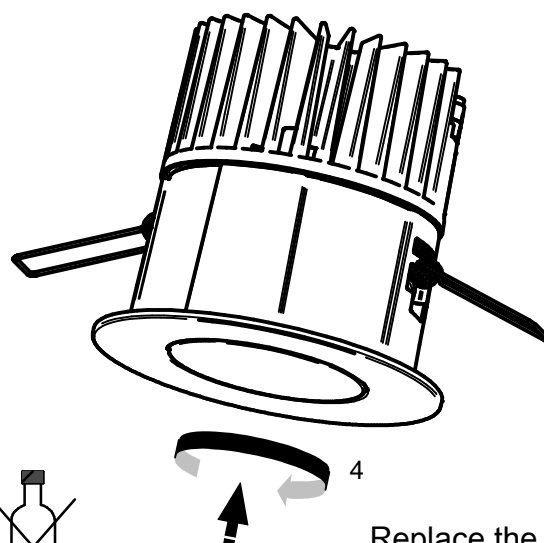

4b

Replace the new housing
and turn clockwise

© 2016 Philips Lighting Holding B.V.

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Philips Lighting Holding B.V.
The Netherlands

