




PHILIPS

CoreLine Wall mounted

WL130V

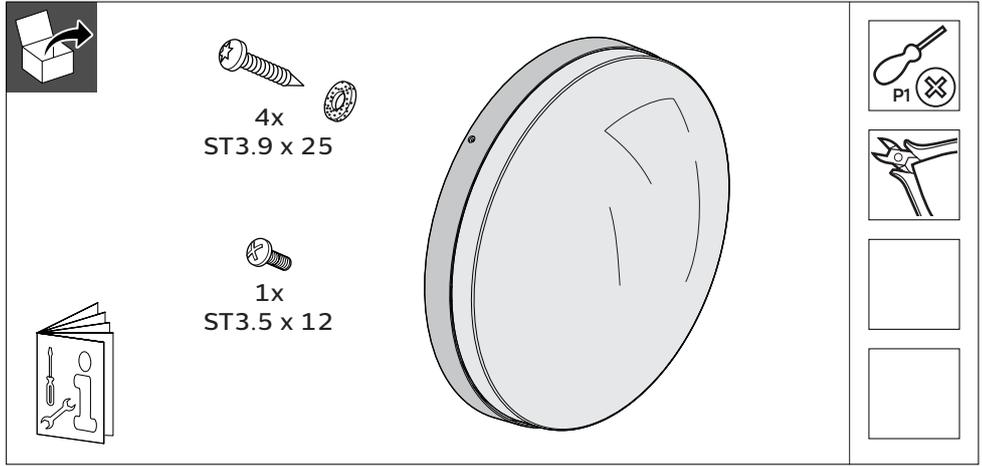

	CCT (K)	Lumen (lm)	P (W)	Driver	Options	220V 240V	50Hz 60Hz	kg
WL130V LED12S		1200	12		NA			1.15
WL130V LED20S	830 / 840	2000	22	PSU	NA	•	•	1.20
			23		MDU			



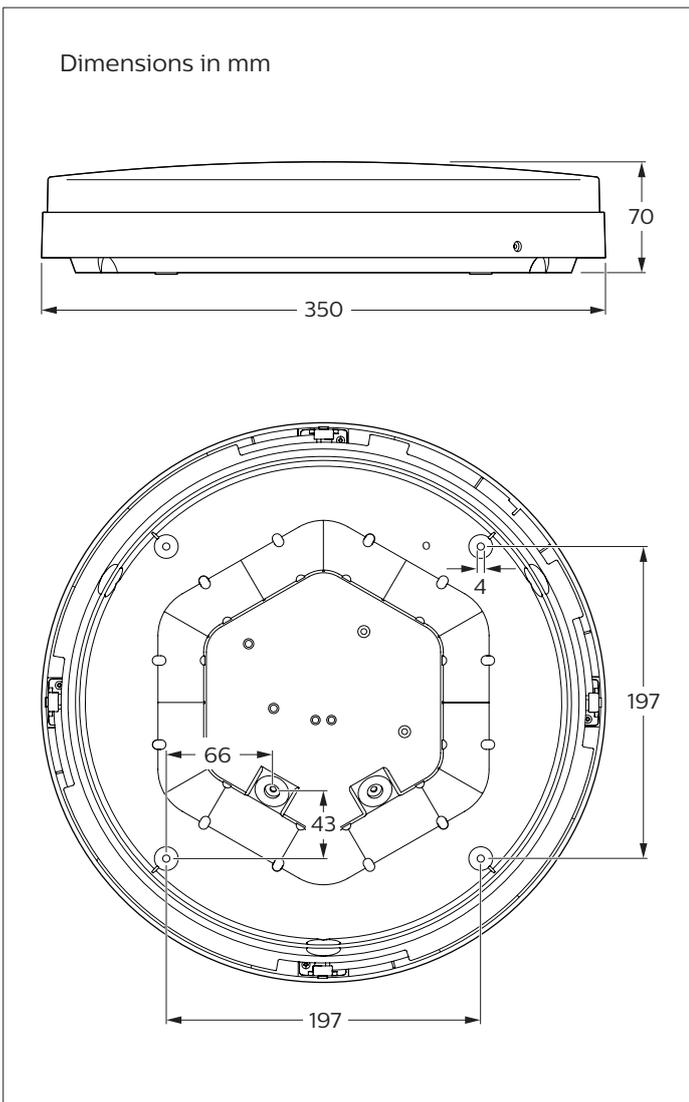


ATTENTION
OBSERVE PRECAUTIONS
FOR HANDLING
ELECTROSTATIC
SENSITIVE
DEVICES






- The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.
- This luminaire is not suitable for use as emergency lighting.
- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
- For use in environments where an accumulation of conductive dust on the luminaire may be expected.

Inrush current



	LED12S	LED20S
Electrical characteristics		
I _{max} (A)	12.3	21.3
T _{ref} (μs)	1.44	1.84
MCB	Luminaires Max.	
B-10 A	20	20
B-13 A	25	25
B-16 A	32	32
C-10 A	33	33
C-13 A	43	43
C-16 A	54	54

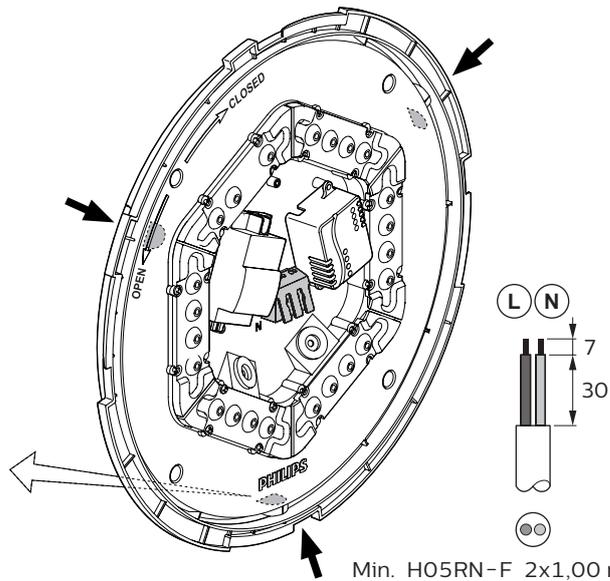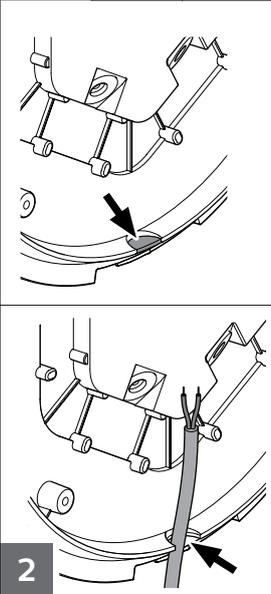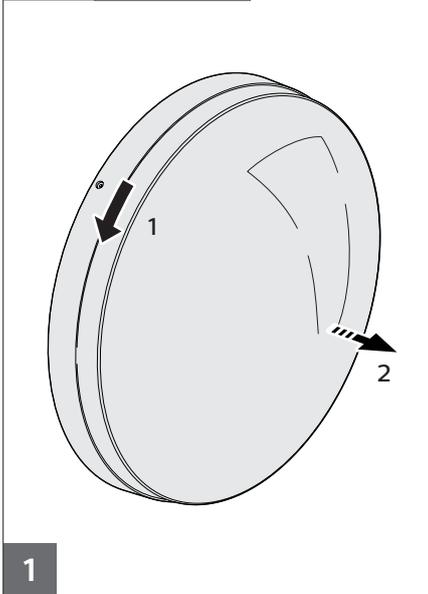


Min. H05RN-F 2x1,00 mm²
Max. H05RN-F 2x1,50 mm²
Ø6-Ø10 mm

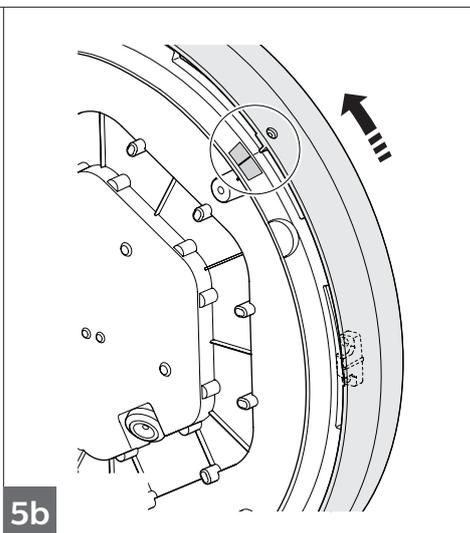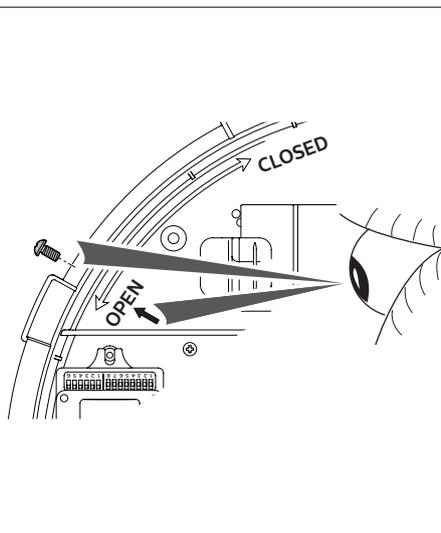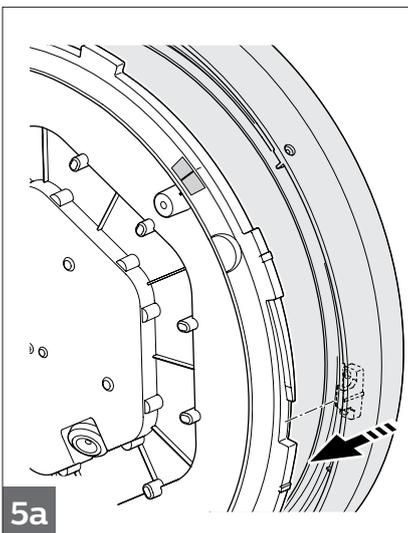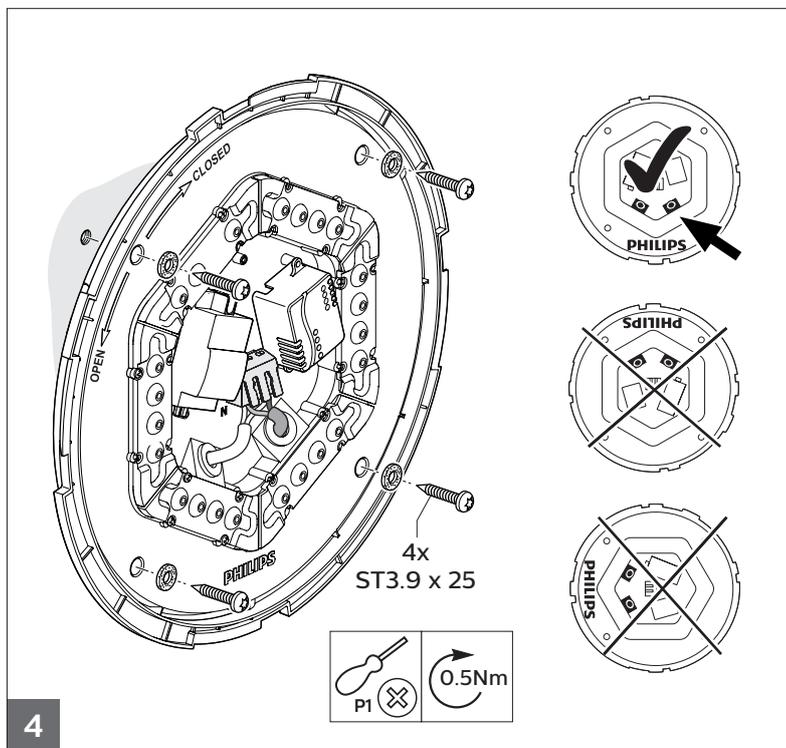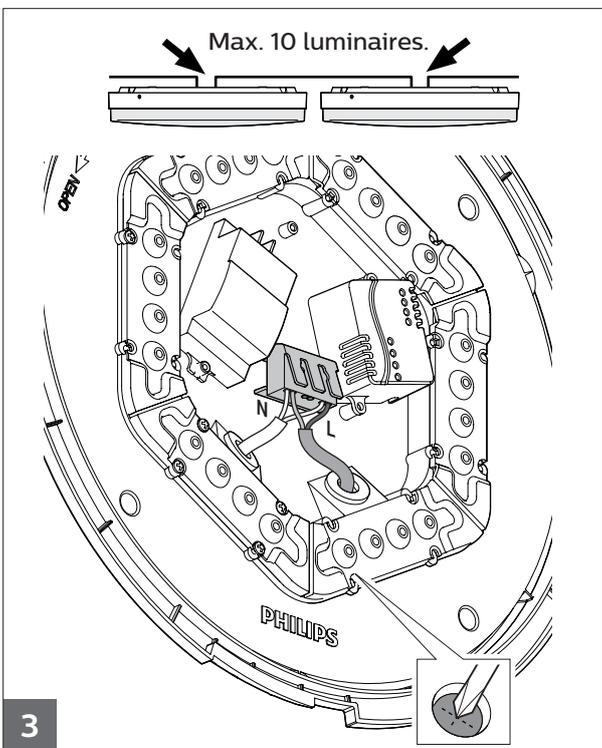

5c

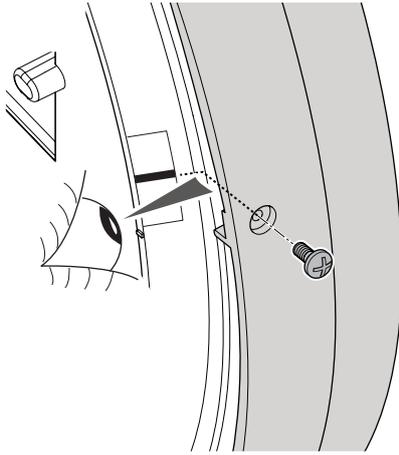

ST3.5 x 12

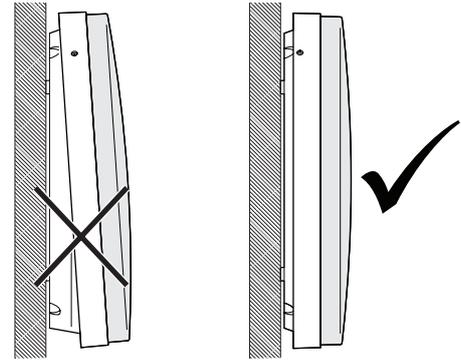

HF Motion Sensor (For WL130V LED20S MDU only).

By selecting the combination on the DIP switch, sensor data can be precisely set for each specific application.

	1	2	3	%
I	on	on	on	100
II	-	on	on	75
III	on	-	on	50
IV	-	-	on	25
V	-	-	-	10

Detection area. (default 100%)

Detection area can be reduced by selecting the combination on the DIP switches to fit precisely each application.

	4	5	6	Time
I	on	on	on	5 s
II	-	on	on	30 s
III	on	-	on	90 s
IV	-	-	on	3 min
V	on	on	-	20 min
VI	-	-	-	30 min

Hold time. (default 20 min.)


Refers to the time period the lamp remains at 100% illumination after no motion detected.

	7	8	9	Lux
I	on	on	on	2
II	on	on	-	10
III	-	on	-	25
IV	on	-	-	50
V	-	-	-	Disable

Daylight sensor. (default 10 lux.)

The sensor can be set to only allow the lamp to illuminate below a defined ambient brightness threshold.

50 lux, 25 lux: twilight operation, 10lux, 2lux: darkness operation only. When set to Disable mode, the daylight sensor will switch on the lamp when motion is detected regardless of ambient light level.



HF Motion Sensor



© 2018 Philips Lighting Holding B.V.

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Philips Lighting Holding B.V.
The Netherlands