



產品說明

ActiLume 1-10V

ActiLume 1-10 V 可連接至 HF-R 安定器的 1-10 V DC 控制輸入，ActiLume 1-10 V 經過校準，可應用於安裝了 600 勒克斯與 500 勒克斯的標準情境

优点

- A daylight-regulation/presence-detection device which can easily be fitted in a 1-10 V luminaire
- The sensor can be connected to the ballast directly (only dimming) or in combination with the SwitchBox (dimming and switching)
- Offers easy-to-install energy-saving solutions
- Has the same form fit as the ActiLume DALI & ActiLume MicroLuxSense sensor with cover

特点

- If needed, ActiLume 1-10 V can be adjusted manually, using a rotating diaphragm to adjust the set point
- The sensitivity of the sensor can be changed within a range from 1/3 to 3
- With the rotary control it is possible to select a delay time between 1 and 30 minutes
- In combination with the SwitchBox, up to 3 HFR 254 T5 ballasts can be switched, resulting in extremely low stand-by losses (< 350 mW)
- Personal control via the Touch and Dim functionality on the SwitchBox
- Push-button to activate 100 hours burn-in mode for the lamps

应用


- ActiLume 1-10 V 專為各種室內應用設計
- ActiLume 1-10 V 專為最高 3.5 公尺的天花板高度設計

ActiLume 1-10V

Versions



二维绘图

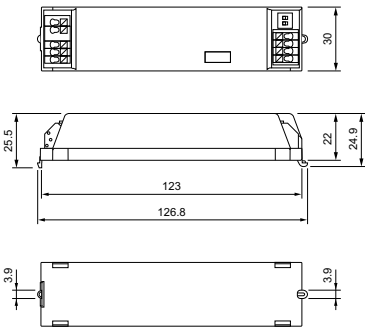

Product
LRI1655/05 ActiLume 1-10V Sensor 100cm W
LRI1655/06 ActiLume 1-10V Sensor 100cm D

产品详细



