

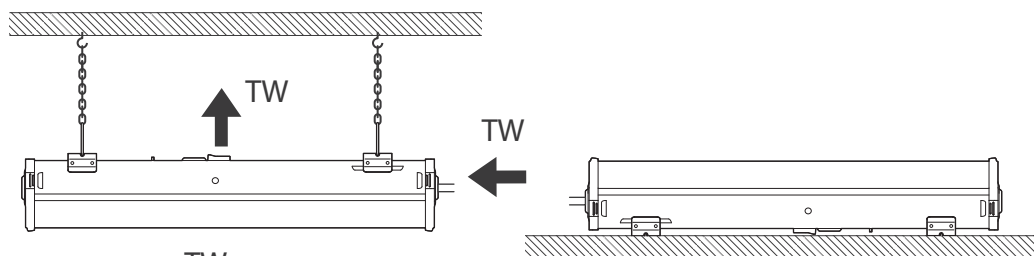
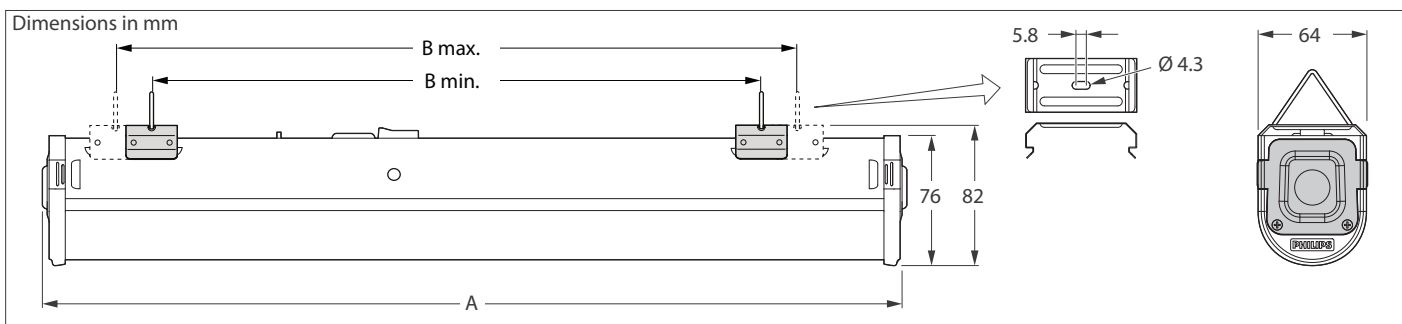


Coreline Batten

BN124C ELB3




	Phom (W)	Pmax (W)	A(mm)	Bmin(mm)	Bmax(mm)	
BN124C LED41S/840 PSU ELB3 TW1 L1200	42	46	1134	876	924	2,18
BN124C LED64S/840 PSU ELB3 TW1 L1500	60	64	1416	1176	1224	2,55

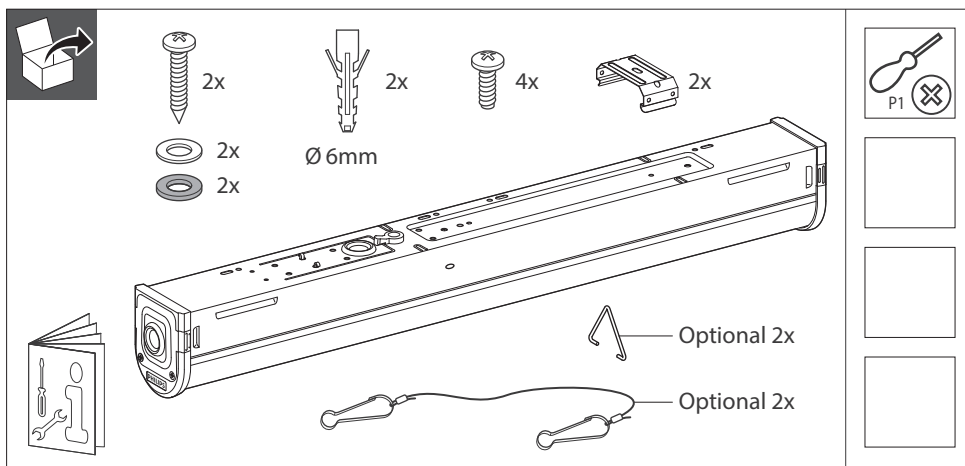







TW

Max. number of connected luminaire 10X



ATTENTION
OBSERVE PRECAUTIONS
FOR HANDLING
ELECTROSTATIC
SENSITIVE
DEVICES

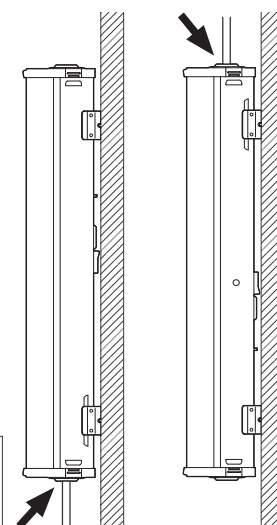

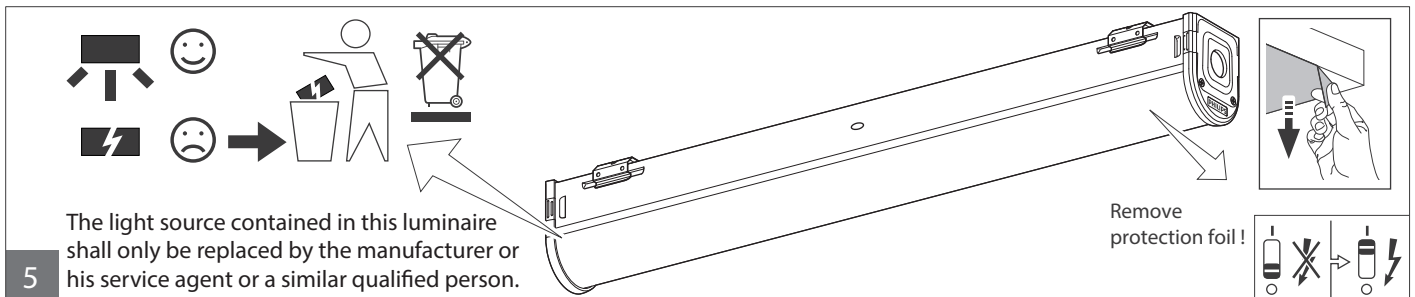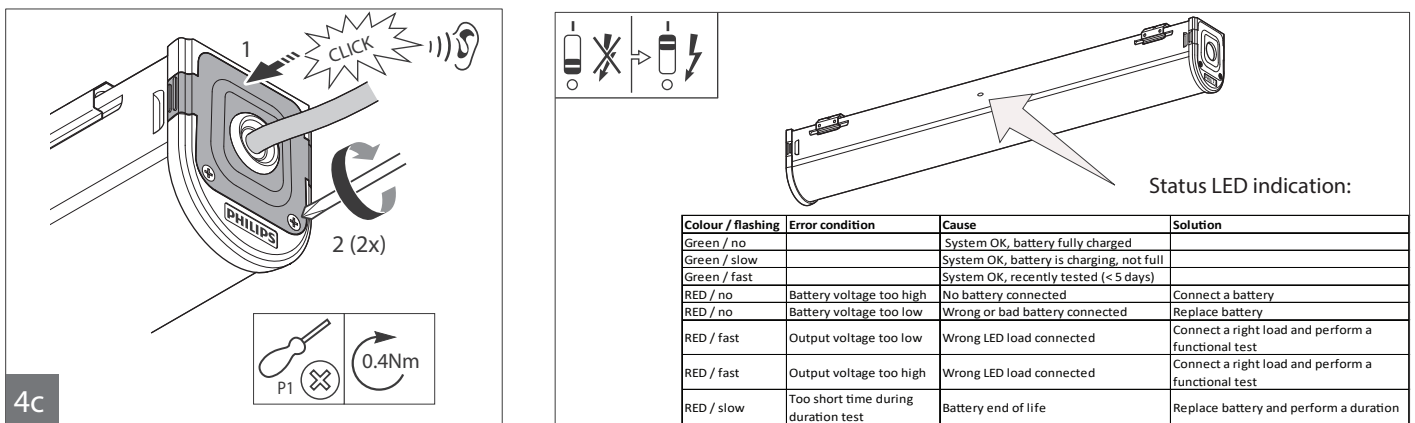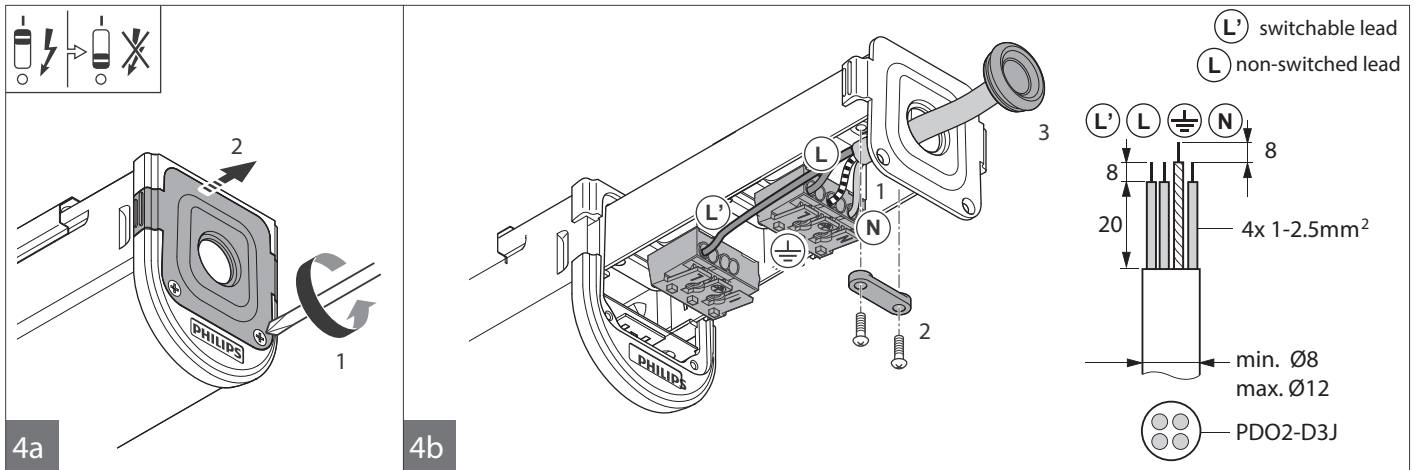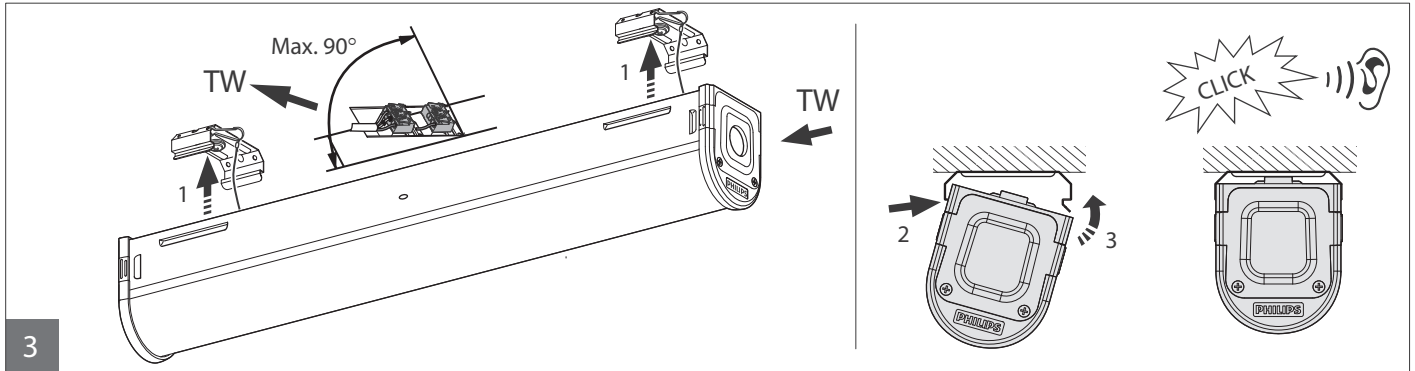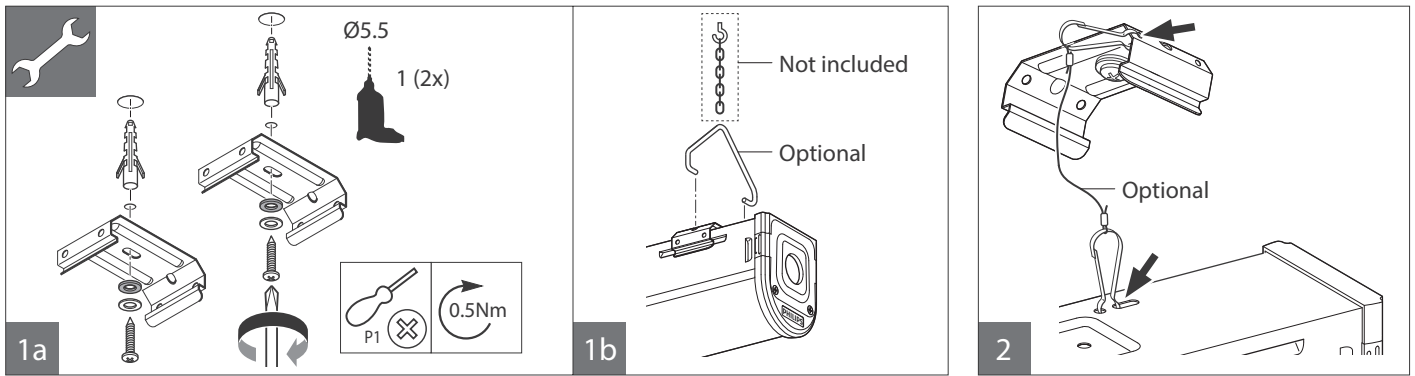




Emergency Luminaires with Batteries

Date of

A

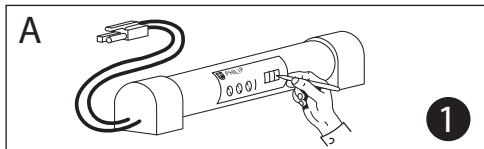


1


No tie wrap



2

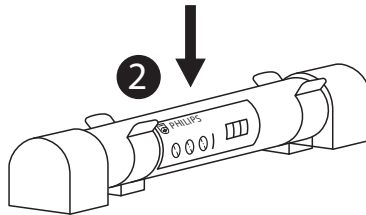

Log book




3


Test high voltage max. 500V




Caution, risk of electric shock!

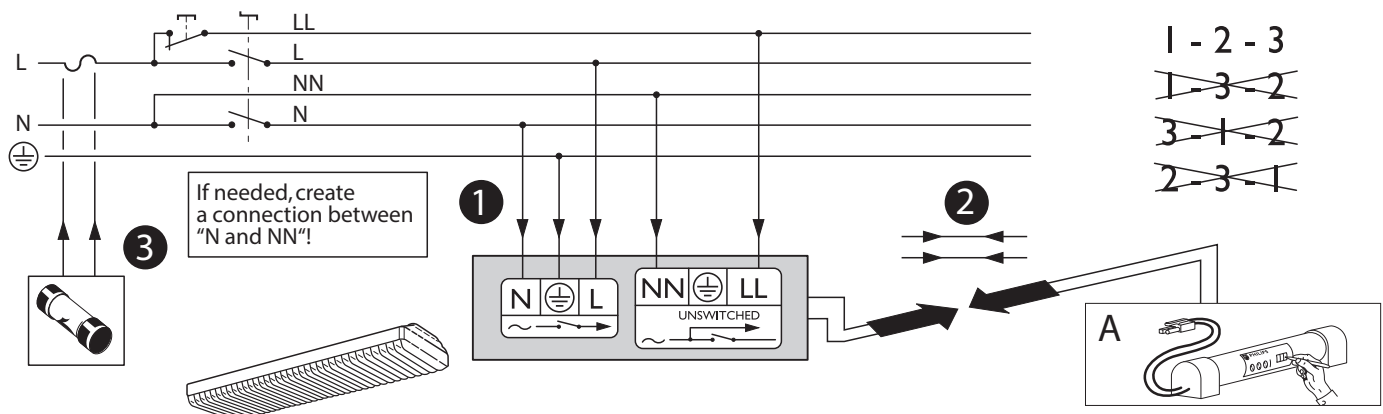

Charge time



Test: min. 5 s

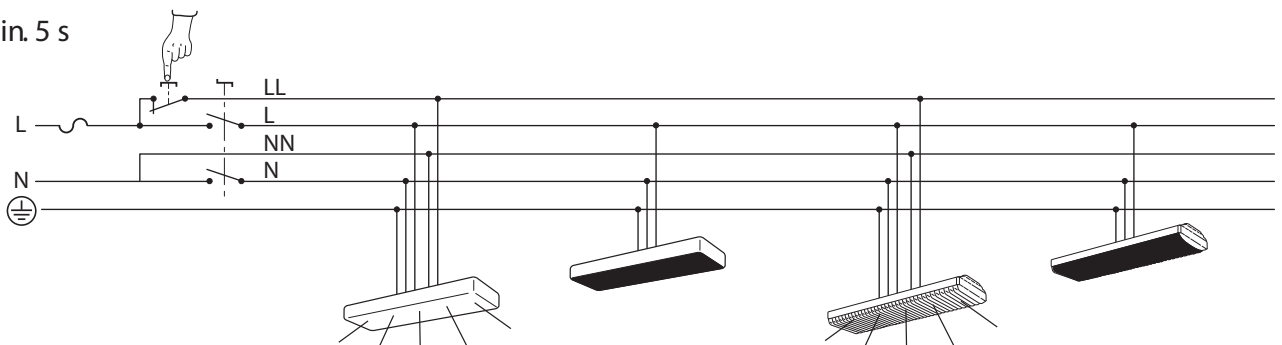

Lifetime

The batteries have a life time expectancy of 4 years when maintained properly. Replace after that time!

Periodic testing




Periodic tests should be performed according to EN50172: 2004, clause 7.2.3 and 7.2.4.

Each month the driver is running in emergency mode for 30 seconds.


Once a year a full discharge cycle of at least 3 hrs should be performed.

The tests could be done by complete disconnection of the luminaire.


Replacement Battery

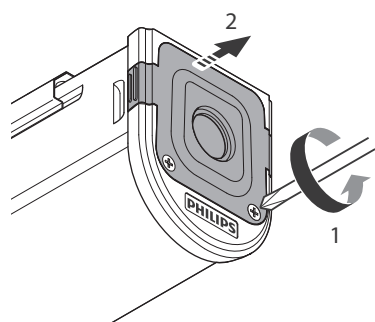


1

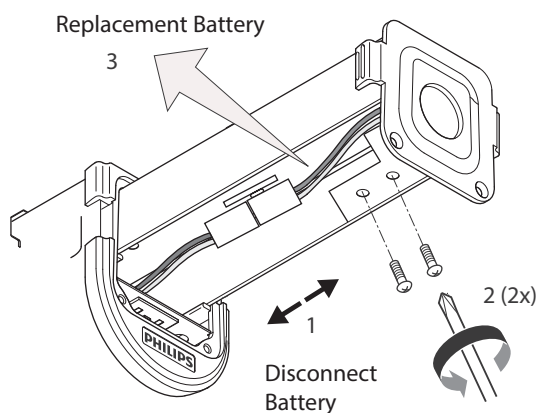


2

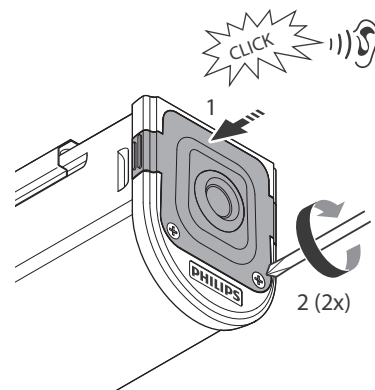

3




Inrush current

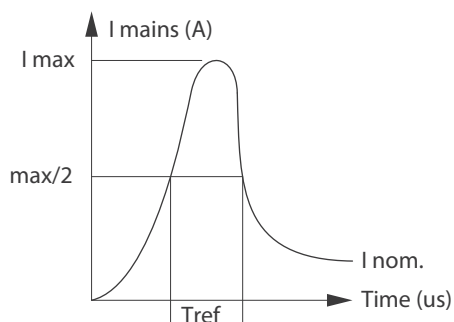

	LED41S L1200	LED64S L1500
Electrical characteristics		
Inom (mA)	290	370
I _{max} (A)	8	8
T _{ref} (μs)	60	60
MC	Max. number of connected Luminaires	
B-10 A	1	15
B-16 A	24	24
C-10 A	24	24
C-16 A	40	40

Light intensity distribution curves



Rated lumen output in emergency mode: 500lm

© 2018 Signify Holding

All rights reserved. This document contains information relating to the product portfolio of Signify which information may be subject to change. No representation or warranty as to the accuracy or completeness of the information included herein is given and any liability for any action in reliance thereon is disclaimed. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.. All other trademarks are owned by Signify Holding or their respective owners.

Signify Holding.
The Netherlands

