



LED Office Lum. RC099V

Mounting instruction


V1.0



Product Type	Size LxWxH(mm)	lumen output	Power	Voltage	Frequency	CCT	kg
RC099V LED26S W60L60 GM	597x597x75	2600lm	29W	220-240V~	50/60Hz	4000K/6500K	2.5
RC099V LED26S W30L120 GM	1197x297x75						2.5
RC099V LED26S W60L60 SUS GM	603x603x75						2.6
RC099V LED26S W30L120 SUS GM	1203x303x75						2.6
RC099V LED26S W60L60 PCV GM	603x603x75						2.6
RC099V LED26S W30L120 PCV GM	1203x303x75						2.6
RC099V LED36S W60L60 GM	597x597x75	3800lm	34W				2.5
RC099V LED36S W30L120 GM	1197x297x75						2.5
RC099V LED36S W60L60 SUS GM	603x603x75						2.6
RC099V LED36S W30L120 SUS GM	1203x303x75						2.6
RC099V LED36S W60L60 PCV GM	603x603x75						2.6
RC099V LED36S W30L120 PCV GM	1203x303x75						2.6

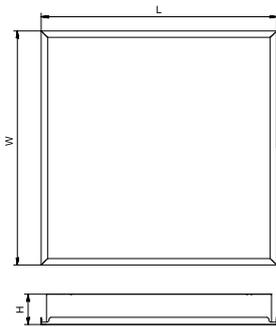


RC099V LED26S W60L60 GM
RC099V LED26S W60L60 SUS GM
RC099V LED26S W60L60 PCV GM
RC099V LED36S W60L60 GM
RC099V LED36S W60L60 SUS GM
RC099V LED36S W60L60 PCV GM

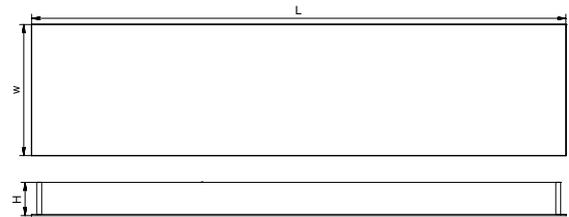

RC099V LED26S W30L120 GM
RC099V LED26S W30L120 SUS GM
RC099V LED26S W30L120 PCV GM
RC099V LED36S W30L120 GM
RC099V LED36S W30L120 SUS GM
RC099V LED36S W30L120 PCV GM


A Recessed

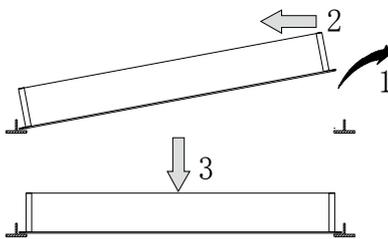

RC099V LED26S W60L60 GM
RC099V LED26S W30L120 GM
RC099V LED36S W60L60 GM
RC099V LED36S W30L120 GM

Adjust the luminaire position to fit ceiling well

B Suspend mount



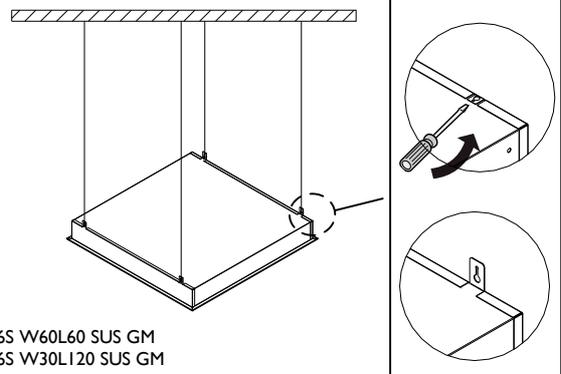




RC099V LED26S W60L60 SUS GM
RC099V LED26S W30L120 SUS GM
RC099V LED36S W60L60 SUS GM
RC099V LED36S W30L120 SUS GM

The chain is not included in package

LED Office Lum. RC099V Mounting instruction

V1.0
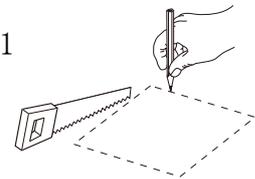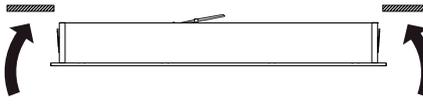
<p>C Gypsum board mount</p> <p>1</p>  <p>Cutout size: W60L60: 584*584mm(±2mm) W30L120:284*1184mm(±2mm) Ceiling thickness:2mm~16mm</p> <p>RC099V LED26S W60L60 PCV GM RC099V LED26S W30L120 PCV GM RC099V LED36S W60L60 PCV GM RC099V LED36S W30L120 PCV GM</p>	<p>2</p> 	<p>4</p> 
<p>3</p> 	<p>5</p>  <p>Adjust the luminaire position to fit ceiling well</p>	
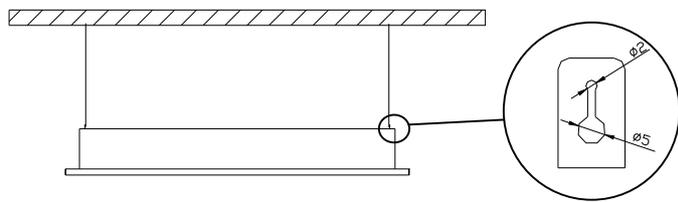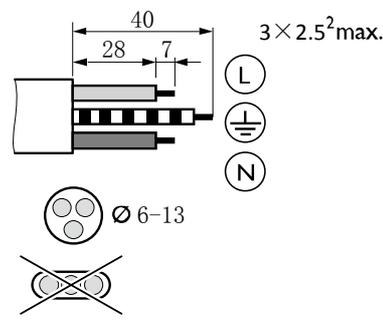
<p>Safety chain</p>  <p>The product (include A、C mounting types) should install safety chain (Safety chain is not included in package).</p>	<p>Wiring Method</p>  <p>Please use IP20 or above terminal box (dimension can't smaller than 10x20x25), it is not provided by Philips.</p>
--	--

	<p>Please read this manual carefully before using the product.</p> <ol style="list-style-type: none"> 1. For indoor use only. 2. The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements. 3. Do not switch on before complete installation. 4. The luminaire shall under no circumstances be covered or abutted with building insulation or be installed in a residential installation. 5. The cable of the luminaire should use "Z" type connection. The luminaire has to be scrapped if the wire broken. 6. The luminaire is complied to IEC 60598. 7. Safety chain is necessary.
---	--

	<p>This marking indicates that this product should not be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmental safe recycling.</p>
---	---