ER-FK

Emergency Remote Field Kit

Catalog Num	ber:	
Туре:		
Project:		

+_		
-		H

Description

The ER-FK works in conjunction with a Compact Fluorescent AC ballast to convert luminaires to emergency lighting.

Features

- Nickel Cadmium battery.
- 90 minutes of emergency operation.
- Mounting bracket includes BH1 Barhangers.
- Includes threaded body test switch (TBTS)
- Junction box supplied by others.
- UL listed.

CATALOG SYSTEM

SAMPLE CATALOG NUMBER: ER-FK

ER-FK

Emergency Remote Field Kit1,2,3,4

Footnotes:

- 1. IOTA-I-42-EM-A
- 2. UL Listed for dry location
- 3. UL Listed for direct contact with thermal insulation.
- 4. Remote mounting available up to 3 feet from luminaire.


SPECIFICATIONS

- 1. Battery High temperature nickel cadmium ballast for 4-pin CFL lamps. 90 minute AC output. Operating temperature 0° to 55° C. Dual voltage120/277V. 60Hz.
- 2. Lamps Operated 10-42 watt 4-pin rapid start triple or quad tube CFL lamps.
- 3. Mounting Mounting Pan constructed of 18GA galvanized steel and includes pre-installed BH1 bar hangers.
- 4. Bar Hangers Pre-installed Quick-Lok BH1bar hangers are equipped with heavy duty fluted nails, to allow for t-grid or wood joist applications.
- 5. **UL Listed** Dry location and for direct contact with thermal insulation.
- 6. Threaded Body Test Switch TBTS to be mounted in junction box (provided by others) in the ceiling tile adjacent to the fixture within 18 inches.

1 LAMP	LUMEN OUTPUT
13 watt	350
18 watt	350
26 watt	425
32 watt	600
42 watt	<i>75</i> 0

^{*}For two lamp operation, consult factory.

DIMENSIONS

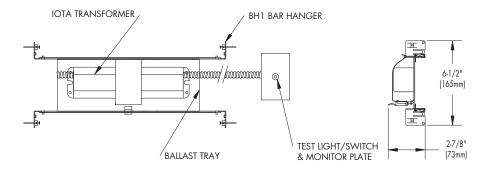

REV. 12/07

