



BRACKETS

TECHINAL INFORMATION

CONTEMPORARY BRACKET



TRADITIONAL BRACKET



CONTEMPORARY BRACKET



TRADITIONAL BRACKET



RNS20
YR-M-RNA
> P106

S55C2
CRF-1A
R80A-14
> P106

RN20-SMA-GRD
YR4-2
RTA608N-28-PSYRS
> P125/138



RN20-SMA-GRD
YR4-1A
RTA608N-28-MPL
RNS20
YR-F-12-180deg-RNA
> P125/106

RN20-SMA-GRD
YR6-1A
RTA608N-28
> P125

RN20-SMA-GRD
YR8-1A
RTA608N-28
> P125


CONTEMPORARY BRACKET



TRADITIONAL BRACKET




CONTEMPORARY BRACKET

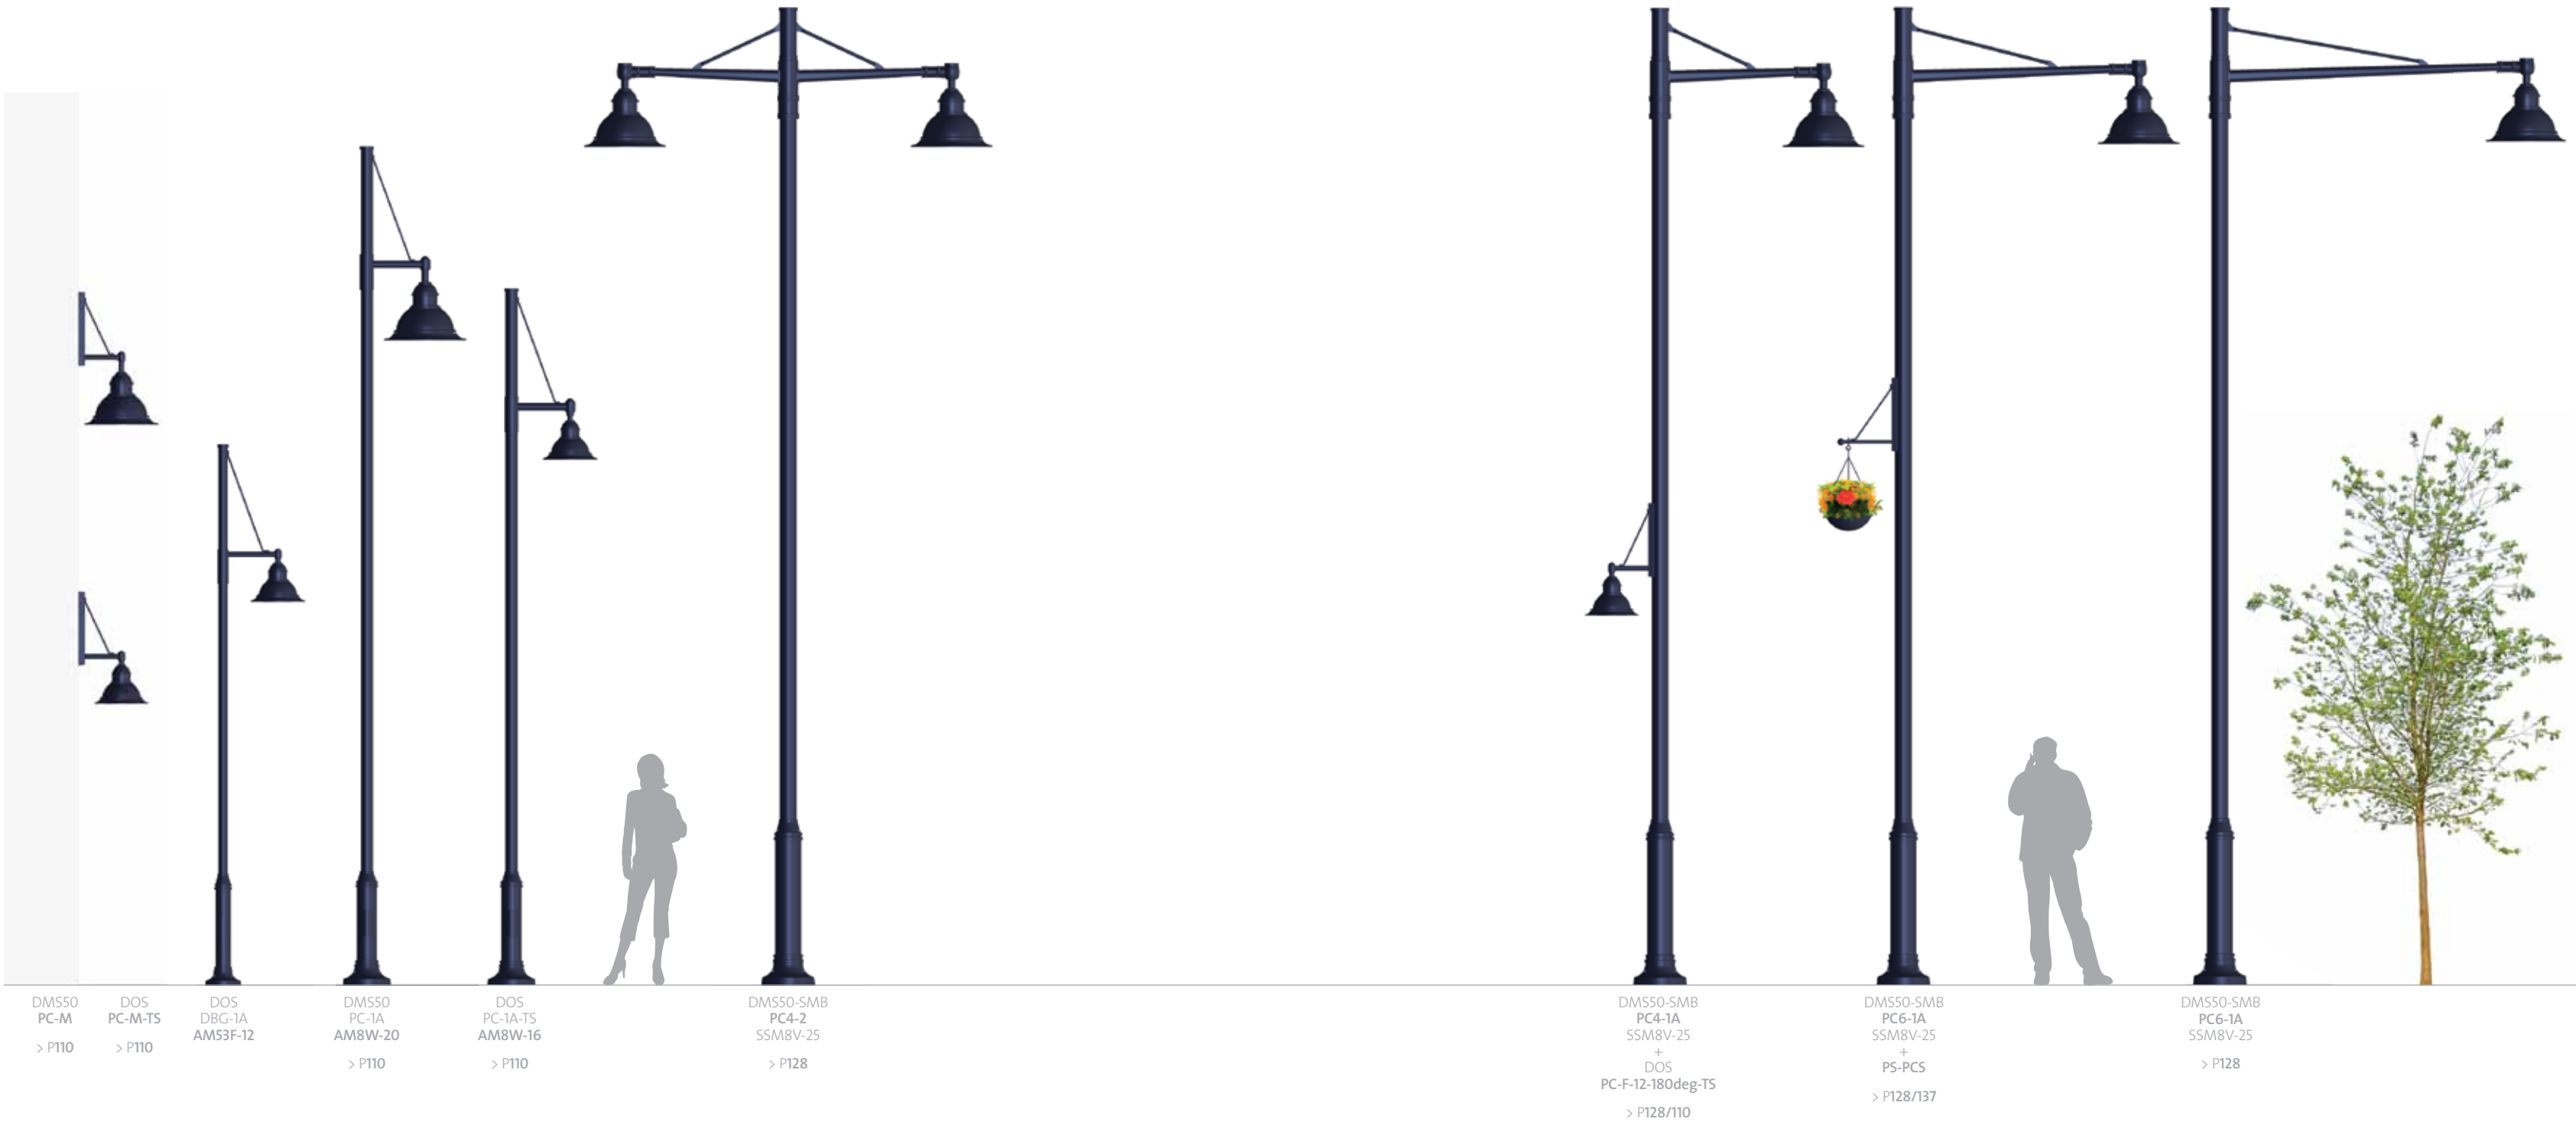

TRADITIONAL BRACKET



CONTEMPORARY AND TRADITIONAL BRACKET

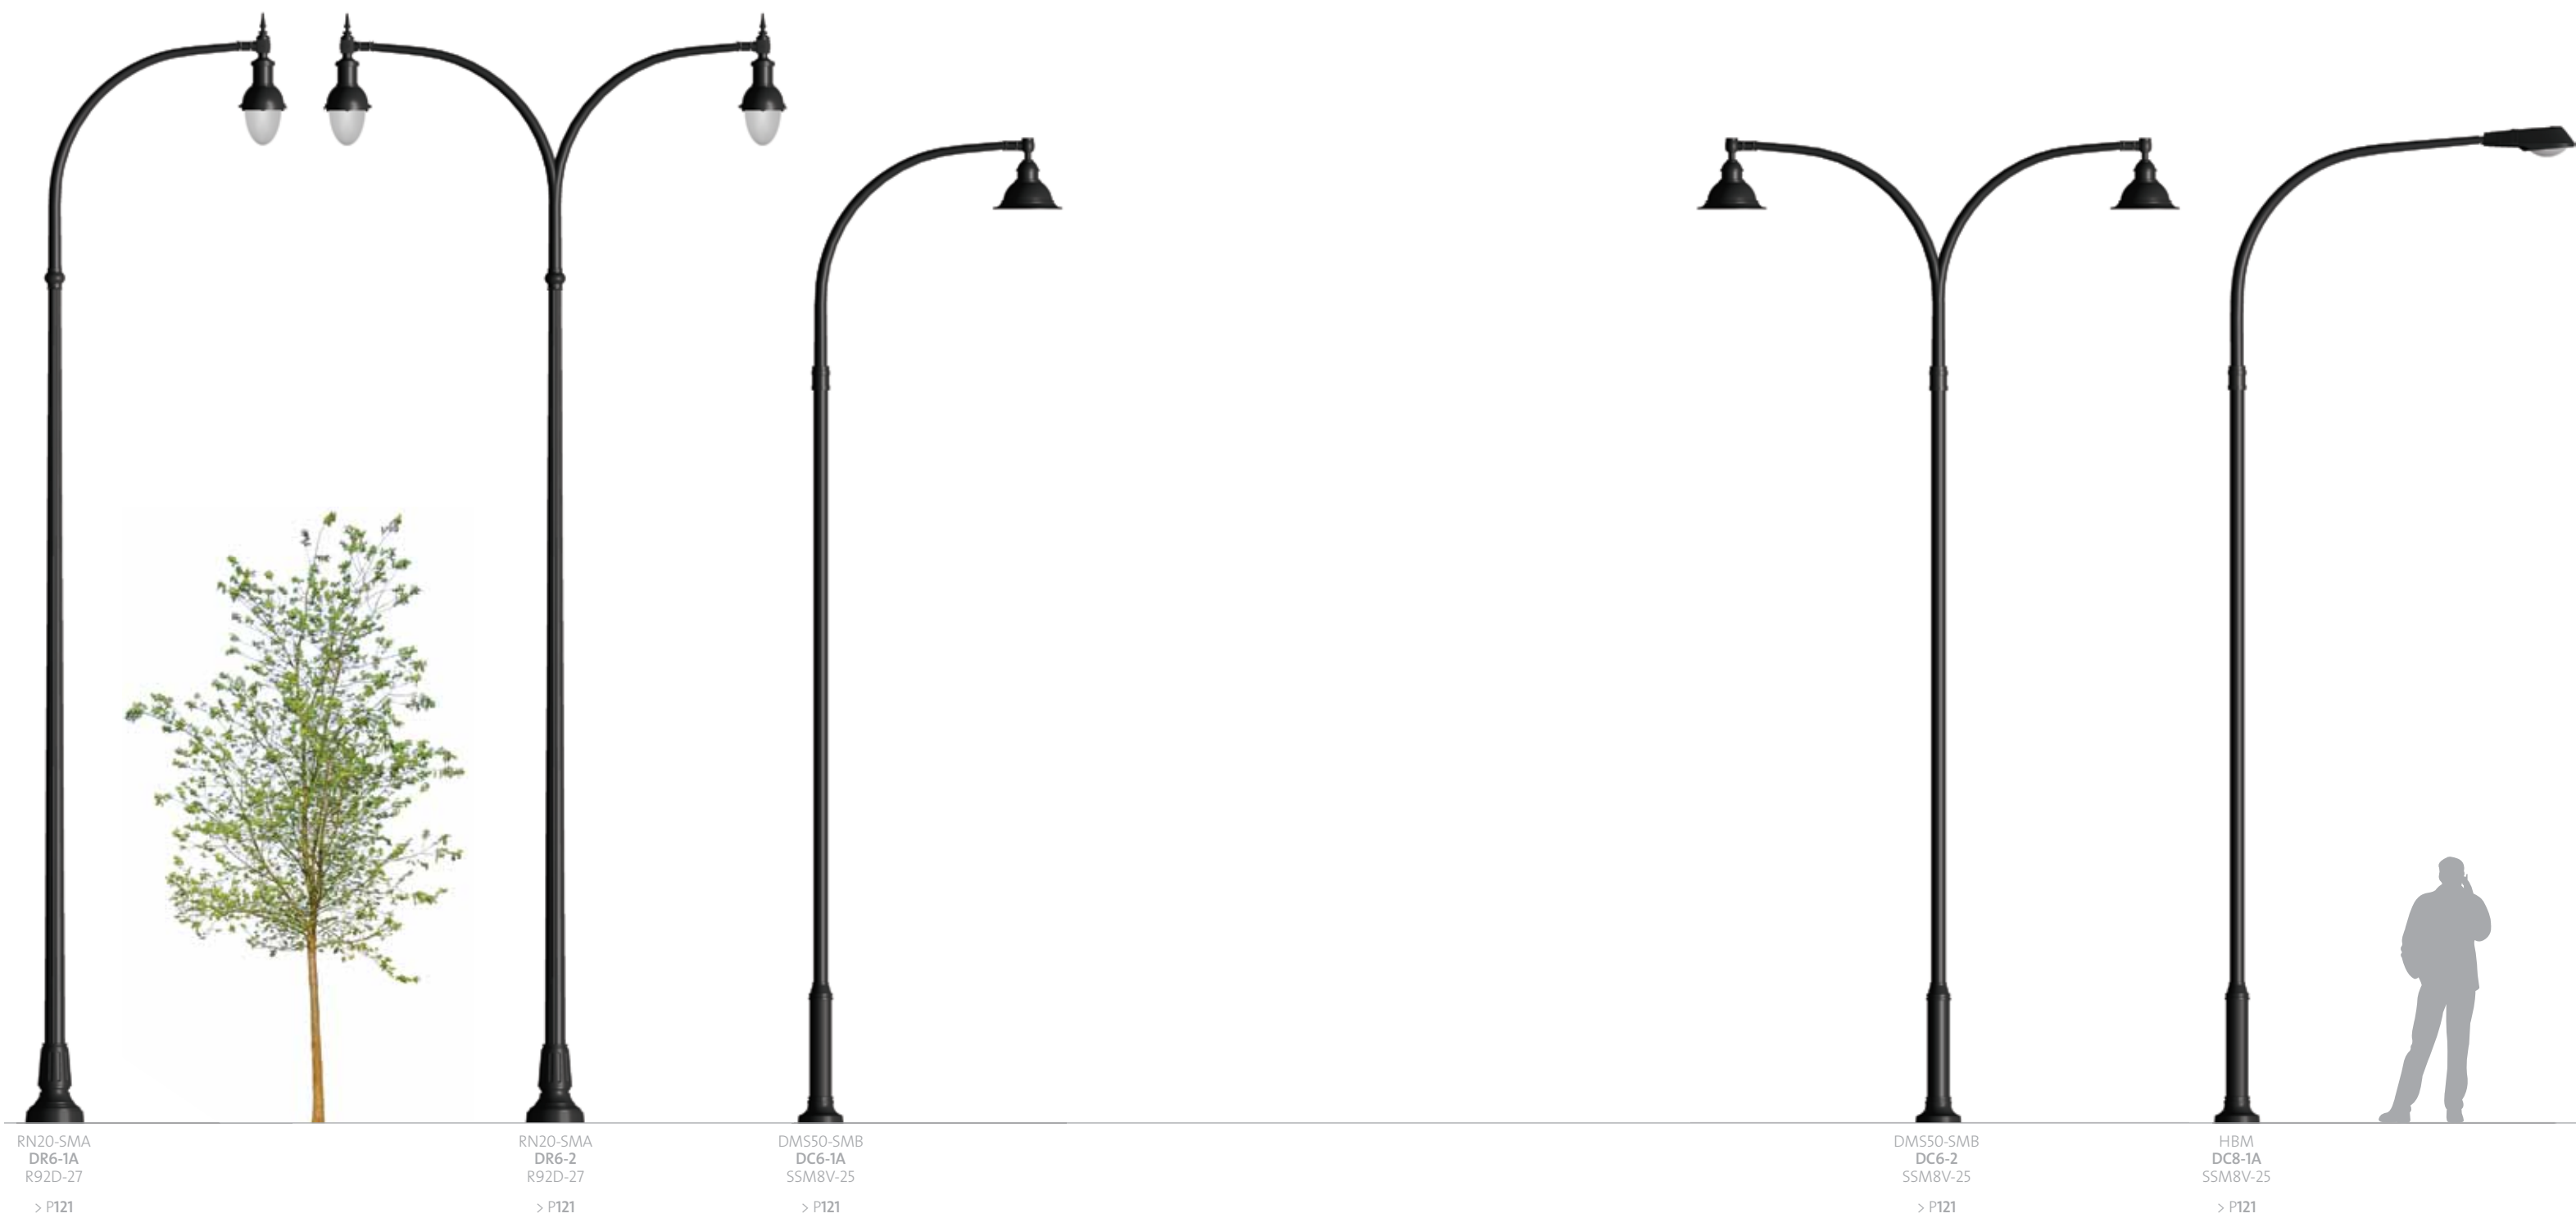

RN20-SMA
DR6-1A
R92D-27
> P121


RN20-SMA
DR6-2
R92D-27
> P121

DM550-SMB
DC6-1A
SSM8V-25
> P121




DM550-SMB
DC6-2
SSM8V-25
> P121

HBM
DC8-1A
SSM8V-25
> P121


> CAST BRACKETS

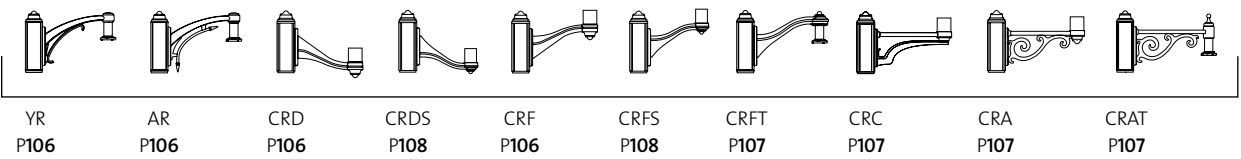



> SHORT & MEDIUM REACH BRACKETS

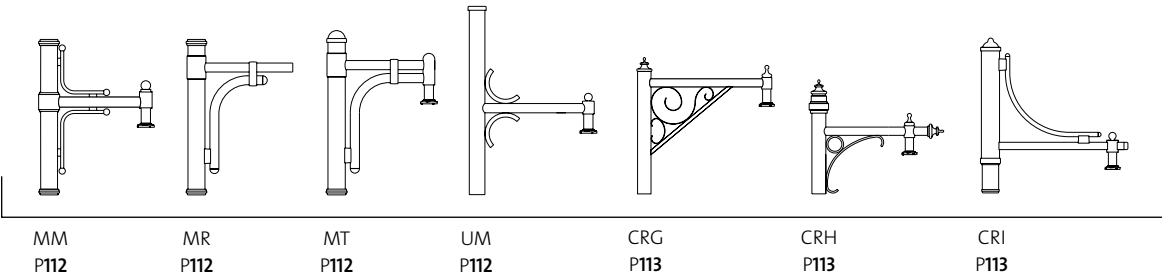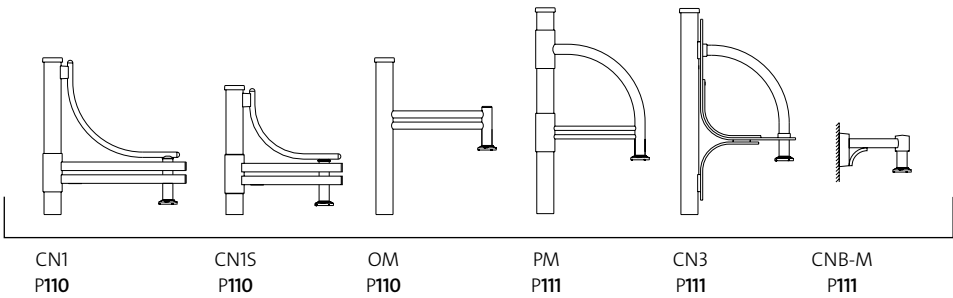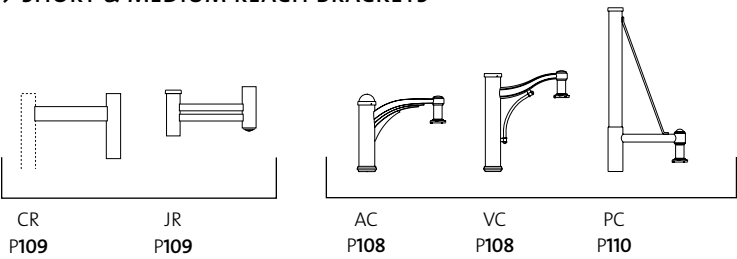




> GOOSE NECK BRACKETS

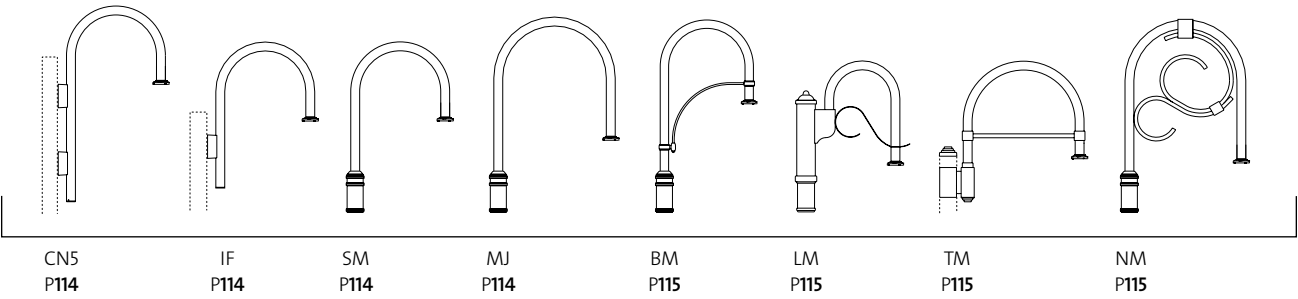

> CLAMP-ON BRACKETS

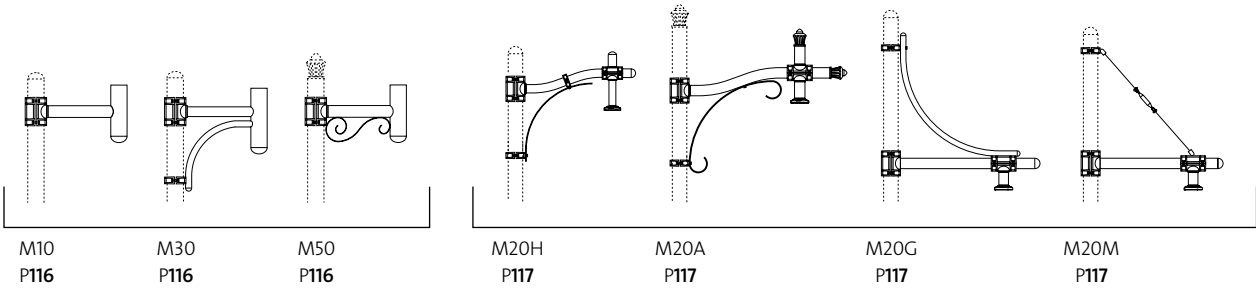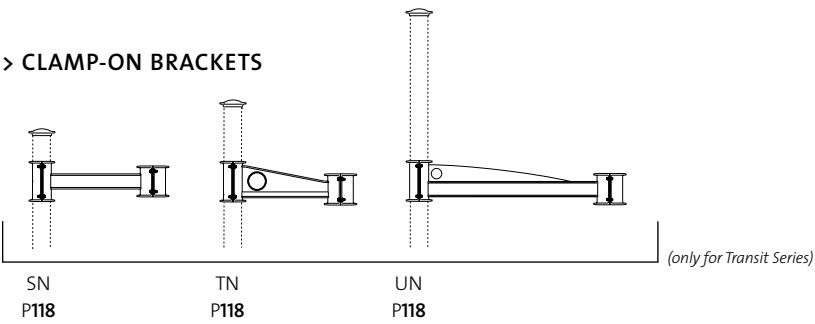


> EXTENDED REACH BRACKETS

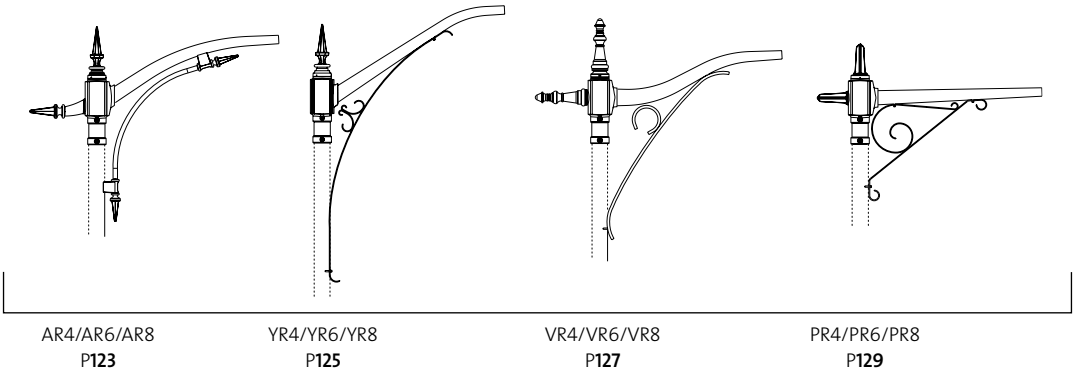
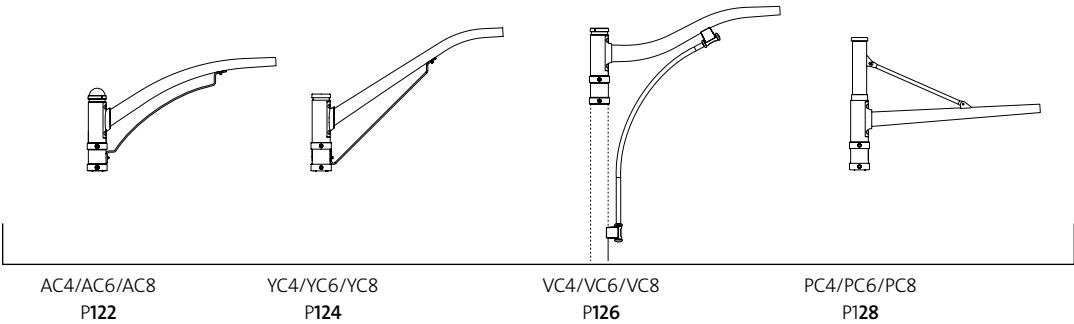
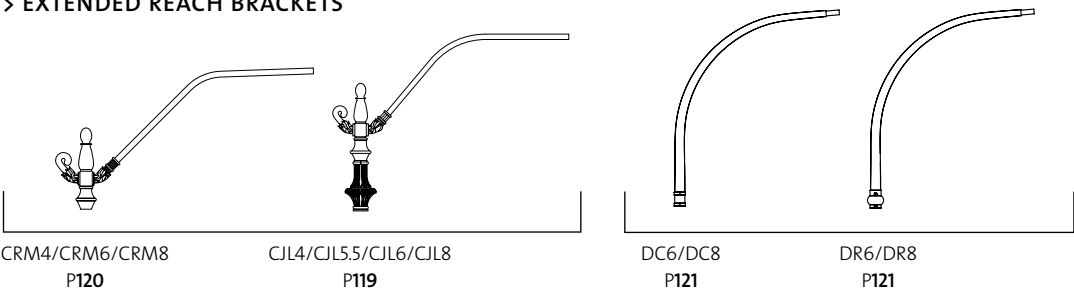


BRACKET INDEX > CONTEMPORARY AND TRADITIONAL BRACKETS


> CAST BRACKETS

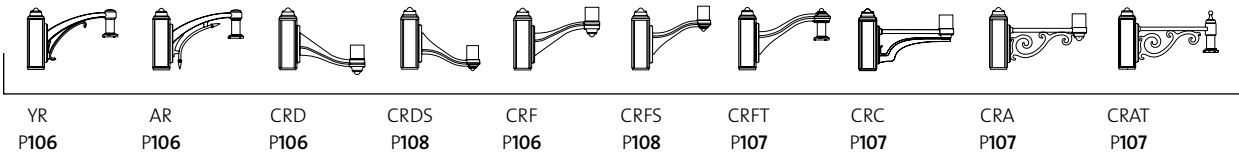



> SHORT & MEDIUM REACH BRACKETS

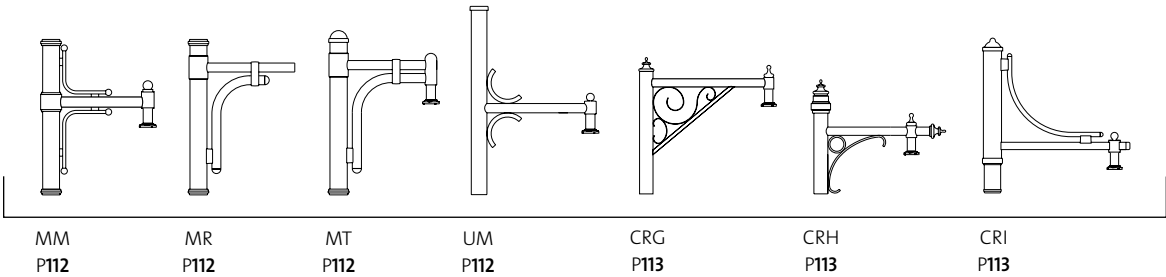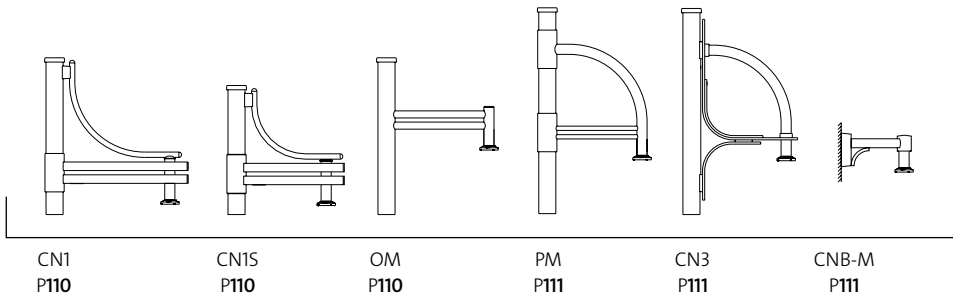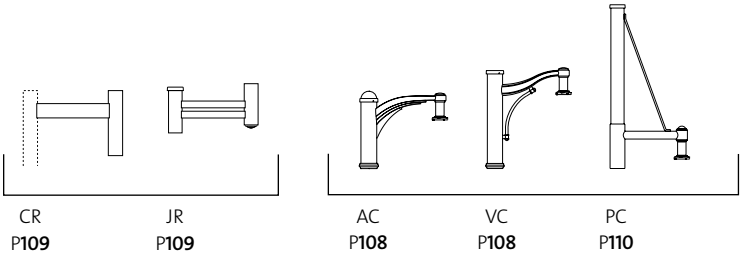


> GOOSE NECK BRACKETS

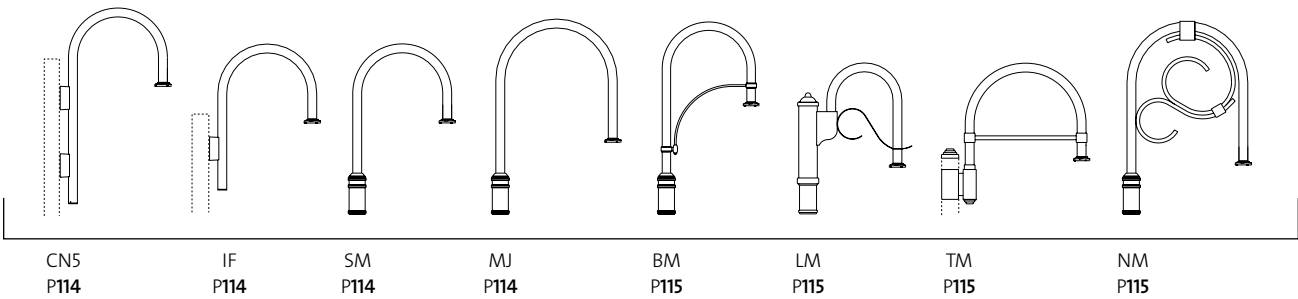

> CLAMP-ON BRACKETS

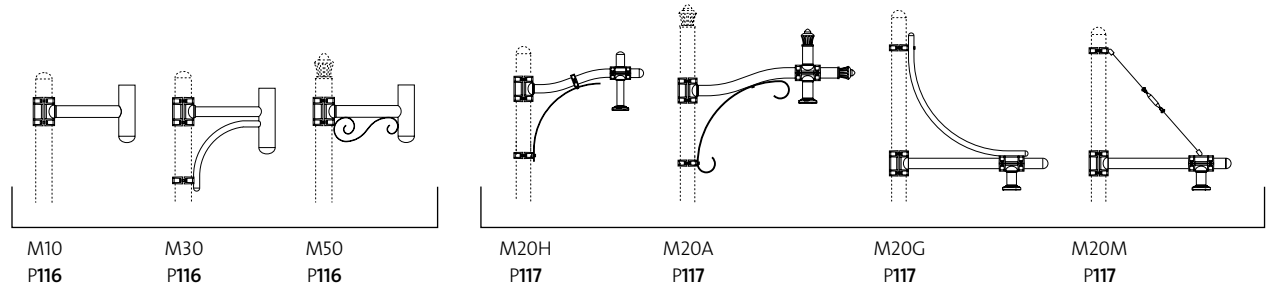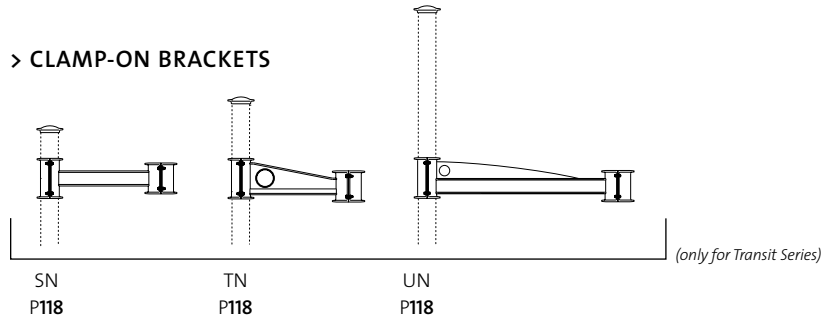


> EXTENDED REACH BRACKETS

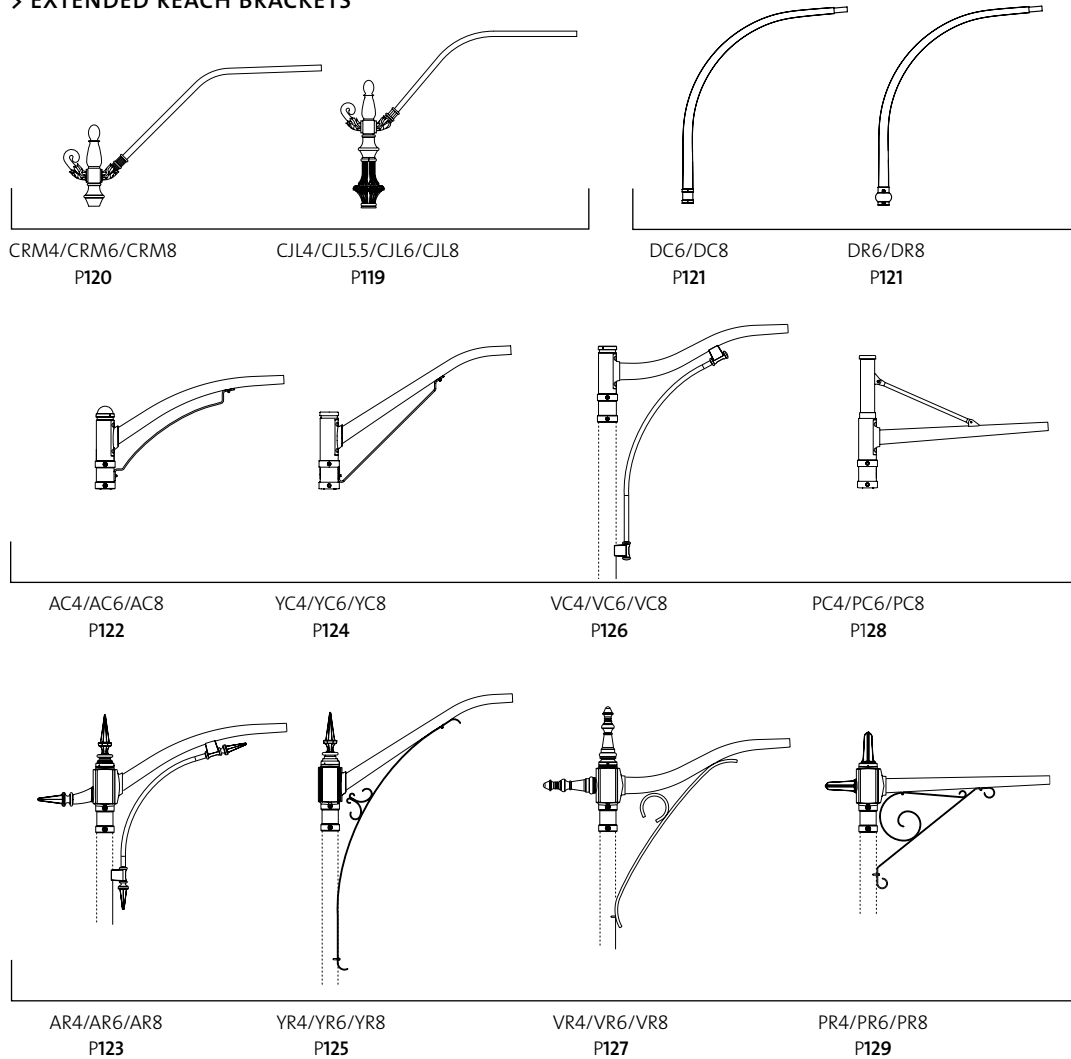


YR

EPA: 1.30 sq.ft. Weight: 40.0 lbs. (18.1 kg)

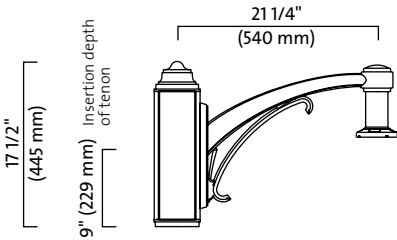


AR

EPA: 1.35 sq.ft. Weight: 40.0 lbs. (18.1 kg)

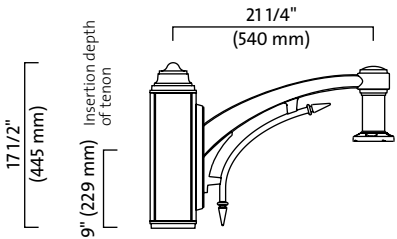


CRD

EPA: 1.34 sq.ft. Weight: 25.0 lbs. (11.3 kg)

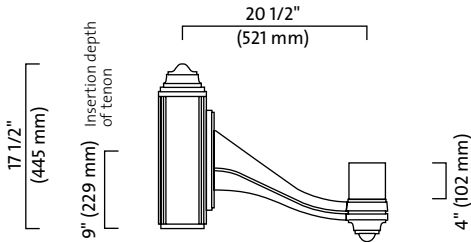

CRF

EPA: 1.34 sq.ft. Weight: 25.0 lbs. (11.3 kg)

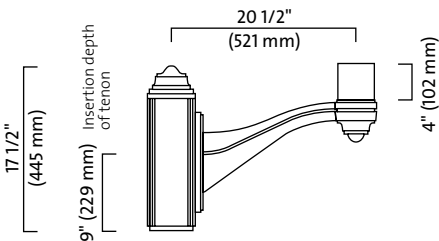

Specifications:

The YR / AR mounting arms feature a cast-aluminum curved arm and a decorative element welded to a cast-aluminum plate.

The luminaire adaptor will accept a luminaire equipped with Lumec's four-bolt mounting system.

The YR / AR plates are mechanically fastened using stainless steel hardware to a central pole adaptor slip-fitting 9" (229 mm) over a 4" (102 mm) O.D. pole or tenon.

Configurations							Mid-pole Configurations		
							> with pole option MPL		
1A	2	2A	3B	4	M	F	F	2F	

Specifications:

The CRD / CRF mounting arms feature a cast-aluminum curved arm mechanically assembled to a cast-aluminum plate.


The mounting arms are equipped with a 4" round (102 mm) by 4" high (102 mm) tenon for luminaire mounting.

The CRD / CRF plates are mechanically fastened by stainless steel hardware to a central pole adaptor slip-fitting 9" (229 mm) over a 4" (102 mm) O.D. pole or tenon.

Configurations										Mid-pole Configurations		
										> with pole option MPL		
1A	2	2A	3A	3B	4	4A	5	M	F	F	2F	

CRA

EPA: 1.40 sq.ft. **Weight:** 16.0 lbs. (7.3 kg)

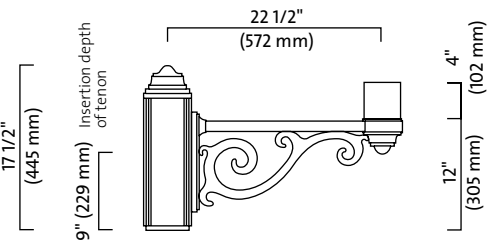

Specifications:

The **CRA** mounting arm features a seamless 1" x 2" (25 x 51 mm) rectangular extruded aluminum tube and cast decorative scroll, welded to a cast-aluminum plate.

The mounting arm is equipped with a 4" round (102 mm) by 4" high (102 mm) tenon for luminaire mounting.

The **CRA** plate is mechanically fastened using stainless steel hardware to a central pole adaptor slip-fitting 9" (229 mm) over a 4" (102 mm) O.D. pole or tenon.

Configurations




Mid-pole Configurations

> with pole option MPL



CRAT

EPA: 1.45 sq.ft. **Weight:** 37.0 lbs. (16.8 kg)

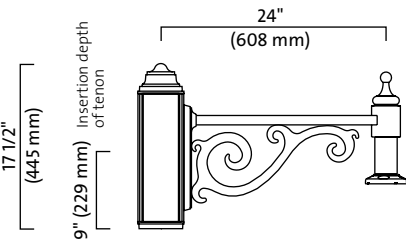


Specifications:

The **CRAT** mounting arm features a seamless 1" x 2" (25 x 51 mm) rectangular extruded aluminum tube and cast decorative scroll, welded to a cast-aluminum plate.

The luminaire adaptor will accept a luminaire equipped with Lumec's four-bolt mounting system.

The **CRAT** plate is mechanically fastened using stainless steel hardware to a central pole adaptor slip-fitting 9" (229 mm) over a 4" (102 mm) O.D. pole or tenon.

Configurations




Mid-pole Configurations

> with pole option MPL



CRC

EPA: 1.39 sq.ft. **Weight:** 17.0 lbs. (7.7 kg)

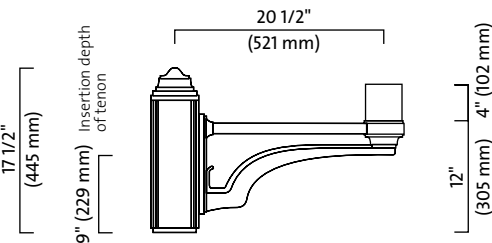


Specifications:

The **CRC** mounting arm features a seamless 1" x 2" (25 x 51 mm) rectangular extruded aluminum tube and cast decorative scroll, welded to a cast-aluminum plate.

The mounting arm is equipped with a 4" round (102 mm) by 4" high (102 mm) tenon for luminaire mounting.

The **CRC** plate is mechanically fastened using stainless steel hardware to a central pole adaptor slip-fitting 9" (229 mm) over a 4" (102 mm) O.D. pole or tenon.

Configurations




Mid-pole Configurations

> with pole option MPL



CRFT

EPA: 1.32 sq.ft. **Weight:** 21.0 lbs. (9.5 kg)

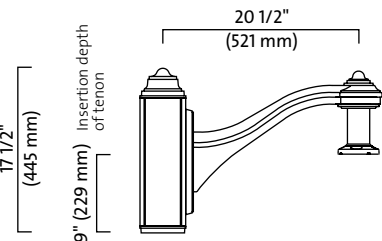


Specifications:

The **CRFT** mounting arm features a cast-aluminum curved arm mechanically assembled to a cast-aluminum plate.

The luminaire adaptor will accept a luminaire equipped with Lumec's four-bolt mounting system.

The **CRFT** plate is mechanically fastened using stainless steel hardware to a central pole adaptor slip-fitting 9" (229 mm) over a 4" (102 mm) O.D. pole or tenon.

Configurations




Mid-pole Configurations

> with pole option MPL




CRDS

EPA: 1.13 sq.ft. Weight: 19.0 lbs. (8.6 kg)

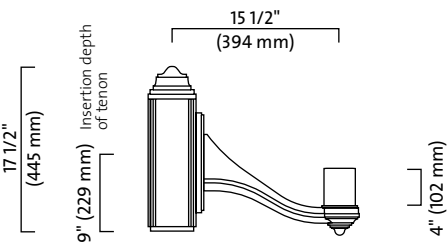


CRFS

EPA: 1.12 sq.ft. Weight: 19.0 lbs. (8.6 kg)

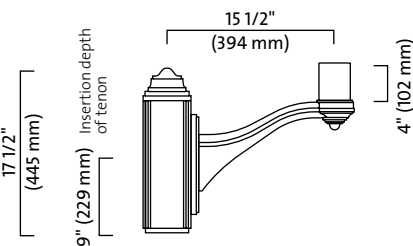


AC

EPA: 1.45 sq.ft. Weight: 15.0 lbs. (6.8 kg)

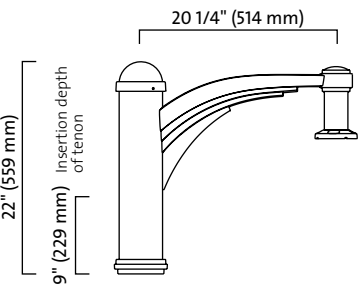

VC

EPA: 1.65 sq.ft. Weight: 16.0 lbs. (7.3 kg)

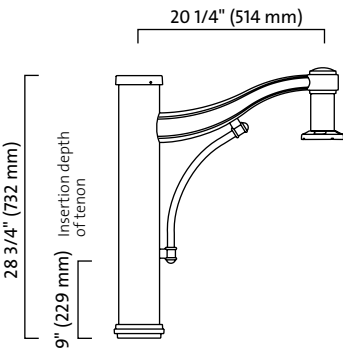

Specifications:

The **CRDS / CRFS** mounting arms feature a cast-aluminum curved arm mechanically assembled to a cast-aluminum plate.

The mounting arms are equipped with a 3" round (76 mm) by 3" high (76 mm) tenon for luminaire mounting.

The **CRDS / CRFS** plates are mechanically fastened by stainless steel hardware to a central pole adaptor slip-fitting 9" (229 mm) over a 4" (102 mm) O.D. pole or tenon.

Configurations



Mid-pole Configurations
> with pole option MPL




Specifications:

The **AC** mounting arm features a cast-aluminum curved arm, welded to the central pole adaptor.

The luminaire adaptor will accept a luminaire equipped with Lumec's four-bolt mounting system.

The central pole adaptor slip-fits 9" (229 mm) over a 4" (102 mm), 5" (127 mm) or 5 9/16" (141 mm) O.D. pole or tenon.

Configurations



Mid-pole Configurations
> with pole option MPL



Specifications:


The **VC** mounting arm features a cast-aluminum curved arm welded to the central pole adaptor.

The mounting arm includes an extruded-aluminum decorative curved tubing welded to the side of the central pole adaptor and to the arm.

The luminaire adaptor will accept a luminaire equipped with Lumec's four-bolt mounting system.

The central pole adaptor slip-fits 9" (229 mm) over a 4" (102 mm), 5" (127 mm) or 5 9/16" (141 mm) O.D. pole or tenon.

Configurations




Mid-pole Configurations
> with pole option MPL



CR

EPA: 1.11 sq.ft. **Weight:** 12.0 lbs. (5.4 kg)

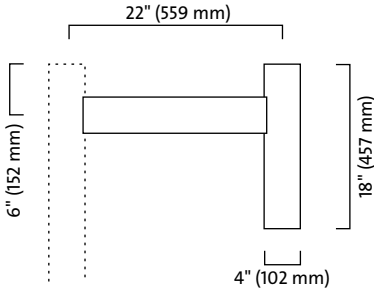


Specifications:

The **CR** mounting arm features a seamless 2" by 4" (51 by 102 mm) rectangular aluminum extrusion, mechanically assembled on both sides to the pole and to the luminaire adaptor.

The mounting arm includes a 4" (102 mm) O.D. extruded aluminum luminaire adaptor welded to the arm for luminaire mounting.


When specified with a central luminaire (configurations 3A, 4A, 4B and 5), a central pole adaptor serves to facilitate installation on site.

Configurations



JR

EPA: 1.51 sq.ft. **Weight:** 9.0 lbs. (4.1 kg)

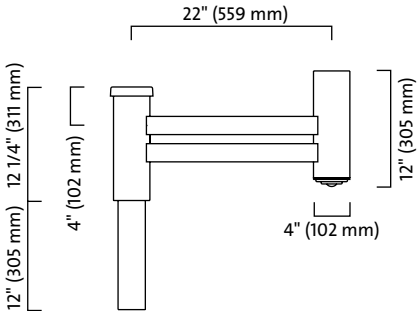


Specifications:

The **JR** mounting arm features two seamless 2" by 3" (51 by 76 mm) rectangular aluminum extrusions, welded on both sides to the central pole adaptor and to the luminaire adaptor.

The mounting arm includes a 4" (102 mm) O.D. extruded aluminum luminaire adaptor welded to the arm for luminaire mounting.


> For pole supplied by others, we strongly recommend the OV option.

Configurations




PC

EPA: 2.35 sq.ft. Weight: 20.0 lbs. (9.1 kg)

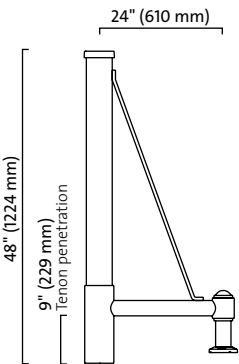


CN1

EPA: 2.62 sq.ft. Weight: 23.0 lbs. (10.4 kg)

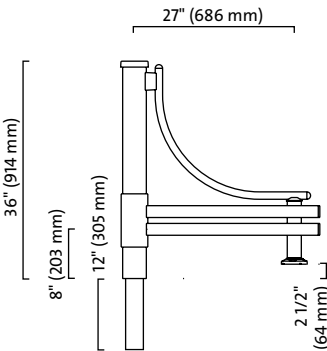


CN1S

EPA: 2.58 sq.ft. Weight: 20.0 lbs. (9.1 kg)

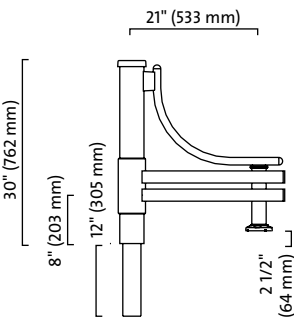

OM

EPA: 1.84 sq.ft. Weight: 12.0 lbs. (5.4 kg)

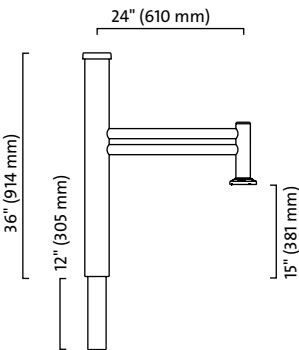

Specifications:


The **PC** mounting arm features a 2 3/8" (60 mm) round extruded-aluminum arm welded to the central pole adaptor.

The mounting arm includes an extruded-aluminum decorative rod welded to the central pole adaptor and to the arm.

The luminaire adaptor will accept a luminaire equipped with Lumec's four-bolt mounting system.

The aluminum central pole adaptor slip-fits 9" (229 mm) over a 4" (102 mm), 5" (127 mm) or 5 9/16" (141 mm) O.D. pole or tenon.

Configurations



Mid-pole Configurations

> with pole option MPL



Specifications:

The **CN1** mounting arm features two 2" by 3" (51 x 76 mm) rectangular extruded-aluminum arms welded to the central pole adaptor.


The mounting arm includes a cast-aluminum decorative curved section welded to the central pole adaptor and the arm.

The luminaire adaptor will accept a luminaire equipped with Lumec's four-bolt mounting system.

The central pole adaptor slip-fits 12" (305 mm) into a 4" (102 mm), 5" (127 mm) or 5 9/16" (141 mm) O.D. pole or tenon.

> The **CN1** is available with the **OV** option that can accommodate up to two 175W ballasts.
> For pole supplied by others, we strongly recommend the **OV** option.

Configurations



Specifications:

The **CN1S** mounting arm features two 2" by 3" (51 x 76 mm) rectangular extruded-aluminum arms welded to the central pole adaptor.


The mounting arm includes a cast-aluminum decorative curved section welded to the central pole adaptor and the arm.

The luminaire adaptor will accept a luminaire equipped with Lumec's four-bolt mounting system.

The central pole adaptor slip-fits 12" (305 mm) into a 4" (102 mm), 5" (127 mm) or 5 9/16" (141 mm) O.D. pole or tenon.

> The **CN1S** is available with the **OV** option that can accommodate up to one 175W ballasts.
> For pole supplied by others, we strongly recommend the **OV** option.

Configurations



Specifications:


The **OM** mounting arm features two straight 1 5/8" O.D. (41 mm) arms welded to the central pole adaptor and an extruded-aluminum luminaire adaptor.

The luminaire adaptor will accept a luminaire equipped with Lumec's four-bolt mounting system.

The central pole adaptor slip-fits 12" (305 mm) into a 4" (102 mm), 5" (127 mm) or 5 9/16" (141 mm) O.D. pole or tenon.


> The **OM** is available with the **OV** option that can accommodate up to two 175W ballasts.
> For pole supplied by others, we strongly recommend the **OV** option.

Configurations




PM

EPA: 2.53 sq.ft. **Weight:** 18.0 lbs. (8.2 kg)

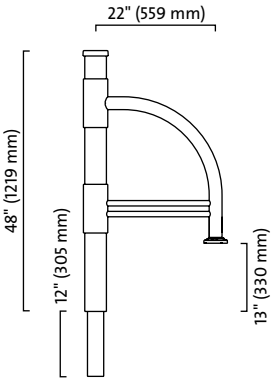


CN3

EPA: 2.63 sq.ft. **Weight:** 26.0 lbs. (11.8 kg)

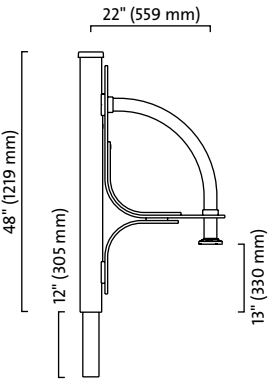

CNB-M

EPA: 0.38 sq.ft. **Weight:** 5.0 lbs. (2.03 kg)

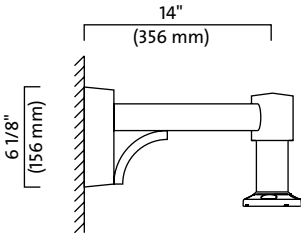








Specifications:

The **PM** mounting arm features a 2 3/8" O.D. (60 mm) extruded-aluminum tubing bent at a 90° angle and welded to two 1" (25 mm) extruded-aluminum arms, two decorative rings.

The luminaire adaptor will accept a luminaire equipped with Lumec's four-bolt mounting system.

The central pole adaptor slip-fits 12" (305 mm) into a 4" (102 mm), 5" (127 mm) or 5 9/16" (141 mm) O.D. pole or tenon.

> The *PM* is available with the *OV* option that can accommodate up to two 175W ballasts.
> For pole supplied by others, we strongly recommend the *OV* option.

Configurations       
1A 2 2A 3 3B 4 M








Specifications:

The **CN3** mounting arm features a 2 3/8" O.D. (60 mm) extruded-aluminum tubing bent at a 90° angle welded to the central pole adaptor and to a cast-aluminum curved decorative flat band arm.

The luminaire adaptor will accept a luminaire equipped with Lumec's four-bolt mounting system.

The central pole adaptor slip-fits 12" (305 mm) into a 4" (102 mm), 5" (127 mm) or 5 9/16" (141 mm) O.D. pole or tenon.


> The *CN3* is available with the *OV* option that can accommodate up to two 175W ballasts.
> For pole supplied by others, we strongly recommend the *OV* option.

Configurations       
1A 2 2A 3 3B 4 M

Specifications:


The **CRC** mounting arm features a 2" by 3" (51 by 76 mm) rectangular extruded-aluminum arm welded to a cast-aluminum wall-mounted housing.

The luminaire adaptor will accept a luminaire equipped with Lumec's four-bolt mounting system.

Configurations 
M

MM

EPA: 2.32 sq.ft. Weight: 22.0 lbs. (10.0 kg)

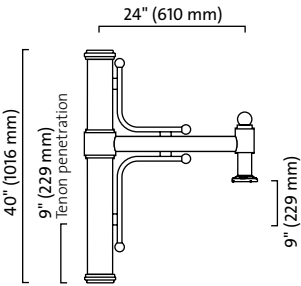

Specifications:








The MM mounting arm features a 2 3/8" round (60 mm) extruded-aluminum arm welded to an aluminum central pole adaptor.

The mounting arm includes two decorative cast-aluminum bent rods.

The luminaire adaptor will accept a luminaire equipped with Lumec's four-bolt mounting system.

The aluminum central pole adaptor slip-fits 9" (229 mm) over a 4" (102 mm), 5" (127 mm) or 5 9/16" (141 mm) O.D. pole or tenon.


Configurations



1A 2 2A 3 3B 4 M

MR

EPA: 2.10 sq.ft. Weight: 20.0 lbs. (9.1 kg)

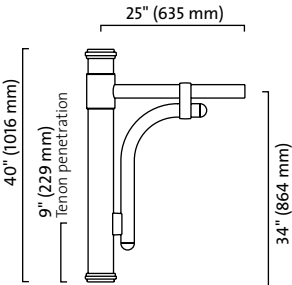








Specifications:

The MR mounting arm features a 2 3/8" round (60 mm) extruded-aluminum arm welded to an aluminum central pole adaptor.

The mounting includes a decorative bent extruded-aluminum tube welded to the central pole adaptor and to the arm.

The cast-aluminum central pole adaptor slip-fits 9" (229 mm) over a 4" (102 mm), 5" (127 mm) or 5 9/16" (141 mm) O.D. pole or tenon.


Configurations



1A 2 2A 3 3B 4 M

MT

EPA: 2.20 sq.ft. Weight: 21.0 lbs. (9.5 kg)

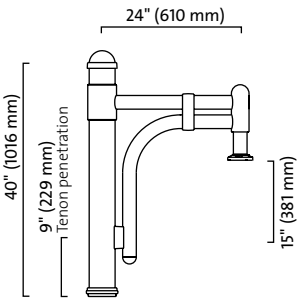

Specifications:








The MT mounting arm features a 2 3/8" round (60 mm) extruded-aluminum arm welded to an aluminum central pole adaptor.

The mounting arm includes a decorative bent extruded-aluminum tube welded to the central pole adaptor and to the luminaire adaptor.

The luminaire adaptor will accept a luminaire equipped with Lumec's four-bolt mounting system.

The aluminum central pole adaptor slip-fits 9" (229 mm) over a 4" (102 mm), 5" (127 mm) or 5 9/16" (141 mm) O.D. pole or tenon.


Configurations



1A 2 2A 3 3B 4 M

UM

EPA: 2.33 sq.ft. Weight: 16.0 lbs. (7.3 kg)

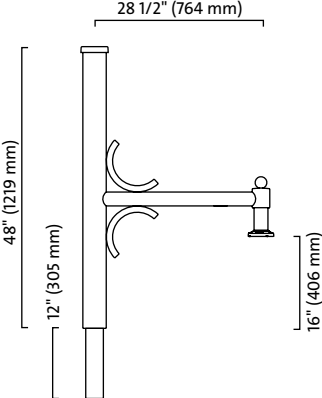

Specifications:

The UM mounting arm features a 2 3/8" round (60 mm) extruded-aluminum arm welded to an aluminum central pole adaptor.








The mounting arm includes two cast-aluminum decorative elements welded to the central pole adaptor and to the arm.

The luminaire adaptor will accept a luminaire equipped with Lumec's four-bolt mounting system.

The central pole adaptor slip-fits 12" (305 mm) into a 4" (102 mm), 5" (127 mm) or 5 9/16" (141 mm) O.D. pole or tenon.

> The UM is available with the OV option that can accommodate up to two 175W ballasts.
> For pole supplied by others, we strongly recommend the OV option.


Configurations



1A 2 2A 3 3B 4 M


CRG

EPA: 2.29 sq.ft. **Weight:** 15.0 lbs. (6.8 kg)

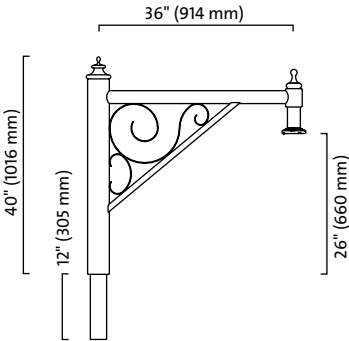


CRH

EPA: 1.95 sq.ft. **Weight:** 24.0 lbs. (10.9 kg)

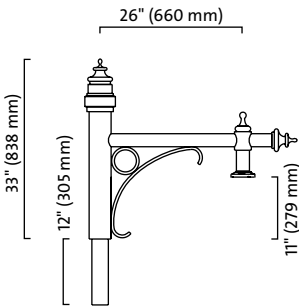

CRI

CRI mounting can integrate up to 2 ballasts of 175W.
EPA: 2.68 sq.ft. **Weight:** 40.0 lbs. (18.1 kg)

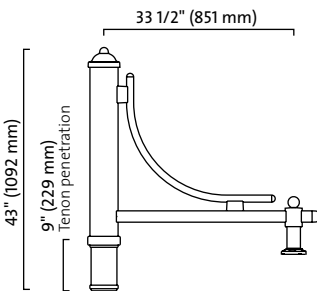

Specifications:

The **CRG** mounting arm features one 2 3/8" round (60 mm) extruded-aluminum arm welded to the central pole adaptor.








A 1 1/8" square (29 mm) extruded-aluminum tube is welded at an angle to the central pole adaptor and to the arm.

The mounting arm includes two decorative rolled sections of a flat aluminum band welded between the arm, central pole adaptor and angled tube.

The luminaire adaptor will accept a luminaire equipped with Lumec's four-bolt mounting system.

The central pole adaptor slip-fits 12" (305 mm) into a 4" (102 mm), 5" (127 mm) or 5 9/16" (141 mm) O.D. pole or tenon.

> The **CRG** is available with the **OV** option that can accommodate up to two 175W ballasts.
> For pole supplied by others, we strongly recommend the **OV** option.

Configurations       
1A 2 2A 3 3B 4 M








Specifications:

The **CRH** mounting arm features one 2 3/8" round (60 mm) extruded-aluminum arm welded to the central pole adaptor. Both are closed by a decorative cast-aluminum cover.

The mounting arm includes two decorative rolled sections of aluminum rods welded between the arm and the central pole adaptor.

The luminaire adaptor will accept a luminaire equipped with Lumec's four-bolt mounting system.

The central pole adaptor slip-fits 12" (305 mm) into a 4" (102 mm), 5" (127 mm) or 5 9/16" (141 mm) O.D. pole or tenon.

Configurations       
1A 2 2A 3 3B 4 M








Specifications:

The **CRI** mounting arm features one 2" by 2" (51 x 51 mm) square extruded-aluminum arm welded to the central pole adaptor and closed by a cast-aluminum cover.

The mounting arm includes a 1 1/4" O.D. (32 mm) cast-aluminum decorative curved section welded to both the central pole adaptor and the arm.


The luminaire adaptor will accept a luminaire equipped with Lumec's four-bolt mounting system.

The aluminum central pole adaptor slip-fits 9" (229 mm) over a 4" (102 mm), 5" (127 mm) or 5 9/16" (141 mm) O.D. pole or tenon.

Configurations       
1A 2 2A 3 3B 4 M


CN5

EPA: 1.81 sq.ft. Weight: 11.0 lbs. (5.0 kg)

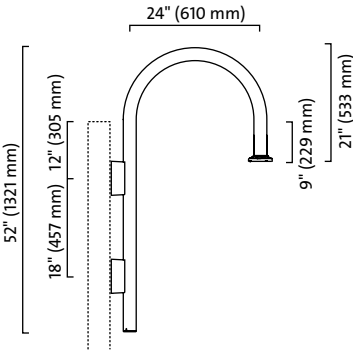


IF

EPA: 1.41 sq.ft. Weight: 9.0 lbs. (4.0 kg)

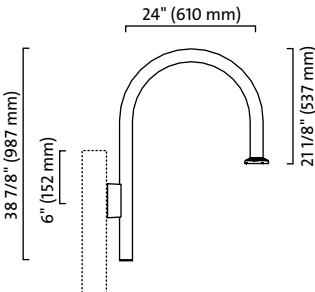


SM

EPA: 1.37 sq.ft. Weight: 13.0 lbs. (5.9 kg)

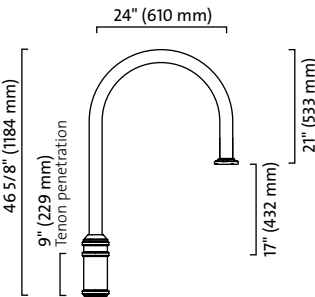

MJ

EPA: 2.00 sq.ft. Weight: 13.0 lbs. (5.9 kg)

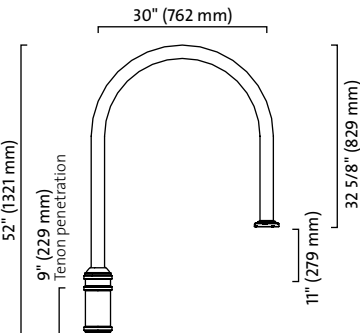

Specifications:

The **CN5** mounting arm features a 2 3/8"-O.D. (60 mm) extruded-aluminum tube bent at a 180° angle and mechanically assembled to the side of the pole using two cast-aluminum mounting arm adaptors.

The luminaire adaptor will accept a luminaire equipped with Lumec's four-bolt mounting system.

Configurations

1A	2	2A	3	3B	4	M

Specifications:

The **IF** mounting arm features a 2 3/8"-O.D. (60 mm) extruded-aluminum tube bent at a 180° angle and mechanically assembled to the pole using a cast-aluminum mounting adaptor.

The luminaire adaptor will accept a luminaire equipped with Lumec's four-bolt mounting system.

Configurations

1A	2	2A	3	3B	4	M

Specifications:

The **SM** mounting arm features a 2 3/8"-O.D. (60 mm) extruded-aluminum tube bent at a 180° angle welded to a cast-aluminum pole-top adaptor.

The luminaire adaptor will accept a luminaire equipped with Lumec's four-bolt mounting system.

The aluminum central pole adaptor slip-fits 9" (229 mm) over a 4" (102 mm), 5" (127 mm) or 5 9/16" (141 mm) O.D. pole or tenon.

Configurations

1A	2

Specifications:

The **MJ** mounting arm features a 2 3/8"-O.D. (60 mm) extruded-aluminum tube bent at a 180° angle welded to a cast-aluminum pole-top adaptor.

The luminaire adaptor will accept a luminaire equipped with Lumec's four-bolt mounting system.

The aluminum central pole adaptor slip-fits 9" (229 mm) over a 4" (102 mm), 5" (127 mm) or 5 9/16" (141 mm) O.D. pole or tenon.


> The MJ bracket is offered with LG option (medaillon to accept logo) see page 134.

Configurations

1A	2	M

BM

EPA: 2.00 sq.ft. **Weight:** 40.0 lbs. (18.1 kg)

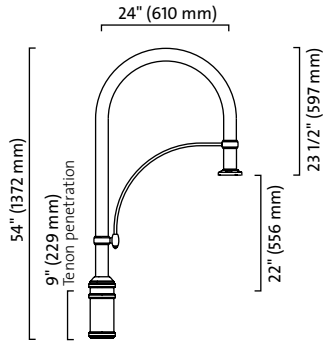

Specifications:

The **BM** mounting arm features a 2 3/8" O.D. (60 mm) extruded-aluminum tube bent at 180° welded to a cast-aluminum adaptor.

The mounting arm includes an aluminum decorative element welded to the arm.


The luminaire adaptor will accept a luminaire equipped with Lumec's four-bolt mounting system.

The aluminum central pole adaptor slip-fits 9" (229 mm) over a 4" (102 mm), 5" (127 mm) or 5 9/16" (141 mm) O.D. pole or tenon.

Configurations
1A 2 M

LM

EPA: 2.59 sq.ft. **Weight:** 21.0 lbs. (9.5 kg)

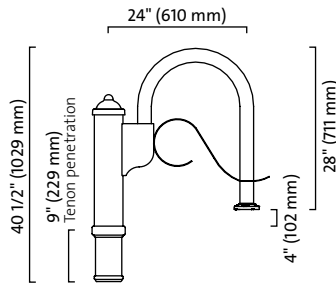

Specifications:

The **LM** mounting arm features a 2 3/8" O.D. (60 mm) extruded-aluminum tube bent at 180° welded to a cast-aluminum adaptor.

The mounting arm includes a flat rolled aluminum decorative element.


The luminaire adaptor will accept a luminaire equipped with Lumec's four-bolt mounting system.

The aluminum central pole adaptor slip-fits 9" (229 mm) over a 4" (102 mm), 5" (127 mm) or 5 9/16" (141 mm) O.D. pole or tenon.

Configurations
1A 2 2A 3 3B 4 M

TM

EPA: 2.27 sq.ft. **Weight:** 20.0 lbs. (9.1 kg)

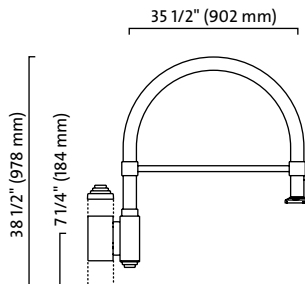

Specifications:

The **TM** mounting arm features a 2 3/8" O.D. (60 mm) extruded-aluminum tube bent at 180° and welded to a pole adaptor.

The mounting arm includes an extruded-aluminum 1 1/16" (27 mm) O.D. decorative element welded to the arm.


The luminaire adaptor will accept a luminaire equipped with Lumec's four-bolt mounting system.

The aluminum central pole adaptor slip-fits over a 4" (102 mm), 5" (127 mm) or 5 9/16" (141 mm) O.D. pole.

Configurations
1A 2 3 3B 4 M

NM

EPA: 2.81 sq.ft. **Weight:** 27 lbs. (12.3 kg)

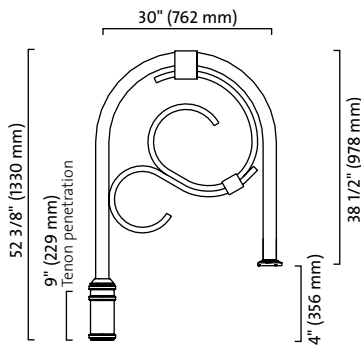

Specifications:

The **NM** mounting arm features a 2 3/8" O.D. (60 mm) extruded-aluminum tube bent at 180°, welded to a cast-aluminum pole adaptor.

The mounting arm includes a cast-aluminum decorative spiral element welded to the arm.

The luminaire adaptor will accept a luminaire equipped with Lumec's four-bolt mounting system.


The aluminum central pole adaptor slip-fits 9" (229 mm) over a 4" (102 mm), 5" (127 mm) or 5 9/16" (141 mm) O.D. pole or tenon.

Configurations
1A 2 M

M10 / M30 / M50 > CLAMP-ON BRACKETS

M10

EPA: 1.03 sq.ft. Weight: 9.0 lbs. (4.1 kg)

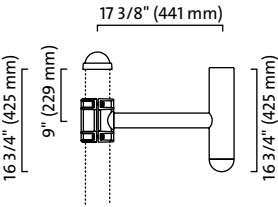

Specifications:

The **M10** mounting arm features a 2 3/8" round (60 mm), extruded-aluminum tube, welded to a cast-aluminum clamp-on pole adaptor. Comes with a standard decorative pole cap.

The mounting arm includes a 4" (102 mm) O.D. extruded aluminum luminaire adaptor welded to the arm for luminaire mounting.


The mounting arm clamp is mechanically assembled on a 4" (102 mm), 5" (127 mm) or 5 9/16" (141 mm) pole using stainless steel hardware. The location is pre-drilled on Lumec poles.

Configurations

Optional Pole Caps

M30

EPA: 1.56 sq.ft. Weight: 12.0 lbs. (5.4 kg)

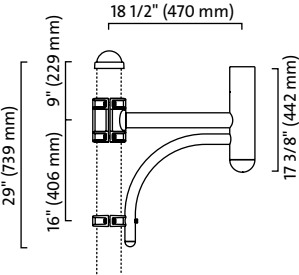

Specifications:

The **M30** mounting arm features a 2 3/8" round (60 mm), extruded-aluminum tube, welded to a cast-aluminum clamp-on pole adaptor. Comes with a standard decorative pole cap.

The mounting arm includes a decorative curved 1.66" round (42 mm) extruded bent aluminum piece is mechanically secured to the pole using a clamp and welded to the luminaire adaptor.

The mounting arm includes a 4" (102 mm) O.D. extruded aluminum luminaire adaptor welded to the arm for luminaire mounting.


The mounting arm clamp is mechanically assembled on a 4" (102 mm), 5" (127 mm) or 5 9/16" (141 mm) pole using stainless steel hardware. The location is pre-drilled on Lumec poles.

Configurations

Optional Pole Caps

M50

EPA: 1.19 sq.ft. Weight: 14.0 lbs. (6.4 kg)

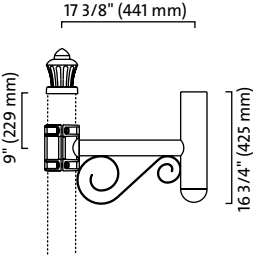

Specifications:

The **M50** mounting arm features a 2 3/8" round (60 mm), extruded-aluminum tube, welded to a cast-aluminum clamp-on pole adaptor. Comes with a standard decorative pole cap.


The mounting arm includes a decorative rolled flat aluminum decorative element, welded to the arm, luminaire adaptor and pole adaptor.

The mounting arm includes a 4" (102 mm) O.D. extruded aluminum luminaire adaptor welded to the arm for luminaire mounting.

The mounting arm clamp is mechanically assembled on a 4" (102 mm), 5" (127 mm) or 5 9/16" (141 mm) pole using stainless steel hardware. The location is pre-drilled on Lumec poles.

Configurations

Optional Pole Caps

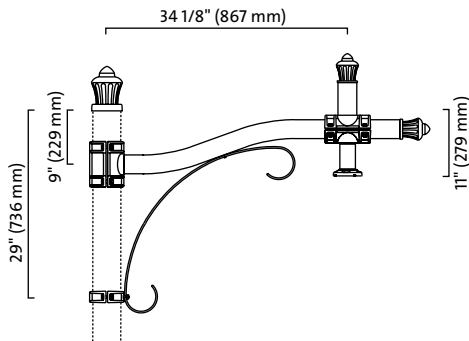M20A**EPA:** 2.06 sq.ft. **Weight:** 28.0 lbs. (12.7 kg)**Specifications:**

The **M20A** mounting arm features a 2 7/8" round (73 mm) double-bend extruded-aluminum tube, welded to a cast-aluminum clamp-on pole adaptor. Comes with a standard decorative pole cap.

The mounting arm includes a flat bent aluminum decorative element mechanically secured to the arm and pole.


A suspended luminaire adaptor is mechanically secured to the arm by a decorative cast-aluminum clamp and stainless steel hardware.

The luminaire adaptor will accept a luminaire equipped with Lumec's four-bolt mounting system.

The mounting arm clamp is mechanically assembled on a 4" (102 mm), 5" (127 mm) or 5 9/16" (141 mm) pole using stainless steel hardware. The location is pre-drilled on Lumec poles.

Configurations

Optional Pole Caps

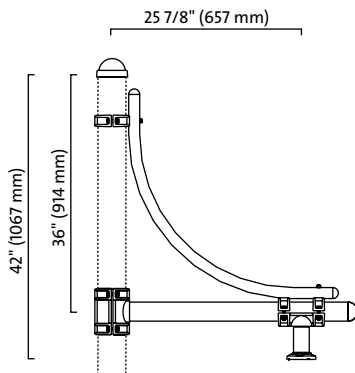M20G**EPA:** 1.76 sq.ft. **Weight:** 18.0 lbs. (8.2 kg)**Specifications:**

The **M20G** mounting arm features a 2 7/8" round (73 mm), straight extruded-aluminum tube, welded to a cast-aluminum clamp-on pole adaptor. Comes with a standard decorative pole cap.

The mounting arm includes a bent extruded-aluminum decorative element mechanically secured to the arm and pole.


A suspended luminaire adaptor is mechanically secured to the arm by a decorative cast-aluminum clamp and stainless steel hardware.

The luminaire adaptor will accept a luminaire equipped with Lumec's four-bolt mounting system.

The mounting arm clamp is mechanically assembled on a 4" (102 mm), 5" (127 mm) or 5 9/16" (141 mm) pole using stainless steel hardware. The location is pre-drilled on Lumec poles.

Configurations

Optional Pole Caps

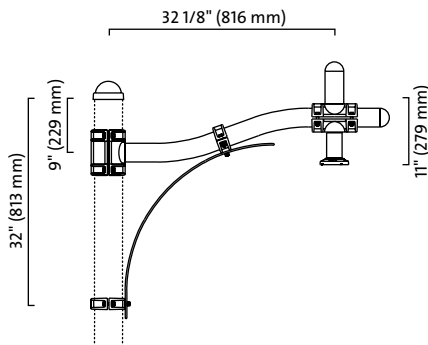M20H**EPA:** 1.76 sq.ft. **Weight:** 19.0 lbs. (8.6 kg)**Specifications:**

The **M20H** mounting arm features a 2 7/8" round (73 mm) double-bend extruded-aluminum tube, welded to a cast-aluminum clamp-on pole adaptor. Comes with a standard decorative pole cap.

The mounting arm includes a flat bent aluminum decorative element mechanically secured to the arm and pole.


A suspended luminaire adaptor is mechanically secured to the arm by a decorative cast-aluminum clamp and stainless steel hardware.

The luminaire adaptor will accept a luminaire equipped with Lumec's four-bolt mounting system.

The mounting arm clamp is mechanically assembled on a 4" (102 mm), 5" (127 mm) or 5 9/16" (141 mm) pole using stainless steel hardware. The location is pre-drilled on Lumec poles.

Configurations

Optional Pole Caps

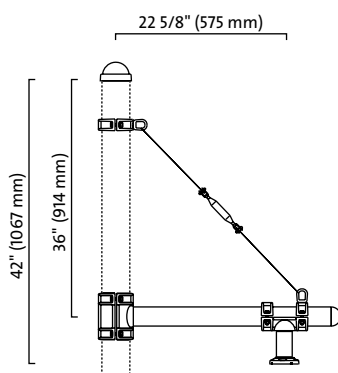M20M**EPA:** 1.34 sq.ft. **Weight:** 19.0 lbs. (8.6 kg)**Specifications:**

The **M20M** mounting arm features a 2 7/8" round (73 mm), straight extruded-aluminum tube, welded to a cast-aluminum clamp-on pole adaptor. Comes with a standard decorative pole cap.

The mounting arm includes a steel cable decorative element mechanically secured to the arm and pole.

A suspended luminaire adaptor is mechanically secured to the arm by a decorative cast-aluminum clamp and stainless steel hardware.

The luminaire adaptor will accept a luminaire equipped with Lumec's four-bolt mounting system.


The mounting arm clamp is mechanically assembled on a 4" (102 mm), 5" (127 mm) or 5 9/16" (141 mm) pole using stainless steel hardware. The location is pre-drilled on Lumec poles.

Configurations

Optional Pole Caps

SN

EPA: 1.51 sq.ft. Weight: 16.0 lbs. (7.3 kg)





Specifications:


The **SN** mounting arm features an extruded-aluminum arm, welded to a cast-aluminum clamp-on pole adaptor and luminaire adaptor. Comes with a standard decorative pole cap.

The mounting arm clamp is mechanically assembled on a 4" (102 mm), 5" (127 mm) or 5 9/16" (141 mm) pole using stainless steel hardware. The location is pre-drilled on Lumec poles.


Configurations








Optional Pole Caps






1A2M

CAP1CAP2

TN

EPA: 1.87 sq.ft. Weight: 19.0 lbs. (8.6 kg)

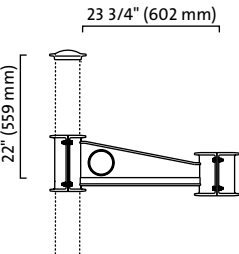



Specifications:


The **TN** mounting arm features a decorative cast-aluminum arm, with straight edge and a decorative hole, welded to a cast-aluminum clamp-on pole adaptor and luminaire adaptor. Comes with a standard decorative pole cap.

The mounting arm clamp is mechanically assembled on a 4" (102 mm), 5" (127 mm) or 5 9/16" (141 mm) pole using stainless steel hardware. The location is pre-drilled on Lumec poles.


Configurations








Optional Pole Caps






1A2M

CAP1CAP2

UN

EPA: 1.68 sq.ft. Weight: 17.0 lbs. (7.7 kg)

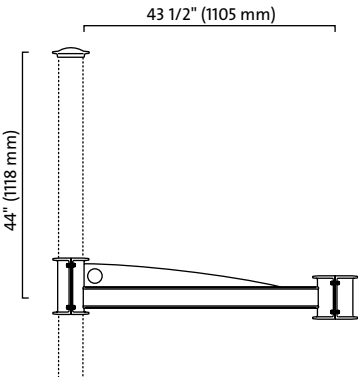


Specifications:


The **UN** mounting arm features an extruded-aluminum arm, welded to a cast-aluminum clamp-on pole adaptor and luminaire adaptor. Comes with a standard decorative pole cap.


The mounting arm includes a decorative aluminum piece, with a straight edge on the bottom and a decorative hole that is mechanically secured to the arm and luminaire adaptor.

The mounting arm clamp is mechanically assembled on a 4" (102 mm), 5" (127 mm) or 5 9/16" (141 mm) pole using stainless steel hardware. The location is pre-drilled on Lumec poles.


Configurations








Optional Pole Caps






1A2M

CAP1CAP2


CJL4

EPA: 4.10 sq.ft. **Weight:** 36.0 lbs. (16.3 kg)

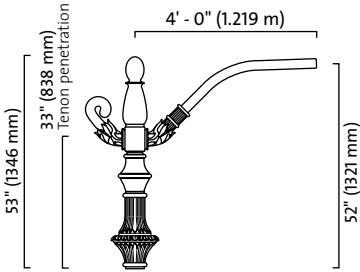


CJL5.5

EPA: 4.40 sq.ft. **Weight:** 41.0 lbs. (18.6 kg)

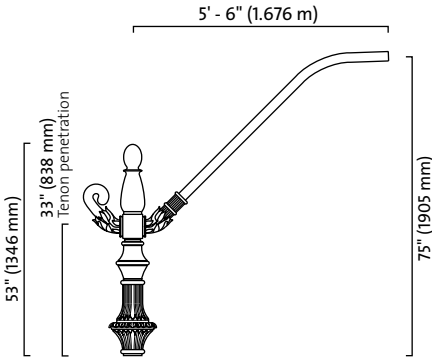


CJL6

EPA: 4.51 sq.ft. **Weight:** 43.0 lbs. (19.5 kg)

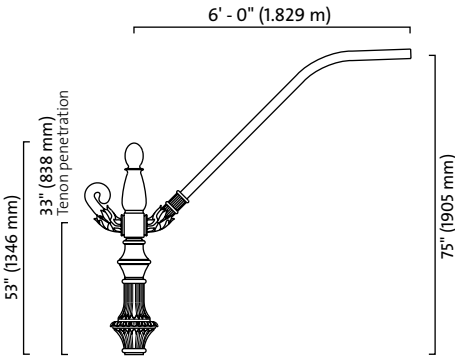

CJL8

EPA: 4.95 sq.ft. **Weight:** 50.0 lbs. (22.7 kg)

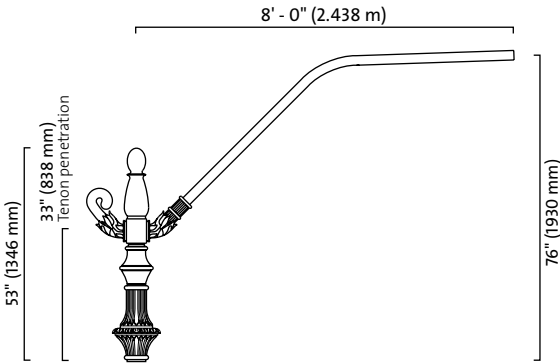

Specifications:

The **CJL4 / CJL5.5 / CJL6 / CJL8** mounting arms feature a 2 3/8" O.D. (60 mm) double bent steel tube welded to a steel adaptor.

The mounting arms assemblies include cast-aluminum decorative elements. The pole-top adaptor slip-fits over a two-step tenon 2 7/8" (73 mm) O.D. (top section) and 4" (120 mm) O.D. (bottom section), 30" (762 mm) tall.

Configurations




1A 2

4


CRM4

EPA: 3.00 sq.ft. Weight: 31.0 lbs. (14.1 kg)

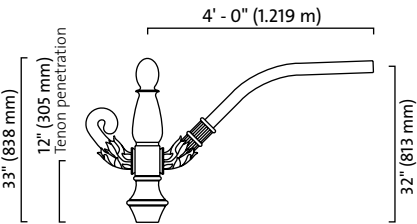


CRM6

EPA: 3.33 sq.ft. Weight: 37.0 lbs. (16.8 kg)

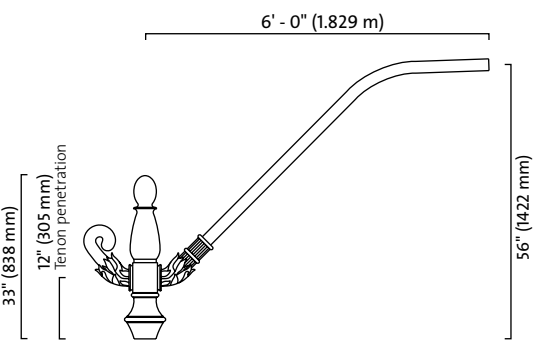

CRM8

EPA: 3.73 sq.ft. Weight: 42.0 lbs. (19.1 kg)

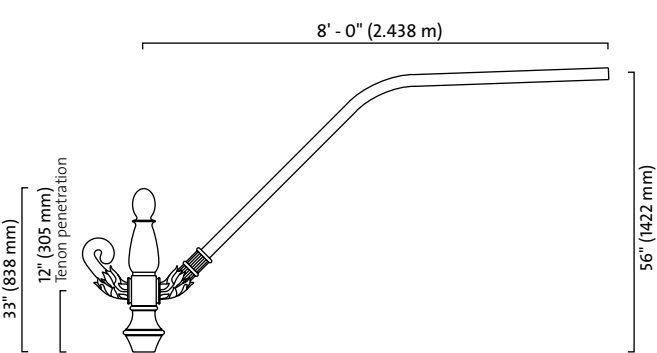

Specifications:

The CRM4 / CRM6 / CRM8 mounting arms feature a 2 3/8" O.D. (60 mm) double-bend steel tube welded to a steel adaptor.

The mounting arms assemblies include cast-aluminum decorative elements. The pole-top adaptor slip-fits 10 3/8" (264 mm) over a 2 7/8" (73 mm) O.D. tenon.

Configurations




1A 2

4


DC6

EPA: 4.07 sq.ft. **Weight:** 32.0 lbs. (14.5 kg)

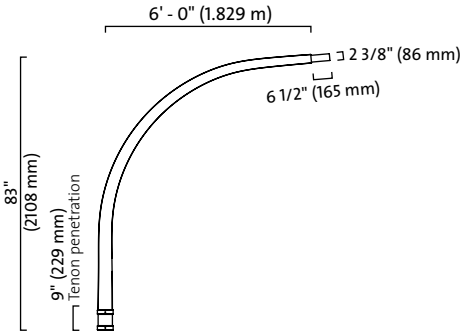


DC8

EPA: 5.00 sq.ft. **Weight:** 43.0 lbs. (19.5 kg)

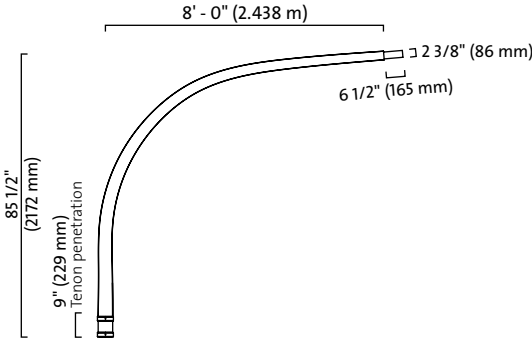


DR6

EPA: 4.07 sq.ft. **Weight:** 32.0 lbs. (14.5 kg)

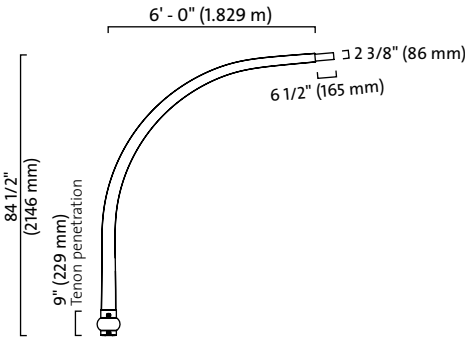

DR8

EPA: 5.00 sq.ft. **Weight:** 43.0 lbs. (19.5 kg)

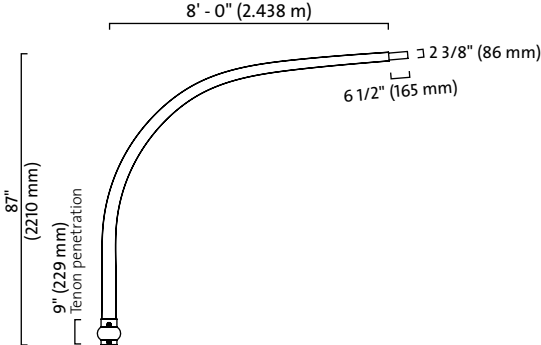

Specifications:

The **DC6 / DC8 / DR6 / DR8** mounting arms feature a round and smooth tapered aluminum bent arm welded to cast-aluminum pole adaptor.
The central pole adaptor slip-fits 9" (229 mm) over a 4" (102 mm), 5" (127 mm) or 5 9/16" (141 mm) O.D. pole or tenon.

Configurations




4

AC4 / AC6 / AC8 > EXTENDED REACH BRACKETS


AC4

EPA: 2.34 sq.ft. Weight: 20.0 lbs. (9.1 kg)

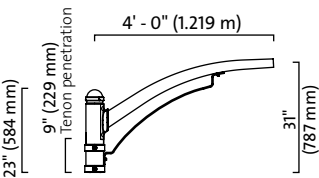


AC6

EPA: 3.06 sq.ft. Weight: 23.0 lbs. (10.4 kg)

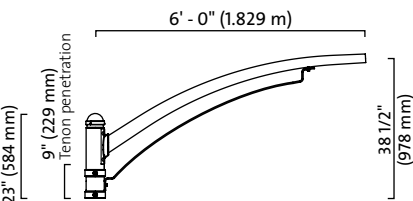

AC8

EPA: 3.77 sq.ft. Weight: 32.0 lbs. (14.5 kg)

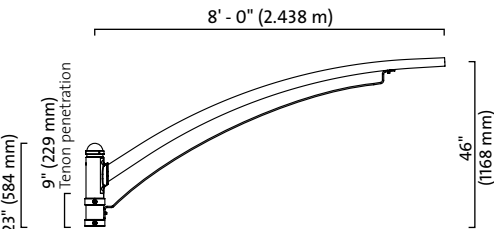

Specifications:

The **AC4 / AC6 / AC8** mounting arms feature a tapered spun aluminum arm of 4" by 2 7/8" (102 by 73 mm) to 2 3/8" (60 mm) O.D. at the luminaire end, mechanically assembled to the central housing.

The mounting arms include a decorative curved flat piece of aluminum, mechanically assembled to the central pole adaptor and to the arm using stainless steel hardware.


The central pole adaptor is complete with a cast-aluminum cap, slip-fits 9" (229 mm) over a 4" (102 mm), 5" (127 mm) or 5 9/16" (141 mm) O.D. pole or tenon.

Configurations


1A	2	4
----	---	---

AR4


EPA: 3.63 sq.ft. **Weight:** 31.0 lbs. (14.1 kg)

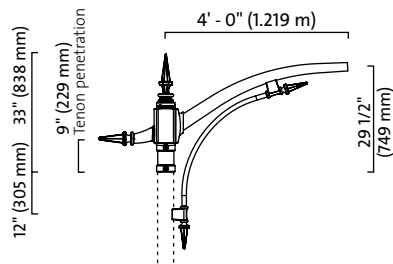AR6

EPA: 4.49 sq.ft. **Weight:** 34.0 lbs. (15.4 kg)

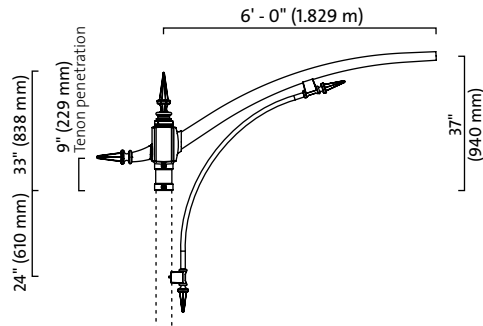AR8

EPA: 5.36 sq.ft. Weight: 43.0 lbs. (19.5kg)

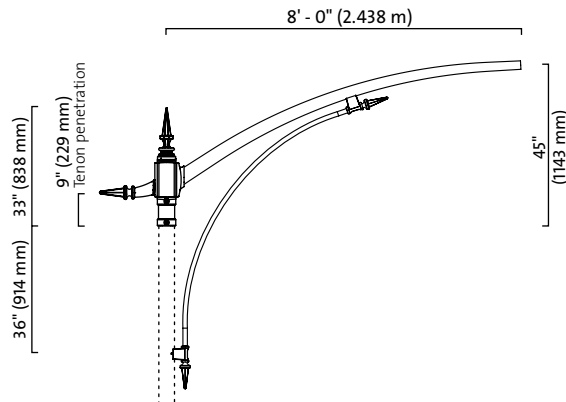

Specifications:

The **AR4 / AR6 / AR8** mounting arms a tapered spun aluminum arm of 4" by 2 7/8" (102 by 73 mm) to 2 3/8" (60 mm) O.D. at the luminaire end, mechanically assembled to the central housing.

The mounting arms include a decorative bent piece of aluminum, mechanically assembled to the pole and to the arm using stainless steel hardware, complete with a decorative cast aluminum cap on each end.

The central pole adaptor is complete with a decorative cast-aluminum cap. With the IA configuration a cast-aluminum decorative side cap is added. The central pole adaptor slip-fits 9" (229 mm) over a 4" (102 mm), 5" (127 mm) or 5 9/16" (141 mm) O.D. pole or tenon.

Configurations




1A 2

4


YC4

EPA: 2.36 sq.ft. Weight: 25.0 lbs. (11.3 kg)

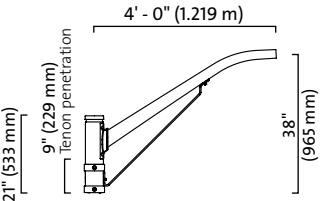


YC6

EPA: 3.10 sq.ft. Weight: 30.0 lbs. (13.6 kg)

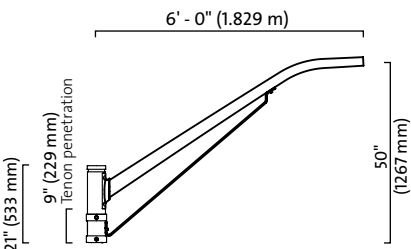

YC8

EPA: 3.76 sq.ft. Weight: 38.0 lbs. (17.2 kg)

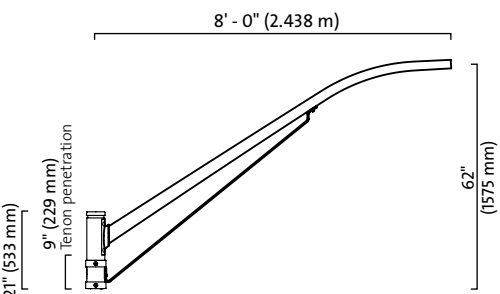

Specifications:

The YC4 / YC6 / YC8 mounting arms feature a tapered spun aluminum arm of 4" by 2 7/8" (102 by 73 mm) to 2 3/8" (60 mm) O.D. at the luminaire end, mechanically assembled to the central housing.

The mounting arms include a decorative bent piece of aluminum, mechanically assembled to the central pole adaptor and to the arm using stainless steel hardware.

The central pole adaptor is complete with a cast-aluminum cap, slip-fits 9" (229 mm) over a 4" (102 mm), 5" (127 mm) or 5 9/16" (141 mm) O.D. pole or tenon.


Configurations



4


YR4

EPA: 2.69 sq.ft. **Weight:** 29.0 lbs. (13.2 kg)

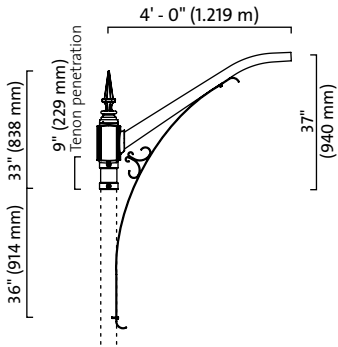


YR6

EPA: 3.43 sq.ft. **Weight:** 34.0 lbs. (15.4 kg)

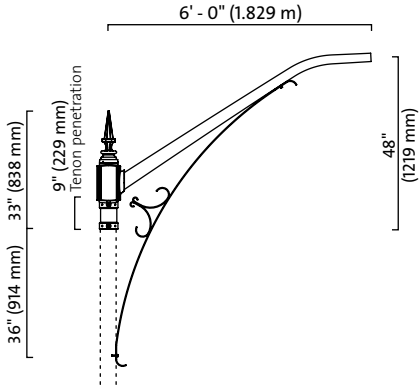

YR8

EPA: 4.07 sq.ft. **Weight:** 43.0 lbs. (17.2 kg)

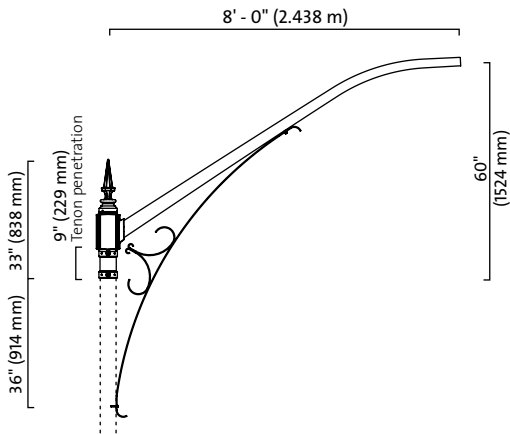

Specifications:

The **YR4 / YR6 / YR8** mounting arms feature a tapered spun aluminum arm of 4" by 2 7/8" (102 by 73 mm) to 2 3/8" (60 mm) O.D. at the luminaire end, mechanically assembled to the central housing.

The mounting arms include a decorative bent piece of aluminum, mechanically assembled to the pole and to the arm using stainless steel hardware.

The central pole adaptor is complete with a decorative cast-aluminum cap, slip-fits 9" (229 mm) over a 4" (102 mm), 5" (127 mm) or 5 9/16" (141 mm) O.D. pole or tenon.

Configurations




1A 2

4

VC4 / VC6 / VC8 > EXTENDED REACH BRACKETS


VC4

EPA: 3.12 sq.ft. Weight: 24.0 lbs. (10.9 kg)

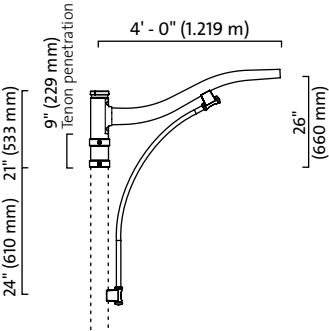


VC6

EPA: 4.06 sq.ft. Weight: 28.0 lbs. (12.7 kg)

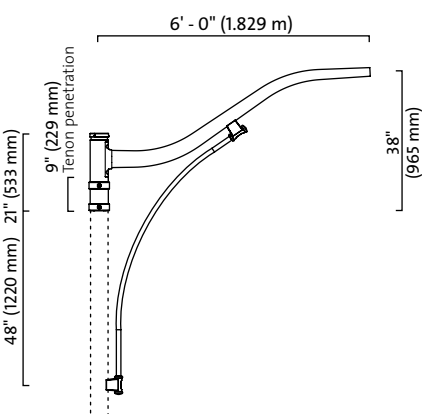

VC8

EPA: 5.02 sq.ft. Weight: 37.0 lbs. (16.8 kg)

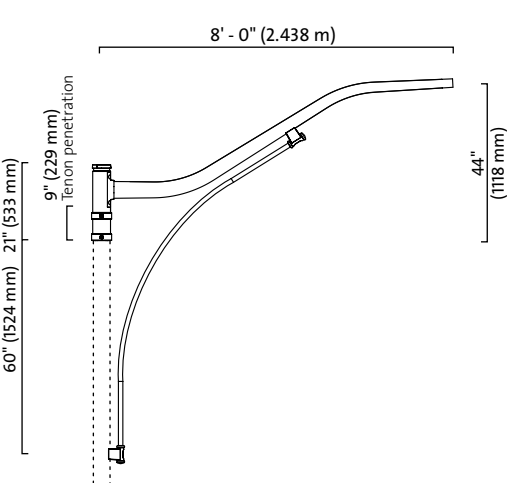

Specifications:

The VC4 / VC6 / VC8 mounting arms feature a tapered spun aluminum arm of 4" by 2 7/8" (102 by 73 mm) to 2 3/8" (60 mm) O.D. at the luminaire end, mechanically assembled to the central housing.

The mounting arms include a decorative bent piece of aluminum rod mechanically assembled to the arm and to the pole using stainless steel hardware, complete with decorative cast aluminum cap on each end.


The central pole adaptor is complete with a cast-aluminum cap, slip-fits 9" (229 mm) over a 4" (102 mm), 5" (127 mm) or 5 9/16" (141 mm) O.D. pole or tenon.

Configurations




VR4

EPA: 3.49 sq.ft. **Weight:** 26.0 lbs. (11.8 kg)

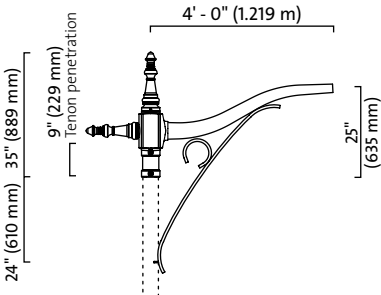


VR6

EPA: 4.44 sq.ft. **Weight:** 30.0 lbs. (13.6 kg)

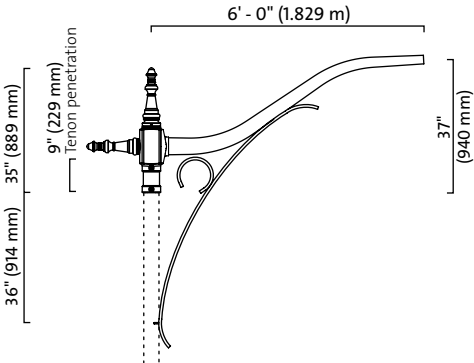

VR8

EPA: 5.33 sq.ft. **Weight:** 39.0 lbs. (17.7 kg)

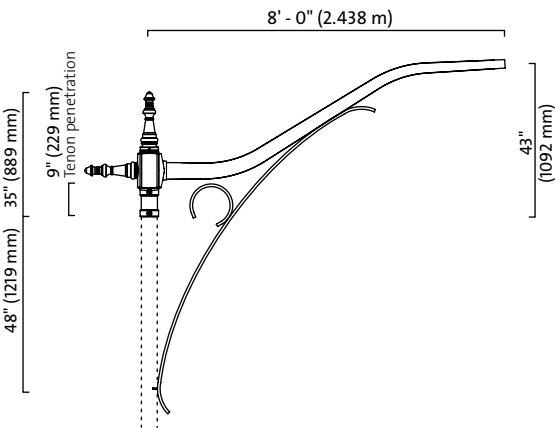

Specifications:

The **VR4 / VR6 / VR8** mounting arms feature a tapered spun aluminum arm of 4" by 2 7/8" (102 by 73 mm) to 2 3/8" (60 mm) O.D. at the luminaire end, mechanically assembled to the central housing.


The mounting arms include a decorative U-channel made of bent aluminum, mechanically assembled to the pole and to the arm using stainless steel hardware.

The central pole adaptor is complete with a decorative cast-aluminum cap. With the IA configuration a cast-aluminum decorative side cap is added. The central pole adaptor slip-fits 9" (229 mm) over a 4" (102 mm), 5" (127 mm) or 5 9/16" (141 mm) O.D. pole or tenon.

Configurations


PC4

EPA: 2.88 sq.ft. Weight: 25.0 lbs. (11.3 kg)

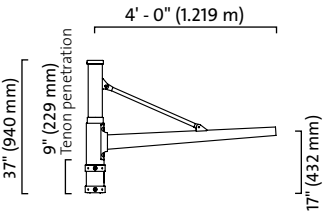


PC6

EPA: 3.63 sq.ft. Weight: 28.0 lbs. (12.7 kg)

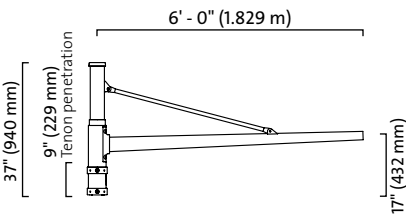

PC8

EPA: 4.39 sq.ft. Weight: 37.0 lbs. (16.8 kg)

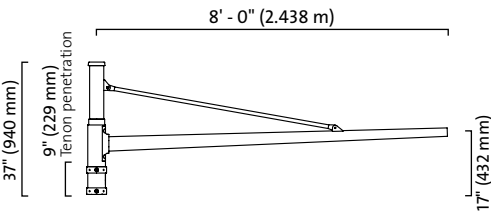

Specifications:

The **PC4 / PC6 / PC8** mounting arms feature a tapered spun aluminum arm of 4" by 2 7/8" (102 by 73 mm) to 2 3/8" (60 mm) O.D. at the luminaire end, mechanically assembled to the central housing.

The mounting includes a decorative extruded-aluminum tube mechanically assembled to the arm and to the central pole adaptor using stainless steel hardware.


The central pole adaptor is complete with a cast-aluminum cap, slip-fits 9" (229 mm) over a 4" (102 mm), 5" (127 mm) or 5 9/16" (141 mm) O.D. pole or tenon.

Configurations

1A 2 4


PR4

EPA: 2.73 sq.ft. **Weight:** 26.0 lbs. (11.8 kg)

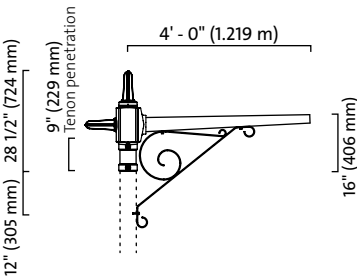


PR6

EPA: 3.44 sq.ft. **Weight:** 31.0 lbs. (14.1 kg)

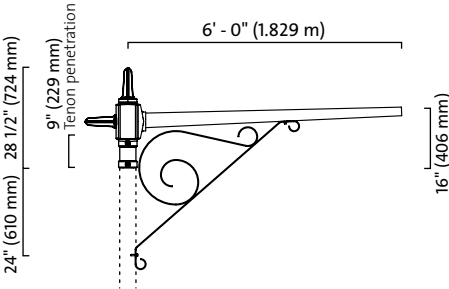

PR8

EPA: 4.14 sq.ft. **Weight:** 40.0 lbs. (18.1 kg)

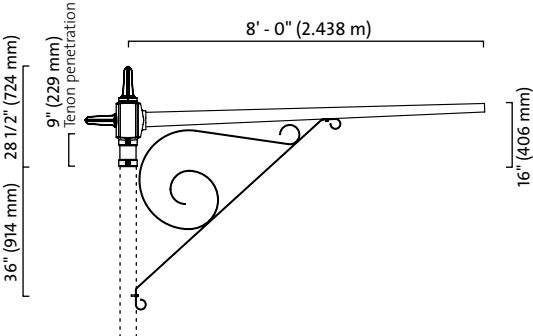

Specifications:

The **PR4 / PR6 / PR8** mounting arms feature a tapered spun aluminum arm of 4" by 2 7/8" (102 by 73 mm) to 2 3/8" (60 mm) O.D. at the luminaire end, mechanically assembled to the central housing.

The mounting arms include a decorative bent piece of aluminum, mechanically assembled to the pole and to the arm using stainless steel hardware.

The central pole adaptor is complete with a decorative cast-aluminum cap. With the IA configuration a cast-aluminum decorative side cap is added. The central pole adaptor slip-fits 9" (229 mm) over a 4" (102 mm), 5" (127 mm) or 5 9/16" (141 mm) O.D. pole or tenon.

Configuration	1A	2	4
	○	○	○



www.lumec.com

LUMEC HEAD OFFICE

640, Curé-Boivin Boulevard
Boisbriand, Québec
Canada J7G 2A7

T : 450.430.7040

F : 450.430.1453

ONTARIO OFFICE

189 Bullock Drive
Markham, Ontario
Canada L3P 1W4

T : 416.223.7255

F : 866.971.2825

MEXICO OFFICE

Zempoala #217
Col. Antenor Salas (Narvarte)
Mexico, D.F. 03010

T : (5255) 5564.5242

F : 450.971.2816

For the details of our different agents and representatives, please consult the **Contact us** section of our Website.

© 2010 Philips Group.

All rights reserved. We reserve the right to change details of design, materials and finishes.



/ Some luminaires use fluorescent or high intensity discharge (HID) lamps that contain small amounts of mercury. Such lamps are labeled "Contains Mercury" and/or with the symbol "Hg." Lamps that contain mercury must be disposed of in accordance with local requirements. Information regarding lamp recycling and disposal can be found at www.lamprecycle.org



The choice to not print paper brochures anymore but to make them available on-line is an example of the positive environmental actions that Philips Lumec has decided to undertake. This not only considerably reduces our paper consumption but also guarantees the exactitude of the information our clients receive.