

**PHILIPS**

**GARDCO**

Wall Mount

LED mini sconce 111L



# Offering the most diverse line of **performance**

The Philips Gardco LED mini sconce 111L luminaires offer timeless design, intelligent engineering and dependable construction. Scale and proportion are appropriate and pleasing from every viewpoint. These extremely compact luminaires provide full cutoff performance without the high angle brightness caused by refractor type products, making these sconces the perfect choice for controlled illumination above doorways and ATMs.



## LED mini scone 111L

- Uses less energy than HID
- Uniform distribution free of hot spots, streaks or striations
- Complete IP66 rated luminaire
- Maintains long LED life
- Controls glare and light trespass
- Meet zero uplight criteria
- Advanced Class 1 LED array system


### Ordering guide

example: 111L-16L-350-CW-G2-2-UNV-DD-BK

Prefix	No. of LEDs	Drive Current	Color / Generation	Distribution	Voltage	Options (controls)	Options (electrical)	Finish
<b>111L</b>	<b>16</b>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
<b>111L</b> Trapezoidal Wedge LED Constant Wattage/Full Light Output (when power to the luminaire is energized)	<b>16L</b> 16 LED module	<b>350</b> 350mA <b>550</b> 550mA <b>750</b> 750mA	<b>CW-G2</b> Cool White 5700K, 70 CRI generation 2 <b>NW-G2</b> Neutral White 4000K, 70 CRI generation 2 <b>WW-G2</b> Warm White 3000K, 70 CRI generation 2	<b>2</b> Type II Wide Throw Optic, with maximized lateral throw <b>3</b> Type III Preferred Wide Throw Optic, with improved forward throw <b>4</b> Type IV maximized forward throw optic	<b>UNV</b> 120-277V 50hz/60hz <b>120</b> 120V <b>208</b> 208V <b>240</b> 240V <b>277</b> 277V	<b>PCB</b> Photocontrol Button? <b>DD</b> Trapezoidal Wedge LED, 0-10V Dimming for connection to a control system (provided by others)	<b>F1</b> Single fusing (120, 277VAC) <sup>1</sup> <b>F2</b> Double fusing (208, 240VAC) <sup>1</sup> <b>F3</b> Canadian double pull fusing (208, 240VAC) <sup>1</sup> <b>DL</b> Diffusing Lens (reduces fixture performance significantly) <b>WS</b> Wall Mounted Box for Surface Conduit <sup>2</sup>	<b>Textured</b> <b>BK</b> Black <b>WH</b> White <b>BZ</b> Bronze <b>DGY</b> Dark Grey <b>MGY</b> Medium Grey <b>Customer specified</b> <b>RAL</b> Specify optional color or RAL (ex: OC-LGP or OC-RAL7024) <b>CC</b> Custom color (must supply color chip for required factory quote)

1. Provide specific input voltage.
2. Rear entry permitted.

### Dimensions

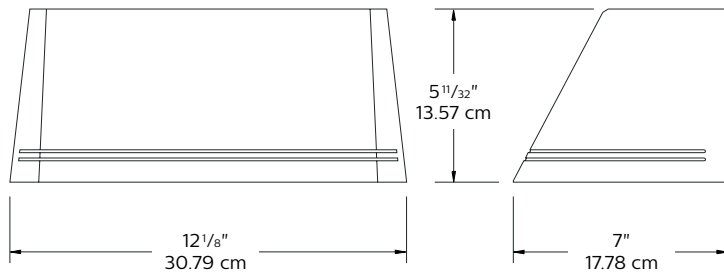

## LED mini scone 111L

Lumen range: 1,768-3,591  
Wattage range: 18-40  
Efficacy range: 98-95lm/W  
Weight: 8.3 lbs (3.63 kg) max

**Note:** Mounting plate center is located in the center of the luminaire width and 2.38" (6.03cm) above the luminaire bottom (lens down position). Splices must be made in the J-box (by others). Mounting plate must be secured by max. 5/16" (.79cm) diameter bolts (by others) structurally to the wall.

Prior to ordering, consult specification sheets on [www.philips.com/luminaires](http://www.philips.com/luminaires) for the most current information, notes, and exclusions.

© 2016 Philips Lighting Holding B.V. All rights reserved. Philips reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication. [philips.com/luminaires](http://philips.com/luminaires)



Philips Lighting, North America Corporation  
200 Franklin Square Drive, Somerset, NJ 08873  
Tel. 855-486-2216

Philips Lighting Canada Ltd.  
281 Hillmount Rd, Markham, ON, Canada L6C 2S3  
Tel. 800-668-9008