


# Vaya LED Spot / LED 射灯

## BGP310 ILED / BGP311 ILED


Mounting instruction/ 安装说明

444100018161




| Type Number<br>产品型号 | LEDs<br>颗粒数 | Power<br>功率 | Voltage<br>电压 | IK level<br>IK等级 | kg   |
|---------------------|-------------|-------------|---------------|------------------|------|
| BGP310 ILED MB      | I           | 2.15W       | 24V DC        | 08               | 0.36 |
| BGP310 ILED NB      | I           | 2.15W       | 24V DC        | 07               | 0.36 |
| BGP311 ILED MB      | I           | 2.15W       | 24V DC        | 08               | 0.41 |
| BGP311 ILED NB      | I           | 2.15W       | 24V DC        | 07               | 0.41 |

BGP310 ILED

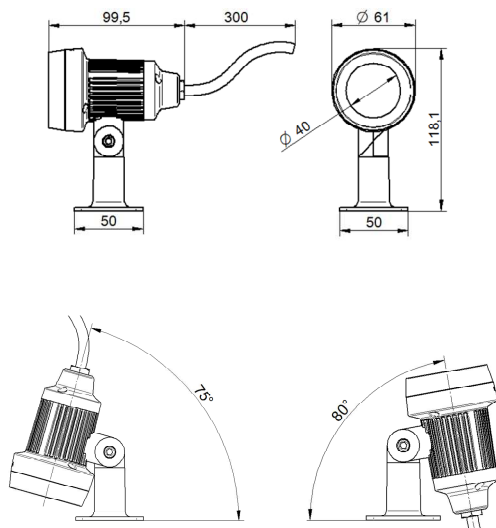

Unit: mm  
单位: mm


BGP311 ILED

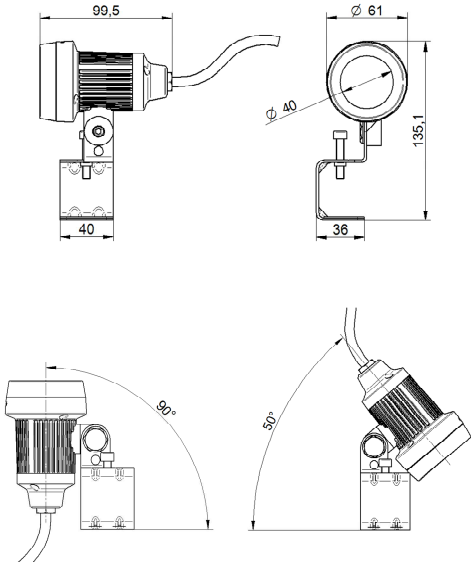

A


### 表面安装 Surface mounting

打安装孔，预埋两个膨胀管。  
Drill holes, and insert two plastic expansion nuts.

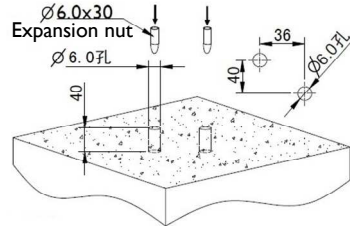


NOTE: 膨胀管规格 6×30mm, 自攻螺丝规格 SUS ST3.5×32mm  
Expansion tube size: 6×30mm; tapping screw size: SUS ST3.5×32mm

使用两颗自攻螺丝固定灯具。  
Fix luminaire by two sharp corner tapping screws.

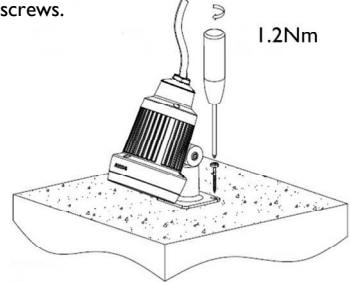

设置灯具投射角度，然后固定。  
Set the projecting angle, and then lock the angle.

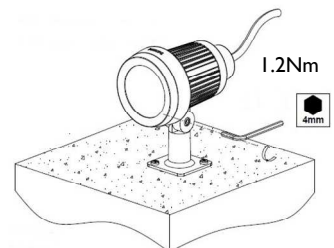


Philips (China) Investment Co., Ltd.  
Address: No. 1602-1605, No. 218 Tianmu W Rd, Shanghai  
Postalcode: 200070  
飞利浦（中国）投资有限公司  
地址：中国上海市天目西路218号1602-1605  
邮编：200070


# PHILIPS

## B 夹子安装 Clip mounting


将固定板置于薄板上，再将灯具安置于其上。  
Put mounting plate on the thin solid, and then set the luminaire.

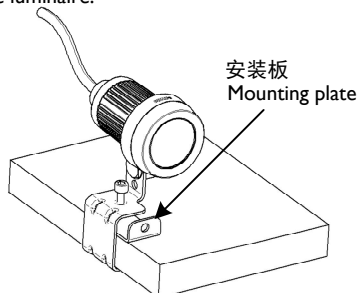


锁紧螺丝，充分紧固。  
Fully tighten the screws.

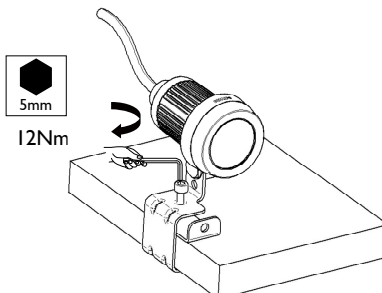

设置灯具投射角度，然后固定。  
Set the projecting angle, and then lock the angle.

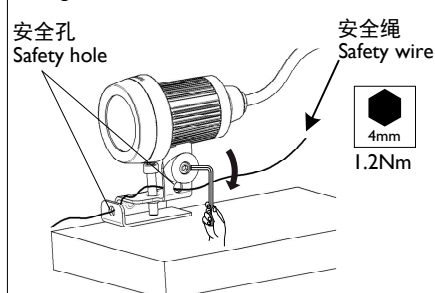

NOTE: 推荐用户采用安全绳穿过夹子和固定板上的安全孔(Ø7mm)，用作安全保护。(安全绳客户自购)  
Recommend end user use safety wire through the safety hole(Ø7mm) of clip and mounting plate for safety protection.  
Safety wire prepared by end user.

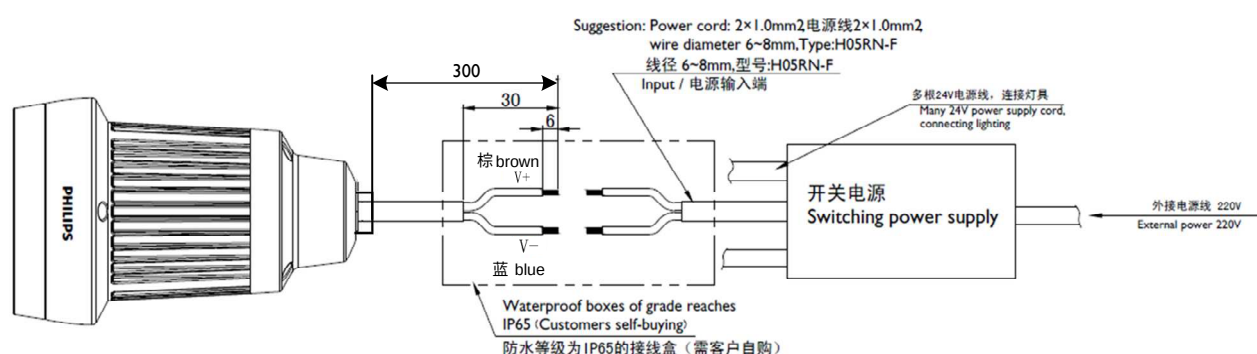

NOTE: IP65防水接线盒内部应有导线固定装置  
IP65 waterproof junction box should contain cable clamp to ensure a complete IP65 system.

1. The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.  
灯具应由有资格的电工安装，接线要符合IEE电气标准或国家标准。
2. Do not switch on before complete installation.  
接线过程中，切勿通电。
3. The wire connection method is determined by local electrical codes and regulations, typically either wire nuts or screws terminal blocks.  
接线方式取决于当地电气法规及规定，一般使用螺纹旋紧型导线连接器或螺钉接线端子。
4. The external cable of this luminaire can not be replaced, if the cord is damaged, the luminaire shall be destroyed.  
此灯具外部线缆或软线不能替换；如果软线损坏，该灯具即报废。
5. This luminaire can only be used in C1 C2 C3 environment, defined by ISO 12944-2.  
该灯具只适用于ISO 12944-2定义的C1 C2 C3类环境。
6. Chemical fertilizer, pesticide and other corrosive materials may cause corrosion to luminaire.  
化肥、农药等腐蚀性化学物质可能会对灯具壳体造成腐蚀。

