


PHILIPS ADVANCE

Electrical Specifications

IOP-2S54-L-SD@120V	
Brand Name	STEP-DIM
Ballast Type	Electronic
Starting Method	Programmed Start
Lamp Connection	Series
Input Voltage	120-277
Input Frequency	50/60HZ
Status	Active

Lamp Type	Num. of Lamps	Rated Lamp Watts	Min. Start Temp (°F/C)	Input Current (Amps)	Input Power (ANSI Watts)	Ballast Factor	MAX THD %	Power Factor	MAX Lamp Current Crest Factor	B.E.F.
F54T5/HO 100%	1	54	32/00	0.50	60	1.05	10	0.97	1.7	1.75
* F54T5/HO 100%	2	54	32/00	0.98	116	1.00	10	0.98	1.7	0.86
F54T5/HO 50%	1	54	32/00	0.26	30	1.05	10	0.95	1.7	3.50
F54T5/HO 50%	2	54	32/00	0.45	53	0.40	10	0.95	1.7	0.75
F54T5/HO/ES (44W) 100%	1	44	50/10	0.42	50	1.05	10	0.97	1.7	2.10
F54T5/HO/ES (44W) 100%	2	44	50/10	0.82	99	1.01	10	0.98	1.7	1.02
F54T5/HO/ES (49W) 100%	1	49	50/10	0.46	55	1.06	10	0.97	1.7	1.93
F54T5/HO/ES (49W) 100%	2	49	50/10	0.87	105	1.04	10	0.98	1.7	0.99

Wiring Diagram

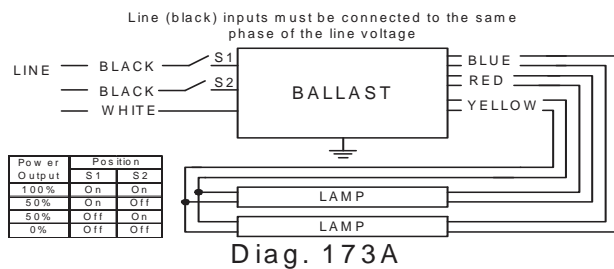


The wiring diagram that appears above is for the lamp type denoted by the asterisk (*)

Standard Lead Length (inches)

	in.	cm.
Black	25	63.5
White	25	63.5
Blue	28	71.1
Red	28	71.1
Yellow	48	121.9
Gray		0
Violet		0

	in.	cm.
Yellow/Blue		0
Blue/White		0
Brown		0
Orange		0
Orange/Black		0
Black/White		0
Red/White		0

Enclosure

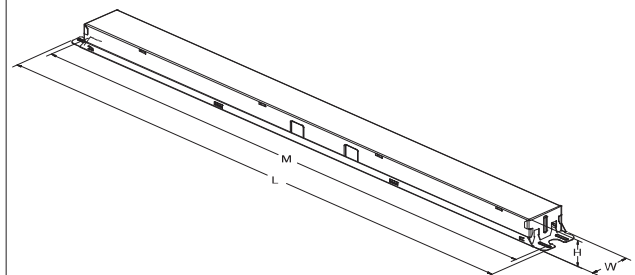

Enclosure Dimensions

OverAll (L)	Width (W)	Height (H)	Mounting (M)
16.70 "	1.18 "	1.00 "	16.34 "
16 7/10	1 9/50	1	16 17/50
42.4 cm	3 cm	2.5 cm	41.5 cm



Revised 10/31/13

Data is based upon tests performed by Philips Lighting N.A in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

Philips Lighting Electronic N.A

10275 West Higgins Road Rosemont, IL 60018 Tel.: 800-322-2086 Fax: 888-432-1882
Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886

PHILIPS ADVANCE

IOP-2S54-L-SD@120V	
Brand Name	STEP-DIM
Ballast Type	Electronic
Starting Method	Programmed Start
Lamp Connection	Series
Input Voltage	120-277
Input Frequency	50/60HZ
Status	Active

Electrical Specifications

Notes:

Section I - Physical Characteristics

- 1.1 Ballast shall be physically interchangeable with standard electromagnetic or standard electronic ballasts, where applicable.
- 1.2 Ballast shall be provided with integral leads color-coded per ANSI C82.11.

Section II - Performance

- 2.1 Ballast shall be Programmed Start.
- 2.2 Ballast shall contain auto restart circuitry in order to restart lamps without resetting power.
- 2.3 Ballast shall operate from 50/60 Hz input source of 120V through 277V with sustained variations of +/- 10% (voltage and frequency).
- 2.4 Ballast shall be high frequency electronic type and operate lamps at a frequency above 42 kHz to avoid interference with infrared devices and eliminate visible flicker.
- 2.5 Ballast shall have a Power Factor greater than 0.98 at 100% power and greater than 0.90 at 50% power for primary lamp.
- 2.6 Ballast shall have a ballast factor of 0.87 for primary T8 lamps or a ballast factor of 0.95 or 1.15 for primary T5HE lamps or a ballast factor of 1.0 for primary T5HO lamps at full light output.
- 2.7 Ballast shall provide for a Lamp Current Crest Factor of 1.7 or less.
- 2.8 Ballast input current shall have Total Harmonic Distortion (THD) of less than 10% when operated at nominal line and 100% power.
- 2.9 Ballast shall have a Class A sound rating.
- 2.10 Ballast shall have a minimum starting temperature of 0C (32F) for standard T5HE and T5HO lamps or -18C (0F) for standard T8 lamps or 16C (60F) for energy-saving T8 lamps or 10C (50F) for energy-saving T5HO lamps. Consult lamp manufacturer for temperature versus light output characteristics.
- 2.11 Ballast shall tolerate sustained open circuit and short circuit output conditions.
- 2.12 Ballast shall provide Lamp EOL Protection Circuit for T5 lamps.
- 2.13 Ballast shall control light output in two steps: 100% power and 50% power. Control shall be any device that switches the line voltage input. Both line voltage inputs must be on the same phase.
- 2.14 Ballast shall ignite the lamps at any light output setting without first going to another output setting.

Section III - Regulatory

- 3.1 Ballast shall not contain any Polychlorinated Biphenyl (PCB).
- 3.2 Ballast shall be Underwriters Laboratories (UL) listed, Class P and Type 1 Outdoor; and Canadian Standards Association (CSA) certified where applicable.
- 3.3 Ballast shall comply with ANSI C62.41 Category A for Transient protection.
- 3.4 Ballast shall comply with ANSI C82.11 where applicable.
- 3.5 Ballast shall comply with applicable requirements of the Federal Communications Commission (FCC) rules and regulations, Title 47 CFR part 18, for Non-Consumer equipment.
- 3.6 Ballast shall comply with UL Type CC rating.
- 3.7 Ballast shall comply with NEMA 410 for in-rush current limits.

Section IV - Other

- 4.1 Ballast shall be manufactured in a factory certified to ISO 9001 Quality System Standards.
- 4.2 Ballast shall carry a five-year limited warranty from date of manufacture against defects in material for operation at a maximum case temperature of 70C.
- 4.3 Manufacturer shall have a twenty-year history of producing electronic ballasts for the North American market
- 4.4 Ballast shall be Philips Advance part # _____ or approved equal.



Revised 10/31/13

Data is based upon tests performed by Philips Lighting Electronic N.A. in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

Philips Lighting Electronic N.A.

10275 West Higgins Road Rosemont, IL 60018 Tel.: 800-322-2086 Fax: 888-432-1882
Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886


PHILIPS ADVANCE

Electrical Specifications

IOP-2S54-L-SD@277V	
Brand Name	STEP-DIM
Ballast Type	Electronic
Starting Method	Programmed Start
Lamp Connection	Series
Input Voltage	120-277
Input Frequency	50/60HZ
Status	Active

Lamp Type	Num. of Lamps	Rated Lamp Watts	Min. Start Temp (°F/C)	Input Current (Amps)	Input Power (ANSI Watts)	Ballast Factor	MAX THD %	Power Factor	MAX Lamp Current Crest Factor	B.E.F.
* F54T5/HO	1	54	32/00	0.23	60	1.05	10	0.97	1.7	1.75
F54T5/HO	2	54	32/00	0.42	114	1.00	10	0.98	1.7	0.88
F54T5/HO 50%	1	54	32/00	0.11	30	0.40	10	0.95	1.7	1.33
F54T5/HO 50%	2	54	32/00	0.19	52	0.40	10	0.95	1.7	0.77
F54T5/HO/ES (44W) 100%	1	44	50/10	0.20	49	1.05	10	0.97	1.7	2.14
F54T5/HO/ES (44W) 100%	2	44	50/10	0.36	97	1.01	10	0.98	1.7	1.04
F54T5/HO/ES (49W) 100%	1	49	50/10	0.21	54	1.06	10	0.97	1.7	1.96
F54T5/HO/ES (49W) 100%	2	49	50/10	0.38	103	1.04	10	0.98	1.7	1.01

Wiring Diagram

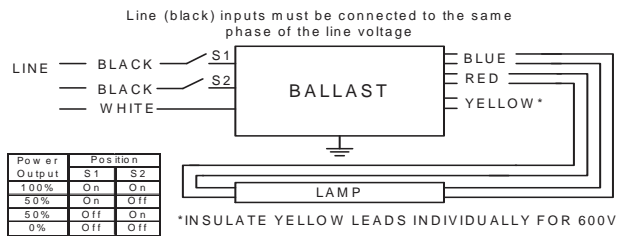

Diag. 170A


The wiring diagram that appears above is for the lamp type denoted by the asterisk (*)

Standard Lead Length (inches)

	in.	cm.
Black	25	63.5
White	25	63.5
Blue	28	71.1
Red	28	71.1
Yellow	48	121.9
Gray		0
Violet		0

	in.	cm.
Yellow/Blue		0
Blue/White		0
Brown		0
Orange		0
Orange/Black		0
Black/White		0
Red/White		0

Enclosure

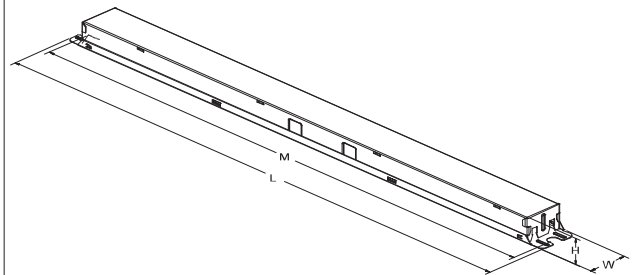

Enclosure Dimensions

OverAll (L)	Width (W)	Height (H)	Mounting (M)
16.70 "	1.18 "	1.00 "	16.34 "
16 7/10	1 9/50	1	16 17/50
42.4 cm	3 cm	2.5 cm	41.5 cm



Revised 10/31/13

Data is based upon tests performed by Philips Lighting N.A in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

Philips Lighting Electronic N.A

10275 West Higgins Road Rosemont, IL 60018 Tel.: 800-322-2086 Fax: 888-432-1882
Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886

PHILIPS ADVANCE

IOP-2S54-L-SD@277V	
Brand Name	STEP-DIM
Ballast Type	Electronic
Starting Method	Programmed Start
Lamp Connection	Series
Input Voltage	120-277
Input Frequency	50/60HZ
Status	Active

Electrical Specifications

Notes:

Section I - Physical Characteristics

- 1.1 Ballast shall be physically interchangeable with standard electromagnetic or standard electronic ballasts, where applicable.
- 1.2 Ballast shall be provided with integral leads color-coded per ANSI C82.11.

Section II - Performance

- 2.1 Ballast shall be Programmed Start.
- 2.2 Ballast shall contain auto restart circuitry in order to restart lamps without resetting power.
- 2.3 Ballast shall operate from 50/60 Hz input source of 120V through 277V with sustained variations of +/- 10% (voltage and frequency).
- 2.4 Ballast shall be high frequency electronic type and operate lamps at a frequency above 42 kHz to avoid interference with infrared devices and eliminate visible flicker.
- 2.5 Ballast shall have a Power Factor greater than 0.98 at 100% power and greater than 0.90 at 50% power for primary lamp.
- 2.6 Ballast shall have a ballast factor of 0.87 for primary T8 lamps or a ballast factor of 0.95 or 1.15 for primary T5HE lamps or a ballast factor of 1.0 for primary T5HO lamps at full light output.
- 2.7 Ballast shall provide for a Lamp Current Crest Factor of 1.7 or less.
- 2.8 Ballast input current shall have Total Harmonic Distortion (THD) of less than 10% when operated at nominal line and 100% power.
- 2.9 Ballast shall have a Class A sound rating.
- 2.10 Ballast shall have a minimum starting temperature of 0C (32F) for standard T5HE and T5HO lamps or -18C (0F) for standard T8 lamps or 16C (60F) for energy-saving T8 lamps or 10C (50F) for energy-saving T5HO lamps. Consult lamp manufacturer for temperature versus light output characteristics.
- 2.11 Ballast shall tolerate sustained open circuit and short circuit output conditions.
- 2.12 Ballast shall provide Lamp EOL Protection Circuit for T5 lamps.
- 2.13 Ballast shall control light output in two steps: 100% power and 50% power. Control shall be any device that switches the line voltage input. Both line voltage inputs must be on the same phase.
- 2.14 Ballast shall ignite the lamps at any light output setting without first going to another output setting.

Section III - Regulatory

- 3.1 Ballast shall not contain any Polychlorinated Biphenyl (PCB).
- 3.2 Ballast shall be Underwriters Laboratories (UL) listed, Class P and Type 1 Outdoor; and Canadian Standards Association (CSA) certified where applicable.
- 3.3 Ballast shall comply with ANSI C62.41 Category A for Transient protection.
- 3.4 Ballast shall comply with ANSI C82.11 where applicable.
- 3.5 Ballast shall comply with applicable requirements of the Federal Communications Commission (FCC) rules and regulations, Title 47 CFR part 18, for Non-Consumer equipment.
- 3.6 Ballast shall comply with UL Type CC rating.
- 3.7 Ballast shall comply with NEMA 410 for in-rush current limits.

Section IV - Other

- 4.1 Ballast shall be manufactured in a factory certified to ISO 9001 Quality System Standards.
- 4.2 Ballast shall carry a five-year limited warranty from date of manufacture against defects in material for operation at a maximum case temperature of 70C.
- 4.3 Manufacturer shall have a twenty-year history of producing electronic ballasts for the North American market
- 4.4 Ballast shall be Philips Advance part # _____ or approved equal.



Revised 10/31/13

Data is based upon tests performed by Philips Lighting Electronic N.A. in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

Philips Lighting Electronic N.A.

10275 West Higgins Road Rosemont, IL 60018 Tel.: 800-322-2086 Fax: 888-432-1882
Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886