


PHILIPS ADVANCE

Electrical Specifications

VLO-2S13-TP	
Brand Name	COMPACT-OPEN
Ballast Type	Magnetic
Starting Method	Pre-Heat
Lamp Connection	Series
Input Voltage	277
Input Frequency	60 HZ
Status	Active

Lamp Type	Num. of Lamps	Rated Lamp Watts	Min. Start Temp (°F/°C)	Input Current (Amps)	Starting Current (Amps)	Open Circuit (Amps)	Input Power (Watts)	Ballast Factor	MAX THD %	Power Factor
* CFQ13W/GX23	2	13	32/00	0.31	0.38	0.00	34	0.95	15	0.40
CFQ26W/G24D	1	26	50/10	0.33	0.40	0.00	34	0.98	15	0.37
CFT13W/GX23	2	13	32/00	0.25	0.38	0.00	34	0.95	15	0.40

Wiring Diagram

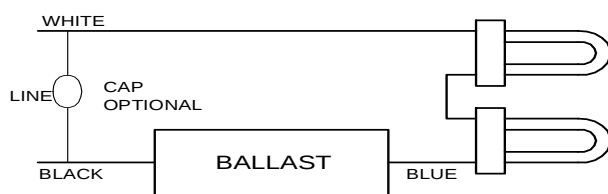

Diag. 46

The wiring diagram that appears above is for the lamp type denoted by the asterisk (*)

Standard Lead Length (inches)

	in.	cm.
Black	14	35.6
White		0
Blue	7	17.8
Red		0
Yellow		0
Gray		0
Violet		0

	in.	cm.
Yellow/Blue		0
Blue/White		0
Brown		0
Orange		0
Orange/Black		0
Black/White		0
Red/White		0

Enclosure

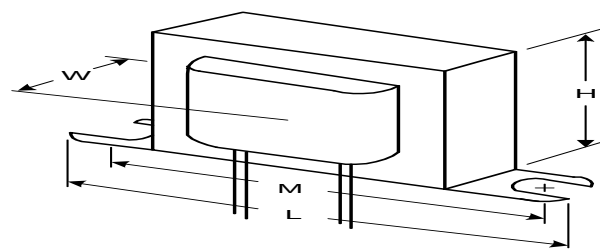


Fig. X-3 through X-8

Enclosure Dimensions

OverAll (L)	Width (std)/(TP)	Height (H)	Mounting (M)
4.0 "	1.5625 "/1.8125 "	2.25 "	3.5 "
4	1 9/16 / 1 13/16	2 1/4	3 1/2
10.2 cm	4 cm / 4.6 cm	5.7 cm	8.9 cm



Revised 11/02/99

Data is based upon tests performed by Philips Lighting N.A in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

Philips Lighting Electronic N.A

10275 West Higgins Road Rosemont, IL 60018 Tel.: 800-322-2086 Fax: 888-432-1882
Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886


PHILIPS ADVANCE

Electrical Specifications

VLO-2S13-TP	
Brand Name	COMPACT-OPEN
Ballast Type	Magnetic
Starting Method	Pre-Heat
Lamp Connection	Series
Input Voltage	277
Input Frequency	60 HZ
Status	Active

Lamp Type	Num. of Lamps	Rated Lamp Watts	Min. Start Temp (°F/°C)	Input Current (Amps)	Starting Current (Amps)	Open Circuit (Amps)	Input Power (Watts)	Ballast Factor	MAX THD %	Power Factor
CFQ13W/GX23	2	13	32/00	0.31	0.38	0.00	34	0.95	15	0.40
* CFQ26W/G24D	1	26	50/10	0.33	0.40	0.00	34	0.98	15	0.37
CFT13W/GX23	2	13	32/00	0.25	0.38	0.00	34	0.95	15	0.40

Wiring Diagram

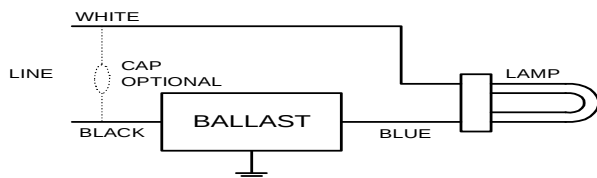

Diag. 140


The wiring diagram that appears above is for the lamp type denoted by the asterisk (*)

Standard Lead Length (inches)

	in.	cm.
Black	14	35.6
White		0
Blue	7	17.8
Red		0
Yellow		0
Gray		0
Violet		0

	in.	cm.
Yellow/Blue		0
Blue/White		0
Brown		0
Orange		0
Orange/Black		0
Black/White		0
Red/White		0

Enclosure

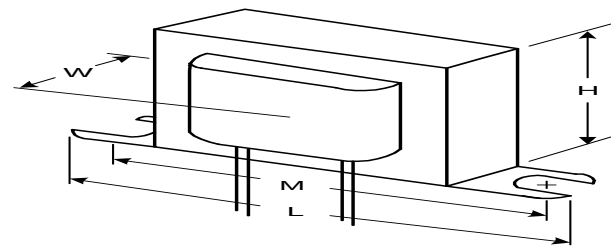

Enclosure Dimensions

OverAll (L)	Width (std)/(TP)	Height (H)	Mounting (M)
4.0 "	1.5625 "/1.8125 "	2.25 "	3.5 "
4	1 9/16 / 1 13/16	2 1/4	3 1/2
10.2 cm	4 cm / 4.6 cm	5.7 cm	8.9 cm



Revised 11/02/99

Data is based upon tests performed by Philips Lighting N.A in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

Philips Lighting Electronic N.A

10275 West Higgins Road Rosemont, IL 60018 Tel.: 800-322-2086 Fax: 888-432-1882
Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886