

SEE PAGE 1 FOR TRACK FIXTURE AND PAGE 2 FOR RECESSED FIXTURE (C4L15A SERIES)

## INSTALLING REFLECTOR

(REFLECTOR SOLD SEPARATELY)

REMOVE APERTURE HOUSING FROM HEAT SINK BY ROTATING APERTURE HOUSING COUNTER CLOCKWISE. PLACE REFLECTOR AGAINST REFLECTOR HOLDER, ROTATE REFLECTOR CLOCKWISE UNTIL IT LOCKS INTO HOLDER. PLACE APERTURE HOUSING AGAINST HEAT SINK, ROTATE CLOCKWISE TO LOCK INTO HEAT SINK. (FIG. 1)

NOTE:

USE GLOVES WHEN HANDLING REFLECTOR

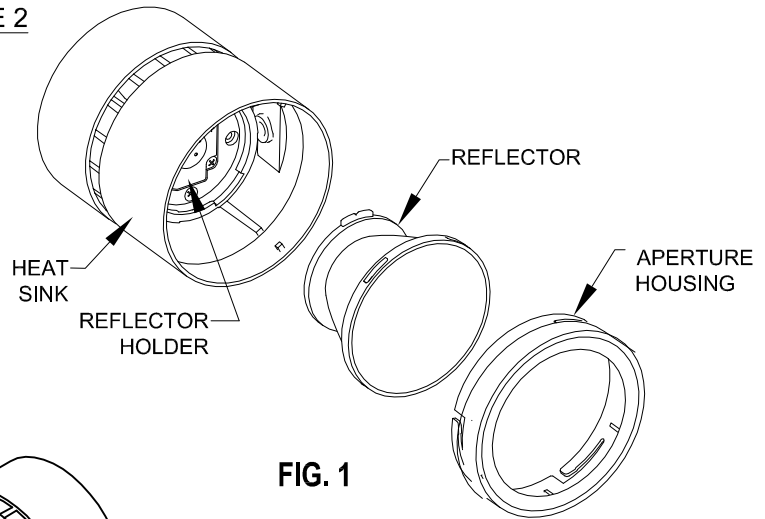


FIG. 1

## REFLECTOR COMPATIBILITY

LLAV11R SERIES FOR LLAV01 AND LLAV11 FIXTURES.  
LLAV12R SERIES FOR LLAV12 FIXTURES.

SEE FIG. 2 FOR  
ACCESSORY HOLDER  
LLAV11AH AND LLAV12AH

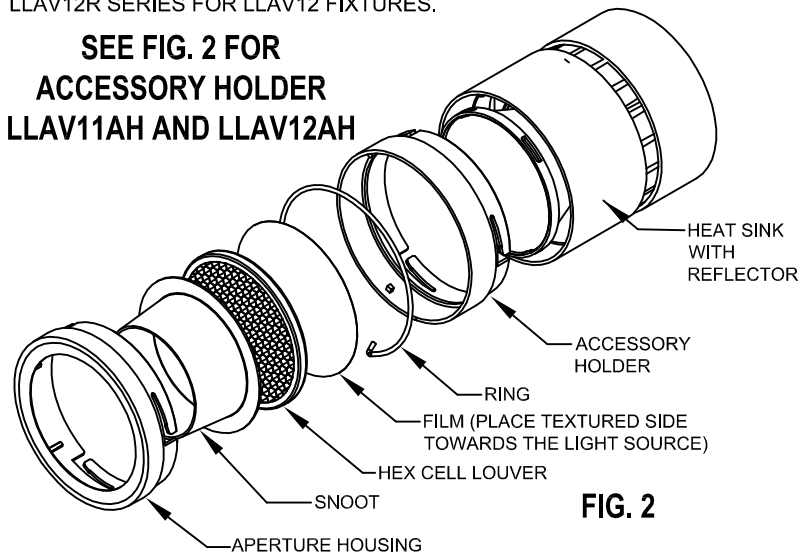



FIG. 2

## INSTALLING ACCESSORIES INTO FIXTURE

REMOVE APERTURE HOUSING FROM HEAT SINK BY ROTATING COUNTER CLOCKWISE. PLACE ACCESSORY HOLDER AGAINST HEAT SINK AND LOCK INTO POSITION BY ROTATING CLOCKWISE. **DO NOT** FORCE PAST STOP. PLACE ACCESSORIES INSIDE OF APERTURE HOUSING. SECURE ACCESSORIES WITH SPRING RING. ATTACH APERTURE HOUSING WITH ACCESSORIES TO ACCESSORY HOLDER BY PLACING AGAINST ACCESSORY HOLDER AND ROTATING CLOCKWISE. **DO NOT** FORCE PAST STOP. (FIG. 2)

## ACCESSORY HOLDERS COMPATIBILITY

MAX. # OF ACCESSORIES: (1) SNOOT + (1) HEX CELL + (2) FILMS

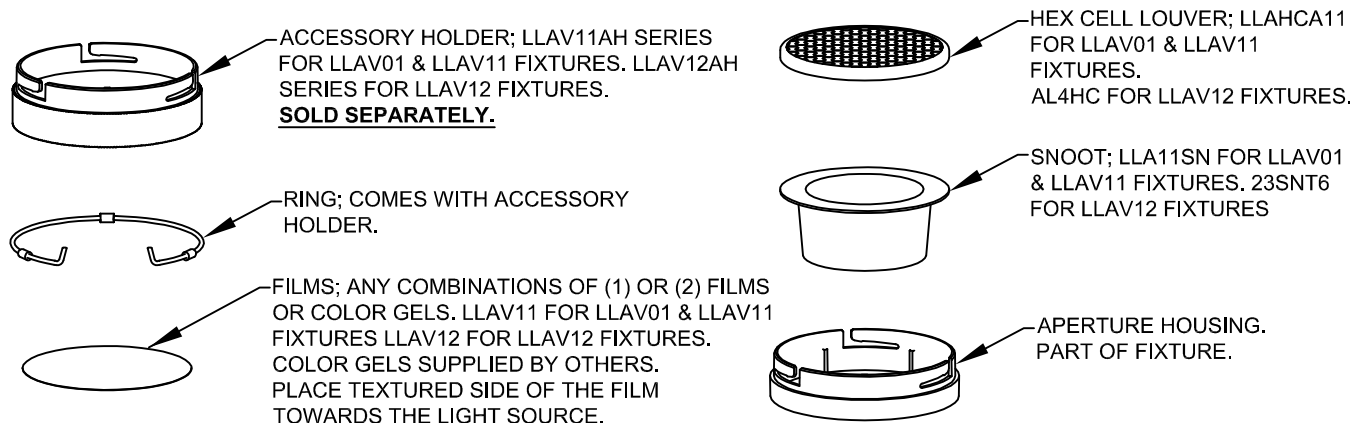

Read and understand these instructions before installing luminaire.  
This luminaire is intended for installation in accordance with the National Electrical Code and Local Regulations. To assure full compliance with local codes and regulations, check with your local electrical inspector before installation. To prevent electrical shock, turn off electricity at fuse box before proceeding.

Retain these instructions for maintenance reference.


## SNOOT COMPATIBILITY

LLA11SN FOR C4L15A\_SERIES FIXTURES

### Accessory Installation:

If desired, up to  $\frac{1}{4}$ " thk of 3-1/8" diameter Lightolier-brand-accessories (Accessory Films, Glass Lenses etc.) can be field installed to alter the beam pattern in a variety of different ways.

1. Remove Trim Section (if installed) by grasping edge of reflector flange and pulling downwards. Allow Trim Section to hang by tether.
2. Unscrew the Optic/Accessory Holder and remove from Finishing Section as shown below. Once the Optic/Accessory Holder has been removed, apply pressure to the front surface of the optic assembly with thumbs, while simultaneously holding the ring still with index fingers, and press the optic assembly out from the Threaded Ring.
3. Accessories can now be added to the stack of materials OR the stock optic can be replaced with an alternative Lightolier-brand optic if desired. Once alterations have been made, re-stack the assembly and press-fit back into the Threaded Ring, ensuring that the Retaining Ring is fully seated on the bottom of the Threaded Ring.
4. Once assembled, reinstall by screwing optic assembly back onto finishing section. Tighten until the optic assembly will not freely rotate anymore. Do not overtighten, as this could potentially make future replacements more difficult to perform.
5. Re-Install Trim Section. See Trim Section (C4L15A) instruction sheet for further instructions.

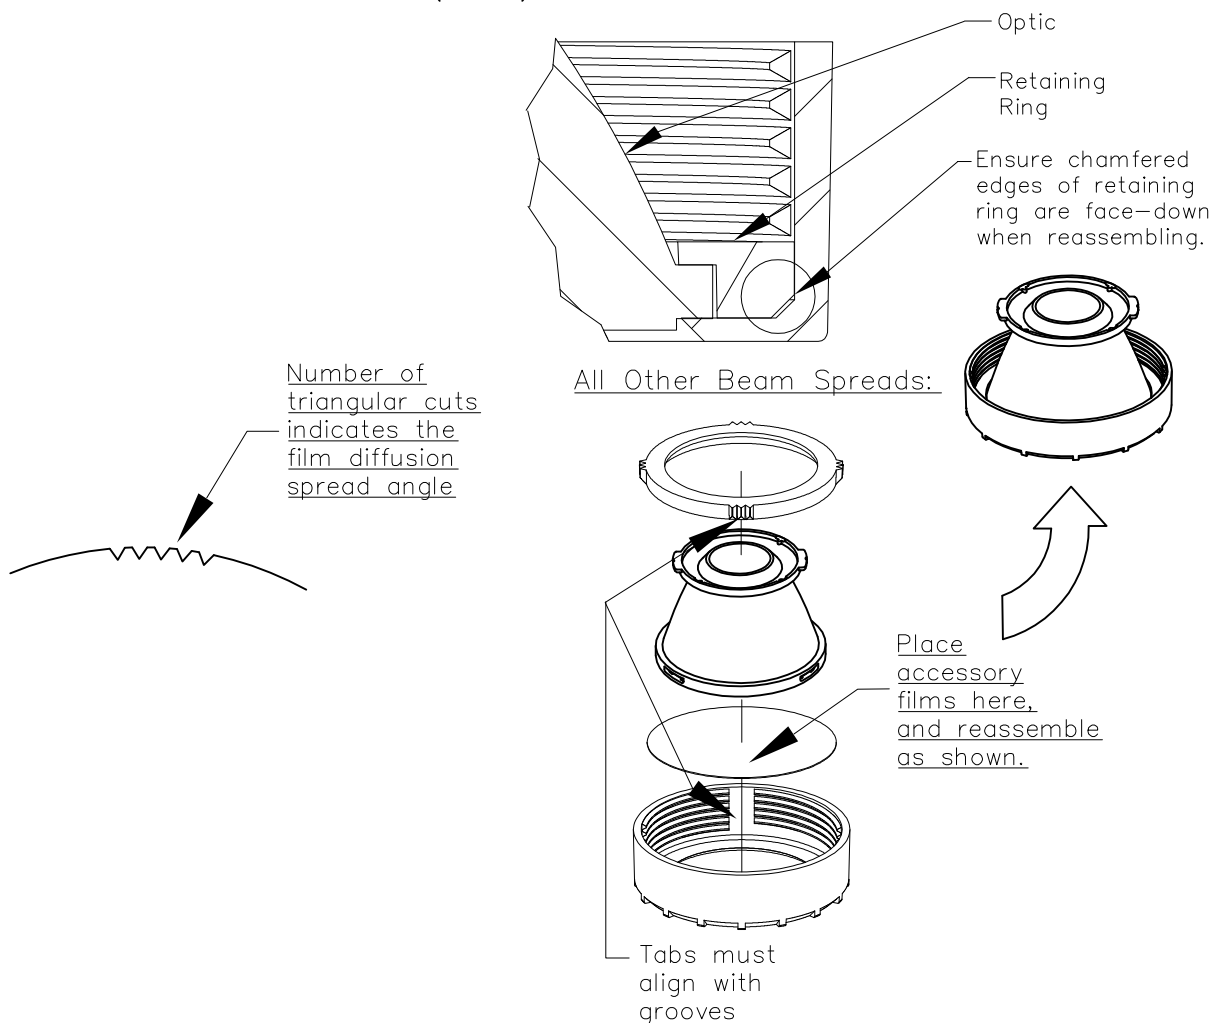

## VOIR PAGE 1 DE PISTE ET FIXATION PAGE 2 POUR ENCASTRÉ (SÉRIE C4L15A)

### INSTALLATION DU RÉFLECTEUR

(RÉFLECTEUR VENDU SÉPARÉMENT)

RETIRER LE LOGEMENT À OUVERTURE DU DISSIPATEUR THERMIQUE EN LE FAISANT TOURNER DANS LE SENS ANTIHORAIRE. PLACER LE RÉFLECTEUR DANS SON SUPPORT ET LE FAIRE TOURNER DANS LE SENS HORAIRE JUSQU'À CE QU'IL S'ARRÊTE COMPLÈTEMENT. PLACER LE LOGEMENT À OUVERTURE SUR LE DISSIPATEUR THERMIQUE ET LE FAIRE TOURNER DANS LE SENS HORAIRE JUSQU'À CE QU'IL S'ARRÊTE COMPLÈTEMENT. (FIG. 1)

REMARQUE:

UTILISER DES GANTS LORS DE LA MANIPULATION RÉFLECTEUR.

### COMPATIBILITÉ DU RÉFLECTEUR

SÉRIE LLAV11R POUR LES LUMINAIRES LLAV01 ET LLAV11.

SÉRIE LLAV12R POUR LES LUMINAIRES LLAV12.

VOIR LA FIG. 2 POUR UNE

ILLUSTRATION DU  
PORTE-ACCESSOIRE  
LLAV11AH ET LLAV12AH

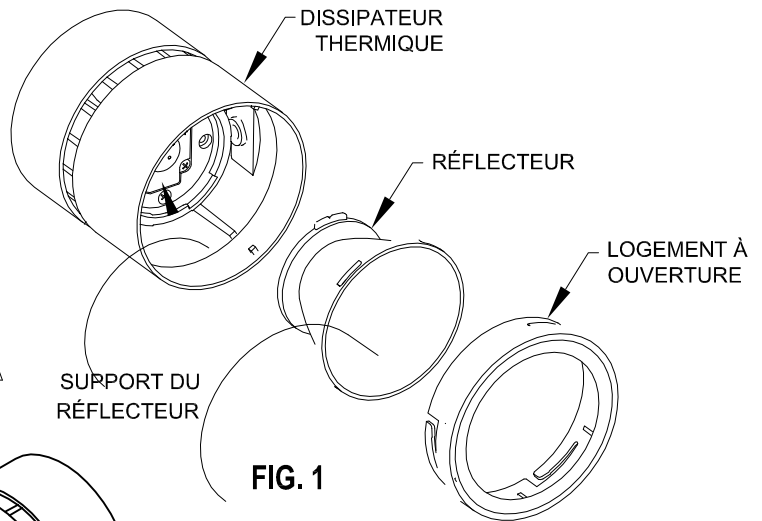


FIG. 1

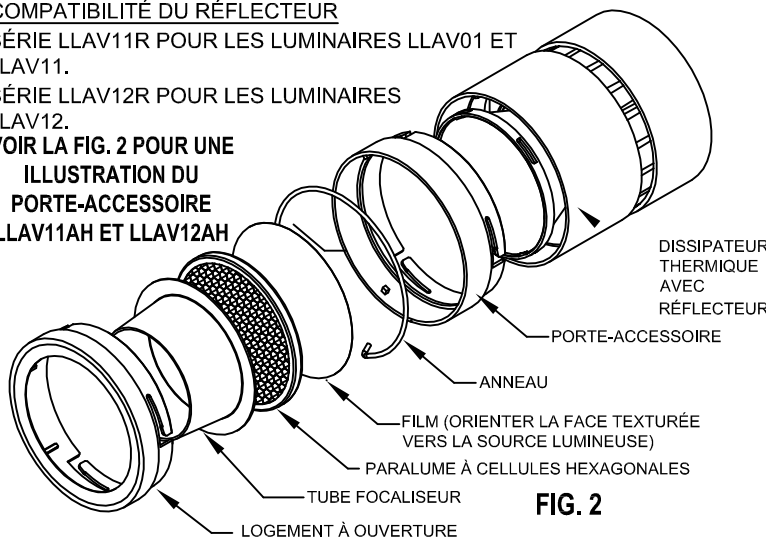


FIG. 2


### INSTALLATION DES ACCESSOIRES DANS LE LUMINAIRE

RETIRER LE LOGEMENT À OUVERTURE DU DISSIPATEUR THERMIQUE EN LE FAISANT TOURNER DANS LE SENS ANTIHORAIRE. PLACER LE PORTE-ACCESSOIRE SUR LE DISSIPATEUR THERMIQUE ET LE FAIRE TOURNER DANS LE SENS HORAIRE JUSQU'À CE QU'IL S'ARRÊTE COMPLÈTEMENT. NE PAS FORCER UNE FOIS BLOQUÉ. PLACER LES ACCESSOIRES À L'INTÉRIEUR DU LOGEMENT À OUVERTURE. FIXER LES ACCESSOIRES À L'AIDE DE L'ANNEAU ÉLASTIQUE. FIXER LE LOGEMENT À OUVERTURE COMPORTANT LES ACCESSOIRES AU PORTE-ACCESSOIRE EN LE FAISANT TOURNER DANS LE SENS HORAIRE. NE PAS FORCER UNE FOIS BLOQUÉ. (FIG. 2)

## COMPATIBILITÉ DES PORTES-ACCESSOIRES

NOMBRE MAX. D'ACCESSOIRES : (1) TUBE FOCALISEUR + (1) PARALUME À CELLULES

HEXAGONALES + (2) FILMS

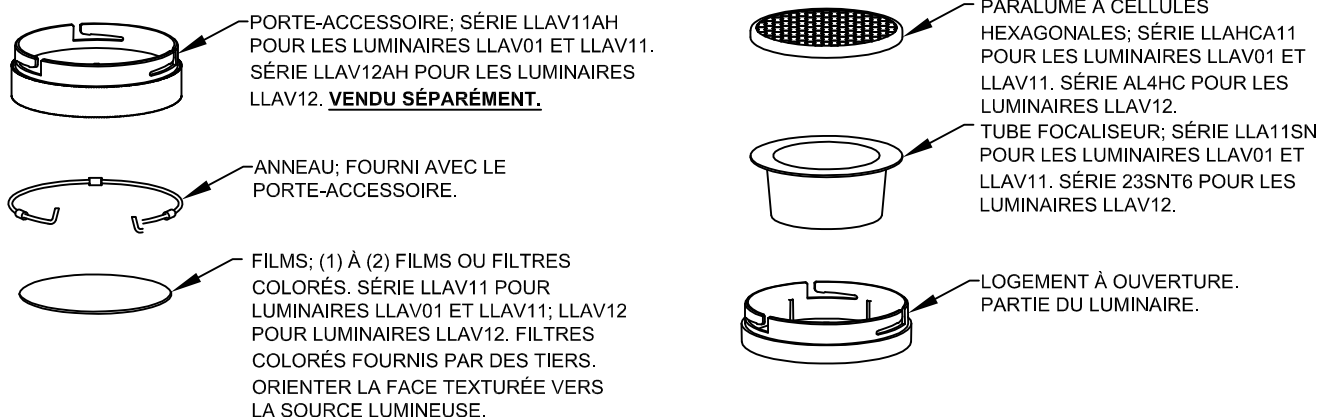

Veuillez lire attentivement et bien comprendre ces instructions avant d'installer ce luminaire. Ce luminaire est conçu pour une installation conforme au National Electrical Code (NEC) et aux règlements locaux applicables. Pour assurer la conformité aux codes et règlements locaux, vérifier auprès de l'inspecteur en électricité de votre région avant l'installation. Afin d'empêcher un choc électrique, couper l'électricité au boîtier de fusibles ou au disjoncteur avant de procéder. Veuillez conserver ces instructions comme référence d'entretien.

COMPATIBILITÉ DES PARALUME A CELLULES HEXAGONALES

COMPATIBILITÉ DES TUBE FOCALISEUR



LLAHCA11 POUR LES LUMINAIRE SÉRIE C4L15A

LLA11SN POUR LES LUMINAIRE SÉRIE C4L15A

## Installation des accessoires :

Des accessoires de la marque Lightolier d'un diamètre de 3-1/8 po et d'une épaisseur maximale de 1/4 po (pellicules, lentilles de verre, etc.) peuvent être installés sur le terrain afin de modifier la configuration du faisceau au gré de l'utilisateur.

1. D'abord retirer la section garniture (si installée), saisir le rebord du réflecteur puis le retirer vers le bas. La section garniture sera alors suspendue par le fil de retenue.
2. Dévisser le porte-accessoires et l'enlever de la section de finition comme ci-dessous. Ceci fait, appliquer une pression sur le devant du montage optique à l'aide des pouces tout en tenant toujours l'anneau à l'aide des index, puis pousser le montage optique à l'extérieur de l'anneau fileté.
3. On peut alors ajouter les accessoires à l'empilement existant ou remplacer l'optique par une autre option de la marque Lightolier. Une fois les modifications faites, réempiler et pousser le tout dans l'anneau fileté. S'assurer que l'anneau de retenue est bien ajusté au fond de l'anneau fileté.
4. Une fois le montage terminé, revisser le groupe optique dans la section de finition. Serrer jusqu'à ce que celui-ci ne puisse plus bouger. Éviter de trop serrer, ce qui pourrait compliquer un remplacement futur.
5. Réinstaller la section garniture. Se reporter au Feuille des instructions d'installation de la section garniture (C4L15A) pour les instructions complètes.

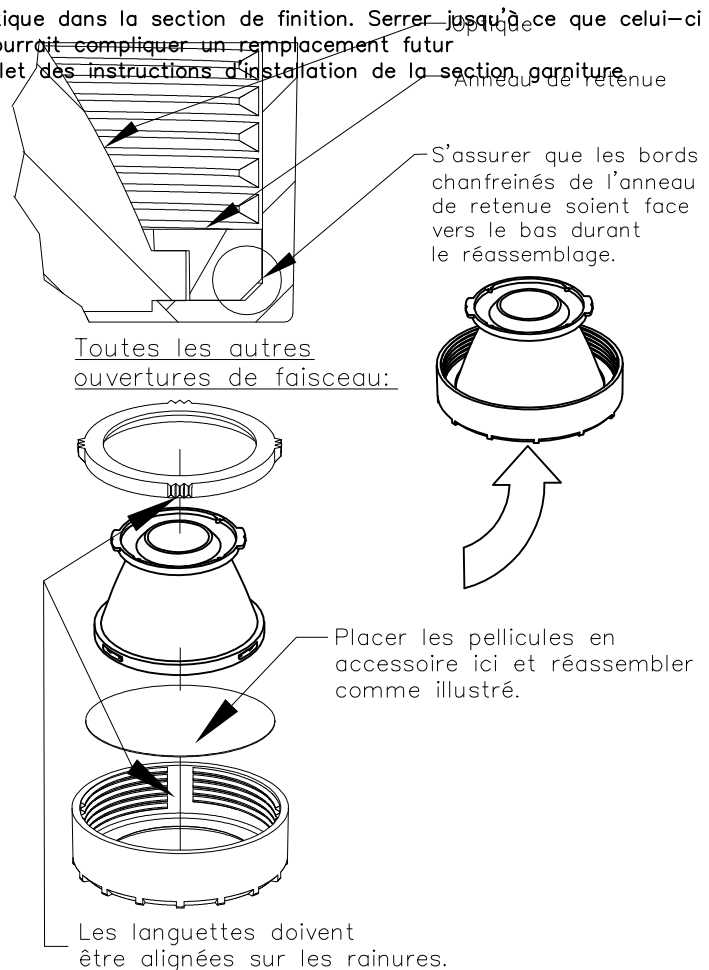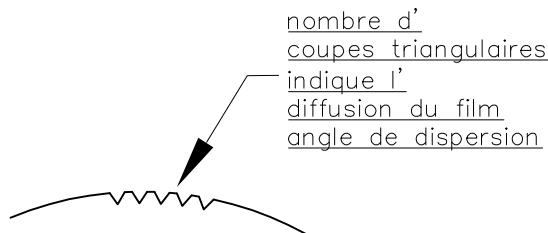

© 2016 Philips Lighting Holding B.V. All rights reserved.  
Specifications are subject to change without notice.  
[www.philips.com/luminaires](http://www.philips.com/luminaires)

Philips Lighting North America Corporation  
200 Franklin Square Drive  
Somerset, NJ 08873 USA  
Phone: 855-486-2216

Philips Lighting Canada Ltd.  
281 Hillmount Road  
Markham ON, Canada L6C 2S3  
Phone: 800-668-9008