


# PHILIPS ADVANCE

## Electrical Specifications

H-1Q26-TP-W	
Brand Name	COMPACT-HPF
Ballast Type	Magnetic
Starting Method	Pre-Heat
Lamp Connection	Series
Input Voltage	120
Input Frequency	60 HZ
Status	Active

Lamp Type	Num. of Lamps	Rated Lamp Watts	Min. Start Temp (°F/°C)	Input Current (Amps)	Starting Current (Amps)	Open Circuit (Amps)	Input Power (Watts)	Ballast Factor	MAX THD %	Power Factor
* CFM26W/GX24D	1	26	50/10	0.24	0.33	0.41	28	0.85	25	0.97
CFQ26W/G24D	1	26	50/10	0.24	0.33	0.41	28	0.83	20	0.99
CFS21W/GR10Q	1	21	25/-04	0.23	0.33	0.41	26	0.82	15	0.95
CFS28W/GR8	1	28	25/-04	0.24	0.33	0.41	28	0.80	20	0.99

## Wiring Diagram

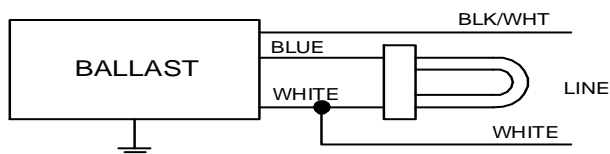

Diag. 47


The wiring diagram that appears above is for the lamp type denoted by the asterisk (\*)

## Standard Lead Length (inches)

	in.	cm.
Black		
White	15	
Blue	15	
Red		
Yellow		
Gray		
Violet		

	in.	cm.
Yellow/Blue		
Blue/White		
Brown		
Orange		
Orange/Black		
Black/White	15	
Red/White		

## Enclosure

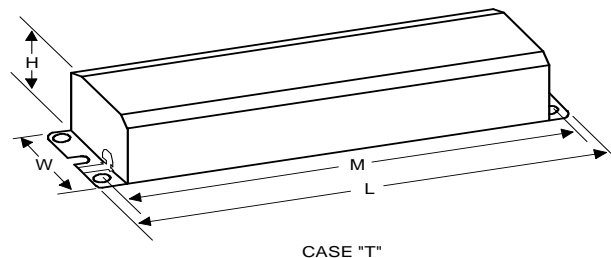

## Enclosure Dimensions

OverAll (L)	Width (std)/(TP)	Height (H)	Mounting (M)
6.5 "	2.375 "	1.5 "	6.0 "
6 1/2	2 3/8	1 1/2	6
16.5 cm	6 cm / 0 cm	3.8 cm	15.2 cm



Revised 06/29/99

Data is based upon tests performed by Philips Lighting N.A in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

## Philips Lighting Electronic N.A

10275 West Higgins Road Rosemont, IL 60018 Tel.: 800-322-2086 Fax: 888-432-1882  
Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886