



Appropriate choice for many fluorescent lamp types on the market

Standard

Available for many fluorescent lamp types sold today, including Preheat, Rapid Start, 2-pin CFL, Slimline, High Output, Very High Output and Circline. Magnetic ballasts can be used in any application where these lamps are used.

Advantages

- 60 HZ lamp operation eliminates possible EMI/RFI interference

Fonctions

- Only choice for many low volume lamp types on the market

Application


- General office, warehouses, gymnasiums, manufacturing facilities, parking garages

Standard

Versions






Schéma dimensionnel

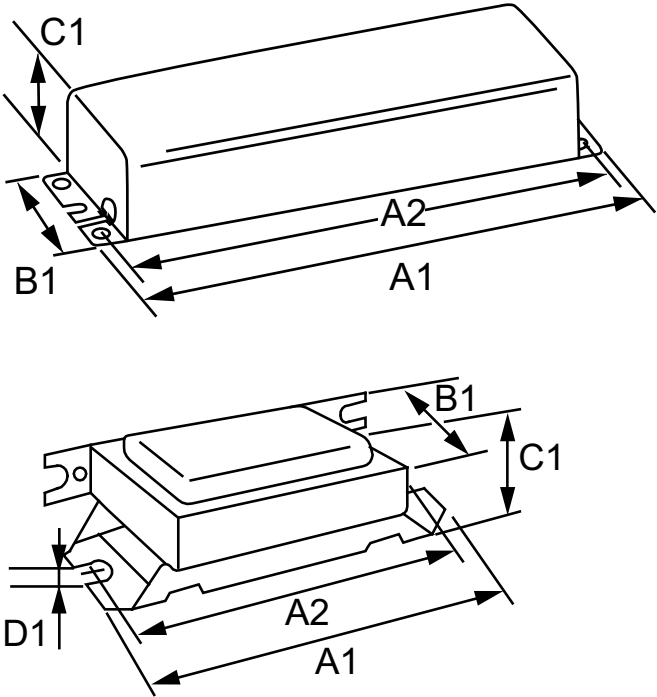

Product	A1	A2	B1	C1
STANDARD H1B13TPWI	4,25 in	3,56 in	2 in	1,44 in
STANDARD RS2S200TPI	14,31 in	13,75 in	3,19 in	2,63 in
STANDARD RC2S200TPI	14,31 in	13,75 in	3,19 in	2,63 in
STANDARD RC2S102TPI	14,31 in	13,75 in	3,19 in	2,63 in
STANDARD H2Q26TPBLSM	9,5 in	8,91 in	2,38 in	1,69 in
STANDARD VH2B13TPBLSM	4,75 in	4,38 in	2,22 in	1,63 in
STANDARD RLQ120TPM	6,5 in	6 in	1,94 in	1,38 in
STANDARD H1B9TPWM	4,25 in	3,56 in	2 in	1,44 in
STANDARD RLC5140TPWI	6,5 in	6 in	1,94 in	1,38 in

Product	A1	A2	B1	C1	D1
STANDARD LC49CTPM	3,06 in	2,75 in	1,81 in	1,59 in	0,19 in
STANDARD LC13TPI	3,06 in	2,75 in	1,81 in	1,59 in	0,19 in
STANDARD LC25TPI	3,06 in	2,75 in	1,81 in	1,59 in	0,19 in
STANDARD LC1420CM	3,06 in	2,75 in	1,81 in	1,59 in	0,19 in
STANDARD LC1420CTPM	3,06 in	2,75 in	1,81 in	1,59 in	0,19 in
STANDARD LC13TPM	3,06 in	2,75 in	1,81 in	1,59 in	0,19 in

Schéma dimensionnel

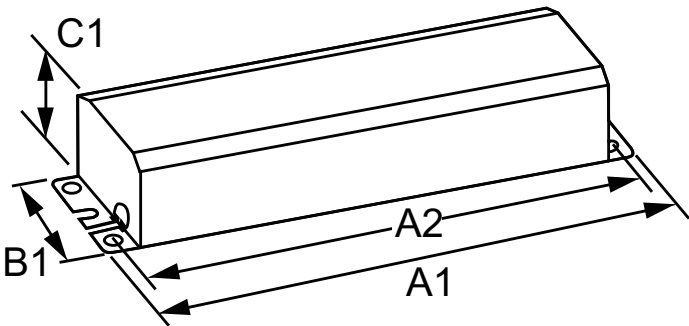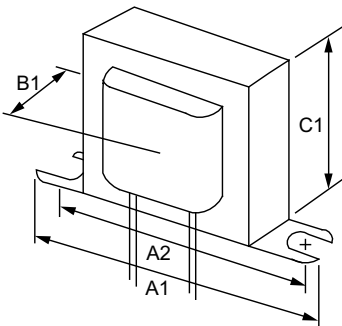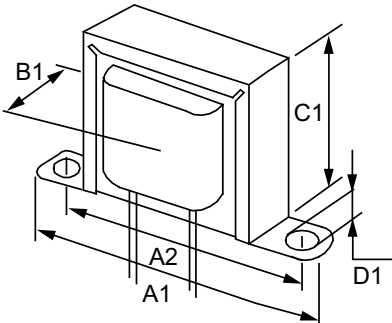

Fonctionnement et électricité	
Fréquence d'entrée	60 Hz

Fonctionnement et électricité

Order Code	Full Product Name	Tension d'entrée	Distorsion harmonique totale États-Unis
132035	STANDARD MAG BALLAST (1) FC16T9 CIRCLINE 120V	120 V	10 %
132043	STANDARD MAG BALLAST (1) FC8T9 & (1) FC12T9 120V	120 V	15 %
198549	STANDARD MAG BALLAST (1) FC12T9 & (1) FC16T9 120V	120 V	20 %

Product	A1	A2	B1	C1	D1
STANDARD LPL59TPI	2,38 in	2 in	1,59 in	1,38 in	0,19 in
STANDARD LPL59TPM	2,38 in	2 in	1,59 in	1,38 in	0,19 in
STANDARD LPL59M	2,38 in	2 in	1,59 in	1,38 in	0,19 in

Product	A1	A2	B1	C1
STANDARD LO1322M	3,06 in	2,75 in	1,44 in	1,81 in
STANDARD VLO2S13TPI	4 in	3,5 in	1,81 in	2,25 in
STANDARD LOS1Q28M	3,06 in	2,75 in	1,5 in	1,81 in
STANDARD LO1322TPM	3,06 in	2,75 in	1,44 in	1,81 in

Product	A1	A2	B1	C1
STANDARD RS3240TPWI	6,5 in	6 in	2,38 in	1,5 in
STANDARD H2B13TPBLSM	6,5 in	6 in	2,38 in	1,5 in
STANDARD H1Q26TPBLSM	6,5 in	6 in	2,38 in	1,5 in
STANDARD HM2SP20TPM	9,5 in	8,91 in	2,38 in	1,5 in
STANDARD RS2232TPWI	6,5 in	6 in	2,38 in	1,5 in

Order Code	Full Product Name	Tension d'entrée	Distorsion harmonique totale États-Unis
173930	STANDARD MAG BALLAST (1) 9W COMPACT(2-PIN) 120V	120 V	20 %
109595	STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 120V	120 V	25 %
181628	STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 120V	120 V	15 %

Standard

Order Code	Full Product Name	Tension d'entrée	Distorsion harmonique totale États-Unis
181644	STANDARD MAG BALLAST (1) F20T12 PH 120V	120 V	10 %
174177	STANDARD MAG BALLAST (1) F20T12 PH 120V	120 V	10 %
503151	STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 120V	120 V	15 %
399113	STANDARD MAG BALLAST (1) F8T5 PH 120V	120 V	15 %
120303	STANDARD MAG BALLAST (1) F25T12 PH 120V	120 V	10 %
182345	STANDARD MAG BALLAST (1) F20T12 PH 120V	120 V	10 %
398164	STANDARD MAG BALLAST (2) F20T12 PH 120V	120 V	10 %
174219	STANDARD MAG BALLAST (1) F20T12 PH 120V	120 V	15 %
174243	STANDARD MAG BALLAST (1) 28W COMPACT(2-PIN) 120V	120 V	15 %
174250	STANDARD MAG BALLAST (1) F8T5 PH 120V	120 V	10 %
174268	STANDARD MAG BALLAST (1) F8T5 PH 120V	120 V	15 %

Order Code	Full Product Name	Tension d'entrée	Distorsion harmonique totale États-Unis
198556	STANDARD MAG BALLAST (2) 13W COMPACT(2-PIN) 277V	277 V	15 %
174201	STANDARD MAG BALLAST (1) F20T12 PH 120V	120 V	10 %
113118	STANDARD MAG BALLAST (1) F8T5 PH 120V	120 V	15 %
175026	STANDARD MAG BALLAST (2) 13W COMPACT(2-PIN) 277V	277 V	35 %
504647	STANDARD MAG BALLAST (2) 13W COMPACT(2-PIN) 120V	120 V	30 %
399097	STANDARD MAG BALLAST (1) 26W COMPACT(2-PIN) 120V	120 V	25 %
508366	STANDARD MAG BALLAST (2) 26W COMPACT(2-PIN) 120V	120 V	15 %
136929	STANDARD MAG BALLAST (2) F48T12/VHO 120V	120 V	30 %
107060	STANDARD MAG BALLAST (2) F96T12/VHO 120V	120 V	20 %
136945	STANDARD MAG BALLAST (2) F96T12/VHO 120V	120 V	15 %

Renseignements généraux

Order Code	Full Product Name	Nombre de lampes	Type de lampe
132035	STANDARD MAG BALLAST (1) FC16T9 CIRCLINE 120V	1 piece/unit	FC16T9
132043	STANDARD MAG BALLAST (1) FC8T9 & (1) FC12T9 120V	2 piece/unit	FC8T9 & FC12T9
198549	STANDARD MAG BALLAST (1) FC12T9 & (1) FC16T9 120V	2 piece/unit	FC12T9 & FC16T9
173930	STANDARD MAG BALLAST (1) 9W COMPACT(2-PIN) 120V	1 piece/unit	CFQ9W/G23
109595	STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 120V	1 piece/unit	CFQ13W/GX23
181628	STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 120V	1 piece/unit	CFQ13W/GX23
181644	STANDARD MAG BALLAST (1) F20T12 PH 120V	1 piece/unit	F20T12
174177	STANDARD MAG BALLAST (1) F20T12 PH 120V	1 piece/unit	F20T12
503151	STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 120V	1 piece/unit	CFQ13W/GX23
399113	STANDARD MAG BALLAST (1) F8T5 PH 120V	1 piece/unit	CFQ9W/G23
120303	STANDARD MAG BALLAST (1) F25T12 PH 120V	1 piece/unit	F25T12

Order Code	Full Product Name	Nombre de lampes	Type de lampe
182345	STANDARD MAG BALLAST (1) F20T12 PH 120V	1 piece/unit	F20T12
398164	STANDARD MAG BALLAST (2) F20T12 PH 120V	2 piece/unit	F20T12
174219	STANDARD MAG BALLAST (1) F20T12 PH 120V	1 piece/unit	F20T12
174243	STANDARD MAG BALLAST (1) 28W COMPACT(2-PIN) 120V	1 piece/unit	CFQ27W/GX32D
174250	STANDARD MAG BALLAST (1) F8T5 PH 120V	1 piece/unit	F8T5
174268	STANDARD MAG BALLAST (1) F8T5 PH 120V	1 piece/unit	CFQ9W/G23
198556	STANDARD MAG BALLAST (2) 13W COMPACT(2-PIN) 277V	2 piece/unit	CFQ13W/GX23
174201	STANDARD MAG BALLAST (1) F20T12 PH 120V	1 piece/unit	F20T12
113118	STANDARD MAG BALLAST (1) F8T5 PH 120V	1 piece/unit	CFQ9W/G23
175026	STANDARD MAG BALLAST (2) 13W COMPACT(2-PIN) 277V	2 piece/unit	CFQ13W/GX23
504647	STANDARD MAG BALLAST (2) 13W COMPACT(2-PIN) 120V	2 piece/unit	CFQ13W/GX23

Standard

Order Code	Full Product Name	Nombre de lampes	Type de lampe
399097	STANDARD MAG BALLAST (1) 26W COMPACT(2-PIN) 120V	1 piece/unit	CFQ26W/G24D
508366	STANDARD MAG BALLAST (2) 26W COMPACT(2-PIN) 120V	2 piece/unit	CFQ26W/G24D
136929	STANDARD MAG BALLAST (2) F48T12/VHO 120V	1/2 piece/unit	F96T12/VHO

Order Code	Full Product Name	Nombre de lampes	Type de lampe
107060	STANDARD MAG BALLAST (2) F96T12/VHO 120V	1/2 piece/unit	F96T12/VHO
136945	STANDARD MAG BALLAST (2) F96T12/VHO 120V	1/2 piece/unit	F96T12/VHO

Mécanique et boîtier

Order Code	Full Product Name	Boîtier
132035	STANDARD MAG BALLAST (1) FC16T9 CIRCLINE 120V	R4
132043	STANDARD MAG BALLAST (1) FC8T9 & (1) FC12T9 120V	T1
198549	STANDARD MAG BALLAST (1) FC12T9 & (1) FC16T9 120V	T1
173930	STANDARD MAG BALLAST (1) 9W COMPACT(2-PIN) 120V	R1
109595	STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 120V	R1
181628	STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 120V	C2
181644	STANDARD MAG BALLAST (1) F20T12 PH 120V	C2
174177	STANDARD MAG BALLAST (1) F20T12 PH 120V	C2
503151	STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 120V	C2
399113	STANDARD MAG BALLAST (1) F8T5 PH 120V	C2
120303	STANDARD MAG BALLAST (1) F25T12 PH 120V	C2
182345	STANDARD MAG BALLAST (1) F20T12 PH 120V	R4
398164	STANDARD MAG BALLAST (2) F20T12 PH 120V	T2
174219	STANDARD MAG BALLAST (1) F20T12 PH 120V	X3

Order Code	Full Product Name	Boîtier
174243	STANDARD MAG BALLAST (1) 28W COMPACT(2-PIN) 120V	X6
174250	STANDARD MAG BALLAST (1) F8T5 PH 120V	X1
174268	STANDARD MAG BALLAST (1) F8T5 PH 120V	X1
198556	STANDARD MAG BALLAST (2) 13W COMPACT(2-PIN) 277V	X8
174201	STANDARD MAG BALLAST (1) F20T12 PH 120V	X3
113118	STANDARD MAG BALLAST (1) F8T5 PH 120V	X1
175026	STANDARD MAG BALLAST (2) 13W COMPACT(2-PIN) 277V	R2
504647	STANDARD MAG BALLAST (2) 13W COMPACT(2-PIN) 120V	T1
399097	STANDARD MAG BALLAST (1) 26W COMPACT(2-PIN) 120V	T1
508366	STANDARD MAG BALLAST (2) 26W COMPACT(2-PIN) 120V	R5
136929	STANDARD MAG BALLAST (2) F48T12/VHO 120V	R11
107060	STANDARD MAG BALLAST (2) F96T12/VHO 120V	R11
136945	STANDARD MAG BALLAST (2) F96T12/VHO 120V	R11

