



Iridium²

Lighting the road ahead

PHILIPS
sense and simplicity





Iridium² - Innovative road lighting solution

Iridium has been the benchmark in terms of road lighting for the past decade with best-in-class performance and timeless design. Iridium² is not a revolution but an evolution of Iridium, building on 10 years of experience and more than 1.5 million luminaires installed in the field. Iridium² will allow you to smoothly move to innovative and energy-efficient solutions such as new electronic drivers, LED, RF telemanagement and controls.

Iridium² is a family of road-lighting luminaires designed around performance and sustainability. Depending on application and budget, you are free to start with LED or electronic HID (eHID), or use a mix of both technologies with the same luminaire. Whatever the initial choice, Iridium²'s modularity allows a quick and easy upgrade of your lighting installation (LED to LED or eHID to LED) whenever you want, just by changing the light engine.

The integration of LEDGINE 2.0, together with brand-new HID optics, electronic gear and controls, meets the growing demand for energy savings. The new Iridium² HID optics have been designed to give best-in-class lighting performance with the highest flexibility in terms of application. Combined with the ease of installation and maintenance, Iridium² ensures that you will enjoy the lowest cost of ownership.

Iridium² - Highest performance without compromising on lighting quality

Iridium² CosmoPolis optic

LEDGINE 2.0 optics

Flat glass in Iridium²

Thanks to the design of the brand-new HID optics, Iridium² is reaching the physical limits, with increased spacing of up to +15% compared to the existing Iridium. This is possible thanks to the innovative concept of assembled optics. The assembly of highly reflective metal parts means that the material is not damaged and very high reflectivity is obtained. The Light Output Ratio of the optic itself has risen to 92%. This new optic is used in combination with an extra-clear flat glass in order to ensure maximum performance.


The optics have been optimized for CosmoPolis and high-pressure sodium lamps, bringing further flexibility to the Iridium² range. Glare control is achieved by lamp position adjustments (up to G6 classes).

Iridium² integrates the most efficient LED platform, LEDGINE 2.0, with optimized spacing and efficacy up to 95 lm/W at system level. This LED platform ensures that you will get unequalled energy savings.

LEDGINE 2.0 is perfectly adapted to LED road-lighting requirements. It combines the following features to give you the best Total Cost of Ownership: serviceability, upgradeability, lighting quality, multiple applications.

Iridium² is the one luminaire on the market that attains highest performance using only flat glass to preserve the dark sky (0 candela at 90° / glare control) and ensures the best maintenance factor, whatever the light source.

- PMMA extrapolated
- PMMA data from APE
- PC extrapolated
- PC data from APE
- Glass


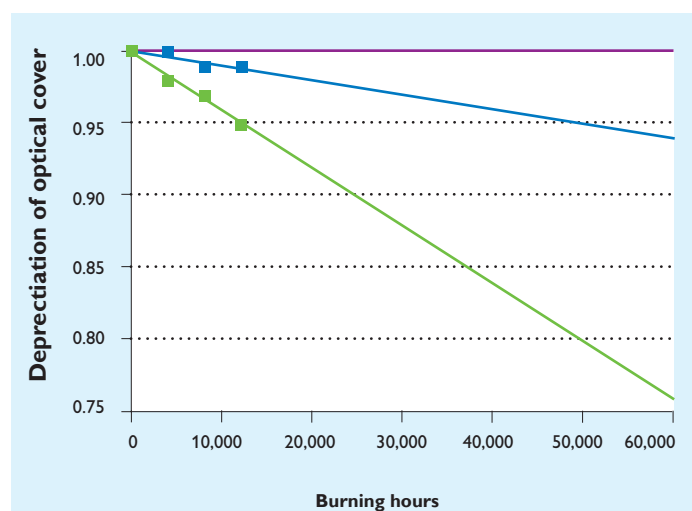


Aging of optical cover as a function of burning hours

Case study


Iridium² on application:

- Lighting class: ME3a
($\geq 1.0 \text{ cd/m}^2$)
- Carriageway: single
- Number of lanes: 2
- Adjacent pavements on each side

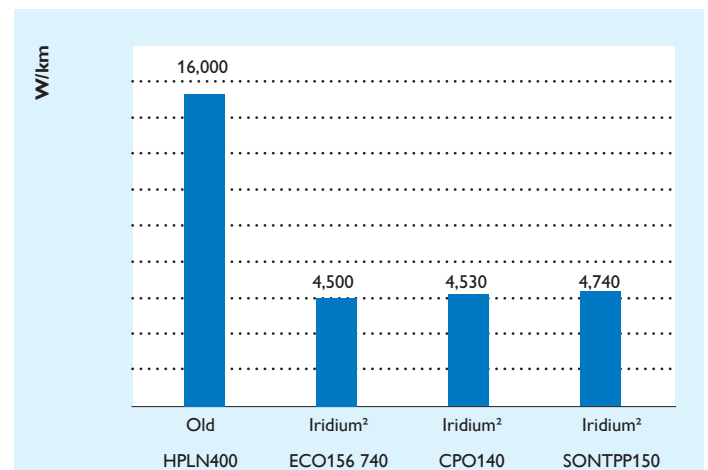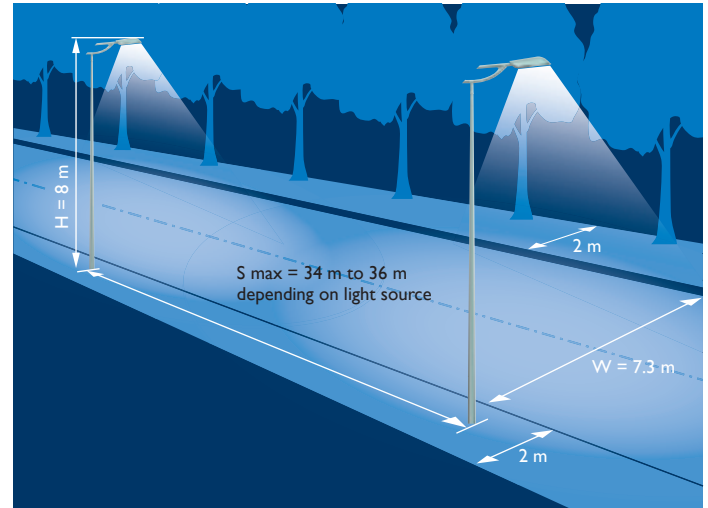


Up to 80% energy saving
over an old HPL installation

Architecture of Iridium² eHID

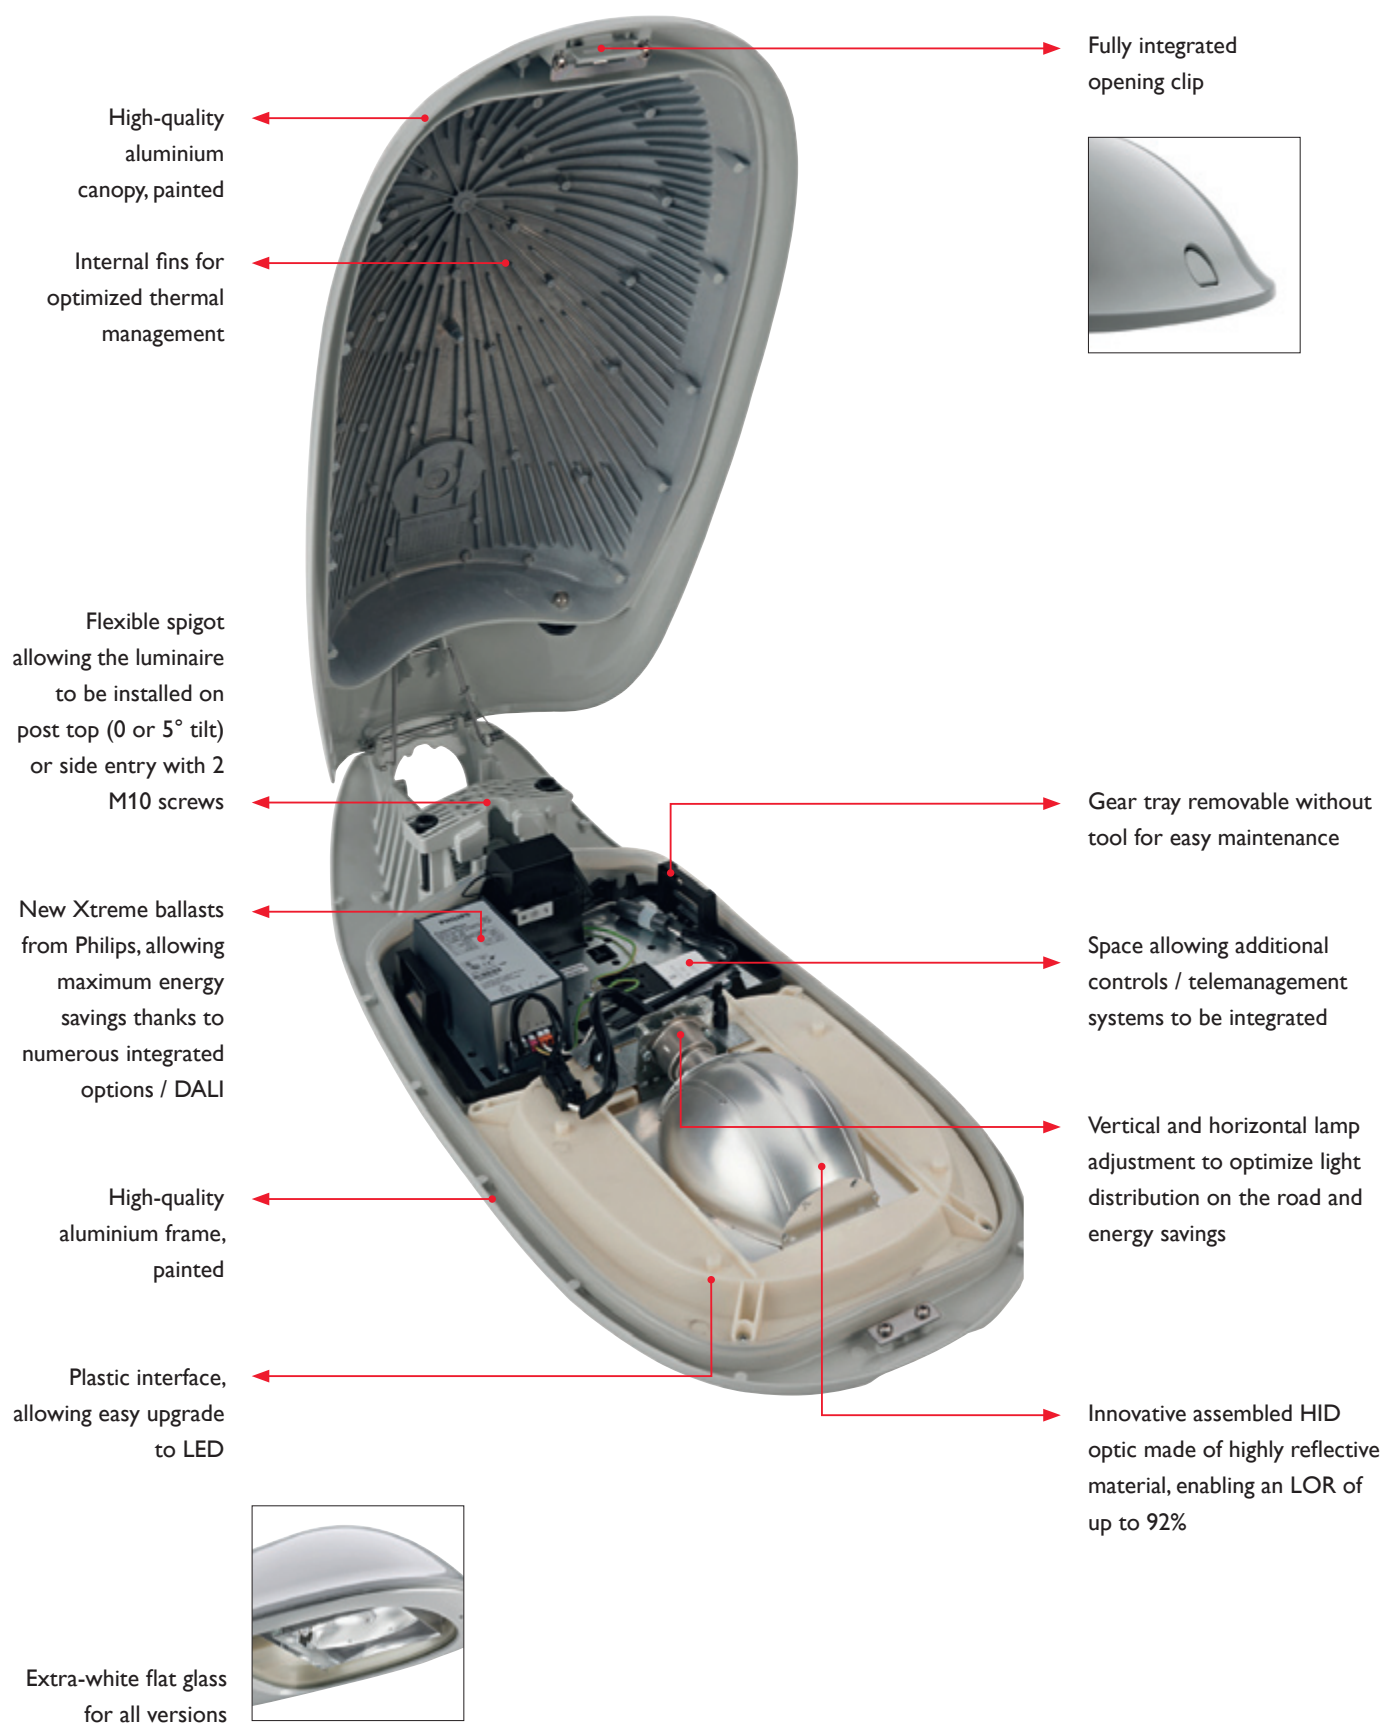


Architecture of Iridium² LED

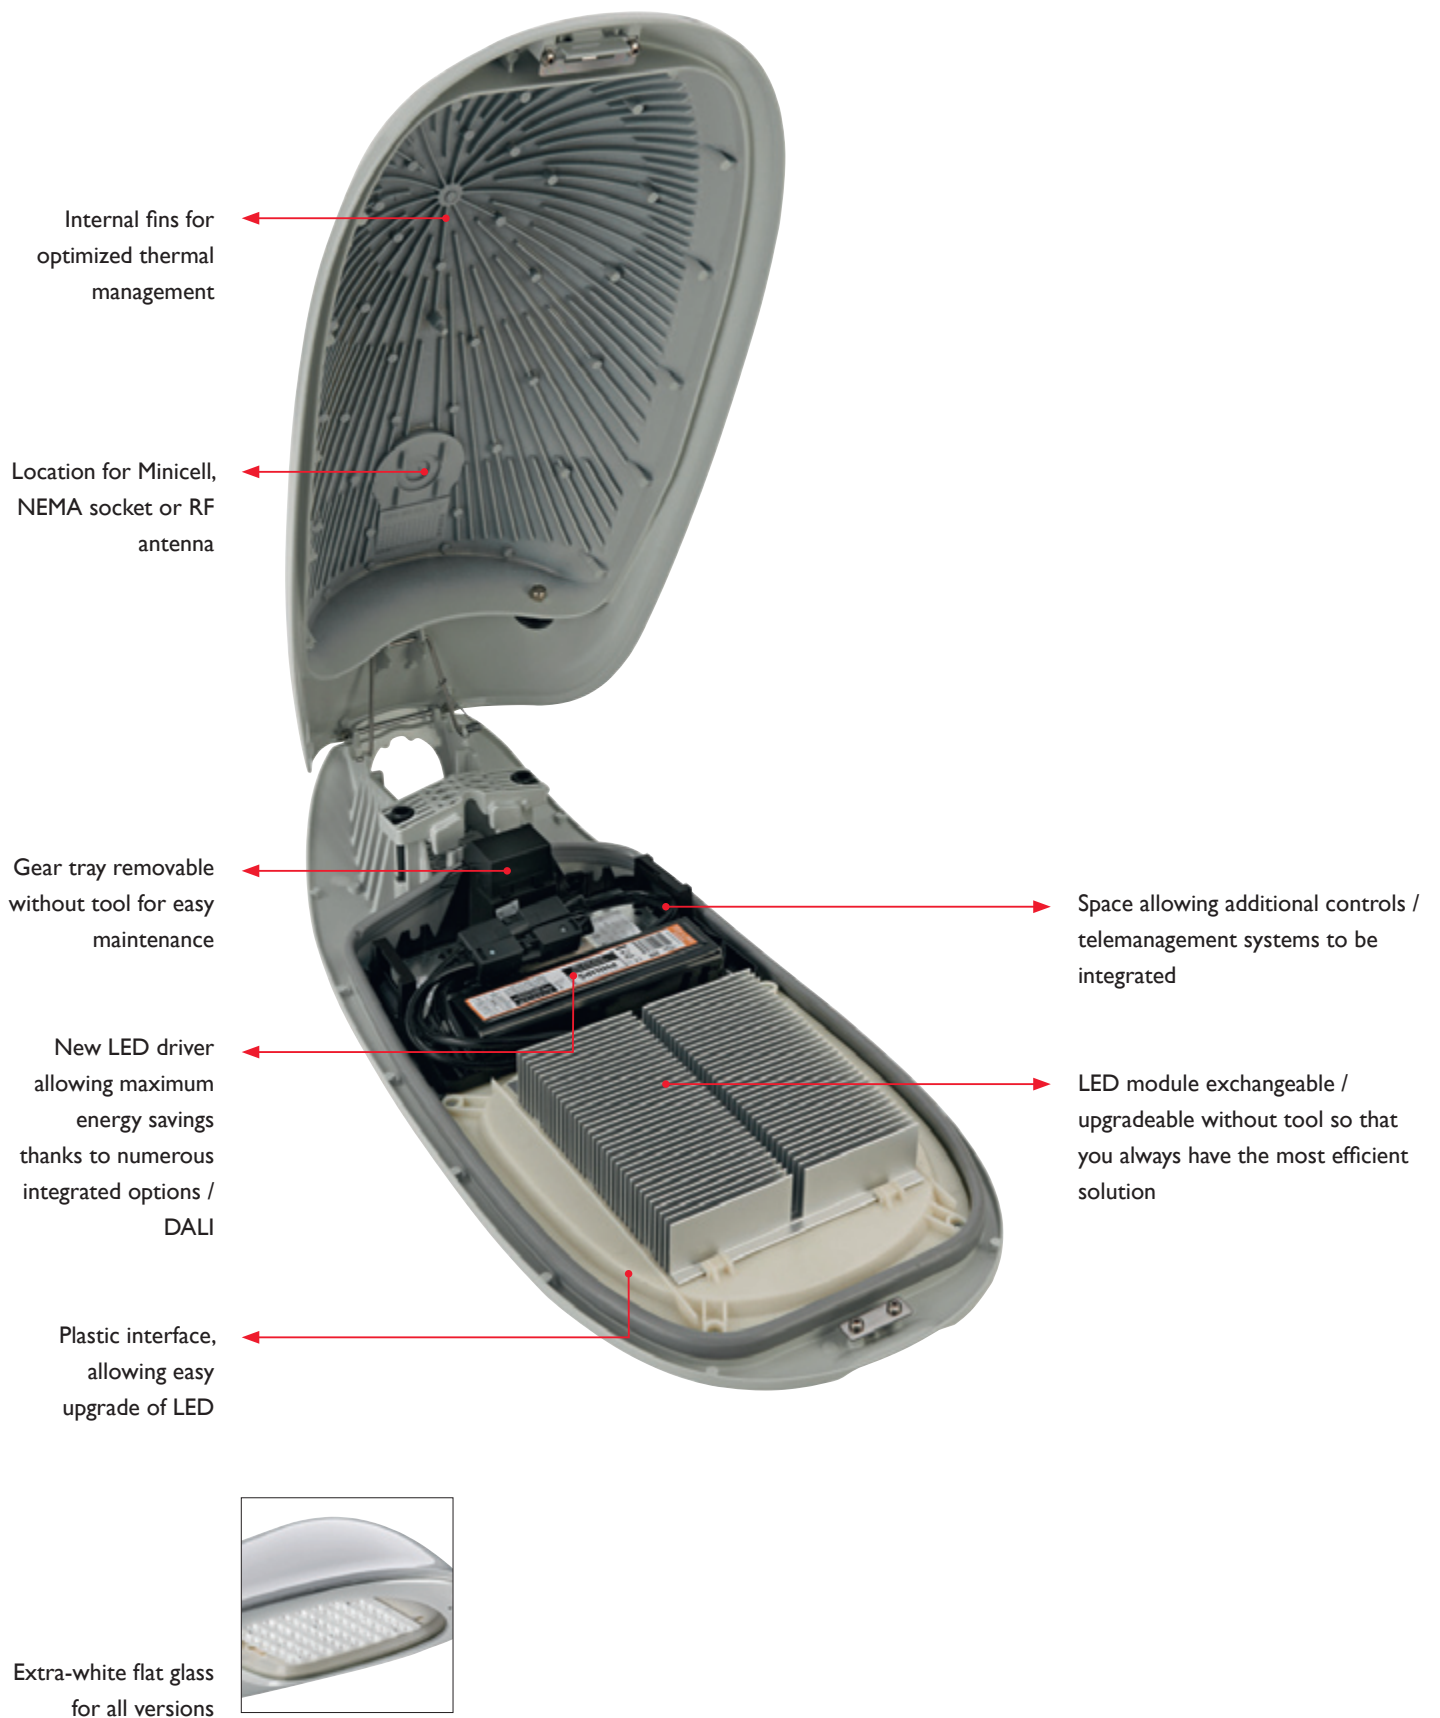


Iridium² - Future-proof luminaire

Iridium² ensures maximum energy savings thanks to its modularity. Feel free to start with an eHID version and later switch very easily to LED – in less than 3 minutes!

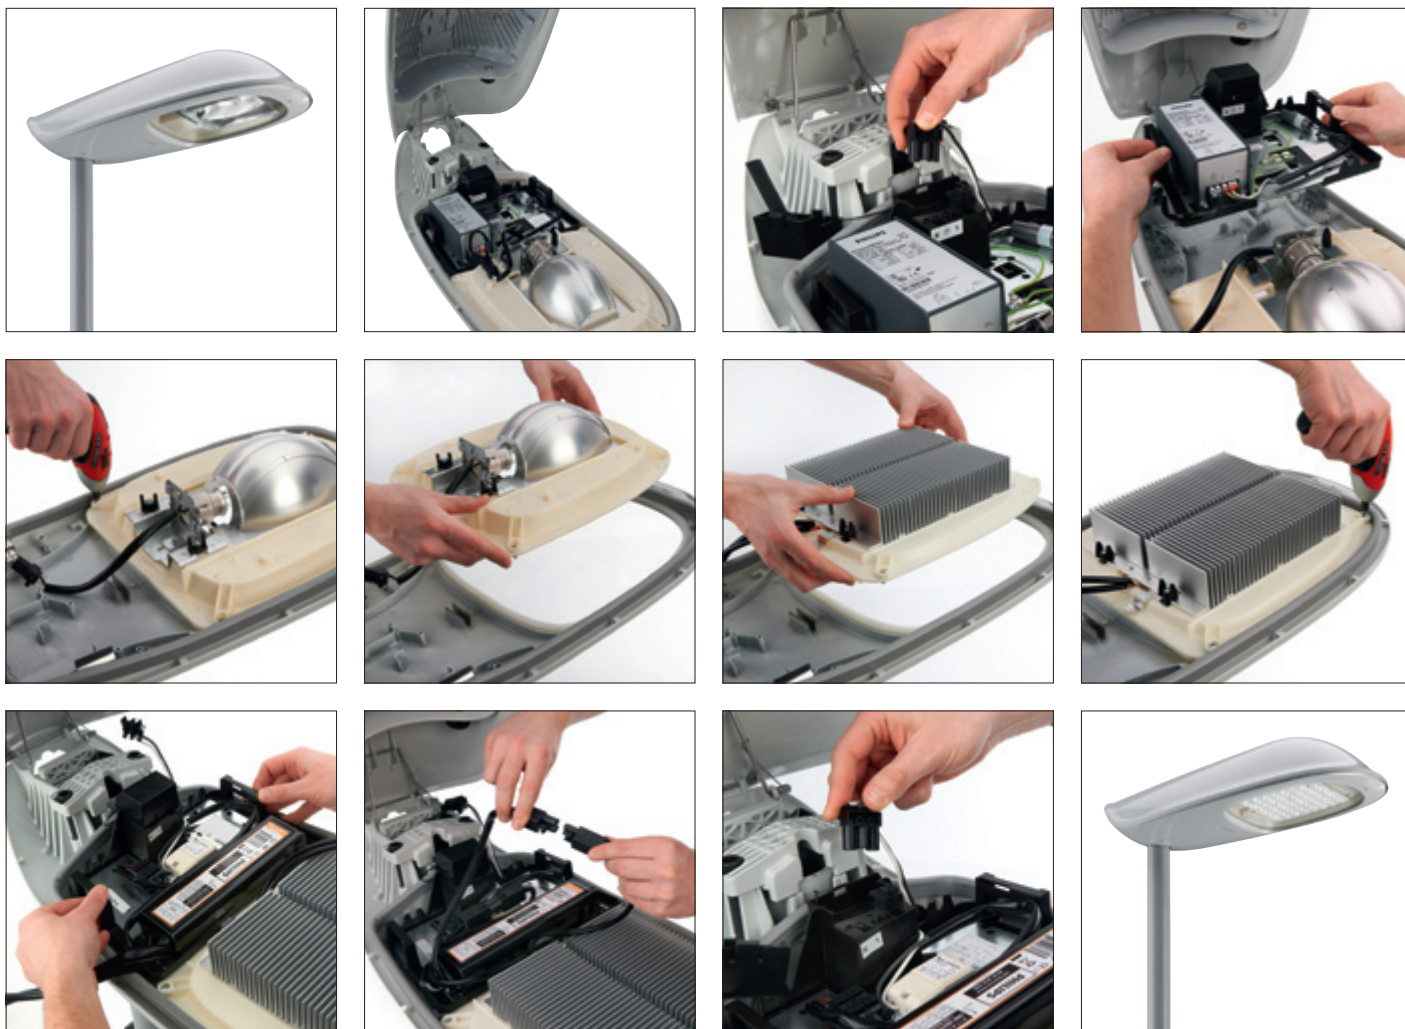

Or start with an LED version and upgrade the LED engine whenever you want – no tool required! – for further energy savings or for maintenance without having to replace the whole luminaire:

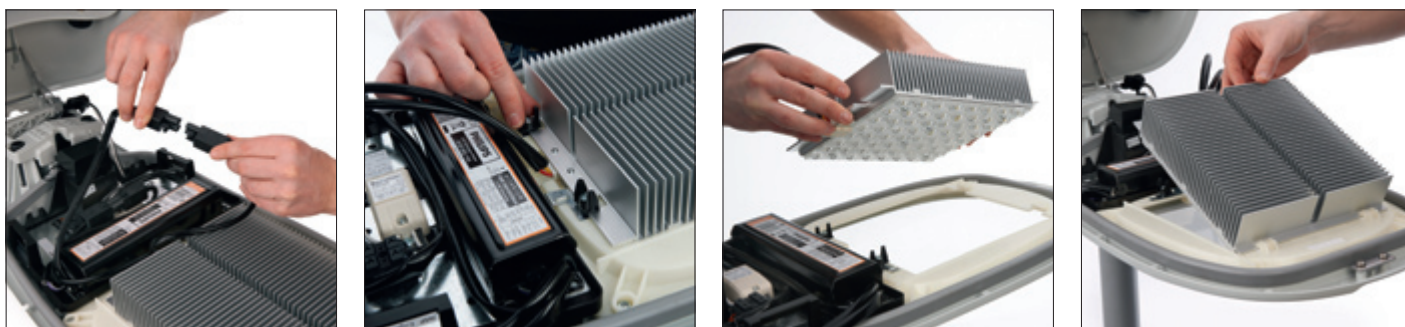


Iridium² - Maximum flexibility

Thanks to Iridium²'s family approach, the same luminaire design can be used for all projects, offering full flexibility by covering all applications, with a choice of price and technology.




Application areas covered thanks to Iridium²




1
Motorways, highways,
expressways, peripheral
motorways



2
Main roads within/
between cities



3
Mixed traffic road in city
center



3
Residential streets



4
Car parks



5
Walking, cycling and
running paths

Iridium² - Green luminaire




The end of life of the luminaire has been taken into account in the design of Iridium², enabling it to be 100% recycled. No glue is used inside the luminaire, so every part can be dismantled and recycled. Keep in mind that whenever you want, you are able to upgrade your luminaire (LED to LED or eHID to LED) and keep the complete housing of the luminaire. This greatly reduces the amount of components to be recycled.

To go one step further, we have decided to neutralize the greenhouse gas impact of Iridium² manufacturing. To achieve this, the carbon footprint of the materials used to produce Iridium² and of those used in its manufacturing and recycling phases has been assessed. This carbon footprint is then offset by financing verified and certified projects intended to reduce greenhouse gas emissions through our partner, Climate Neutral Group.

Iridium² - Sustainable luminaire thanks to new electronic drivers and LED



Xtreme driver

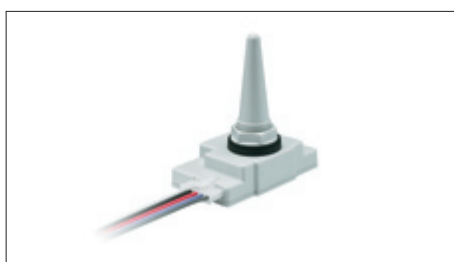


RF antenna



Telemanagement software

New Philips eHID Xtreme drivers and LED technology offer the freedom to adjust the light level of Iridium² precisely according to the application in order to maximize energy savings.

With electronic and LED technology, a fixed-output solution no longer makes sense. Very simple stand-alone control devices such as Lumistep or Dynadimmer will give you up to 20% energy savings.

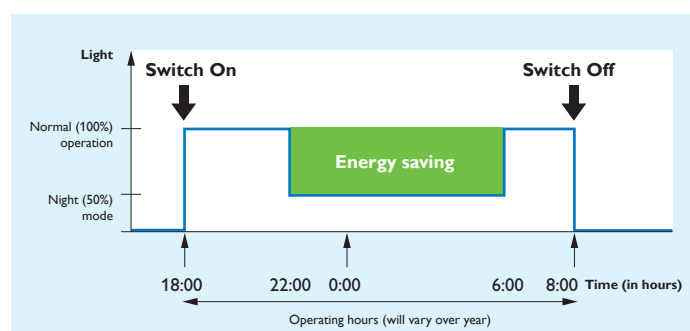

Networked control devices will improve the energy savings even further (up to 40% versus fixed output), e.g. group management systems (mains dimming, AmpLight ...) or our state-of-the-art control systems: telemanagement via RF antenna or OLC (Outdoor Luminaire Controller) in the luminaire, allowing each individual light point to be fully controlled and monitored.


Controls available in Iridium²

Control system	User benefits	Control options	User benefits	Energy saving
Networked				
 RF antenna StarSense	To fully control and monitor each individual light point	DALI	<ul style="list-style-type: none"> Global universal interface (compatibility) On/Off switching Stepless dimming Provide detailed info on lamp system 	Maximum energy savings up to 40%
 AmpLight Cabinet dimming	To provide Monitoring and control over groups of light points	Mains dimming * SDU Pilot line *	<ul style="list-style-type: none"> Simple dimming by lowering mains Simple dimming by extra control line 	Energy savings up to 25%
Stand-alone				
	To locally set the right amount of efficient light at the right place at the right time	Light level adjustment DynaDimmer LumiStep	<ul style="list-style-type: none"> Adjust the light level to the application Programmable auto dimming (5 steps) Auto dimming (1 step) 	Energy savings up to 20%

* For suitable installations only

Masts and brackets

The smooth, distinctive design of Iridium² is further enhanced when used in combination with the Iridium² mast and bracket range.

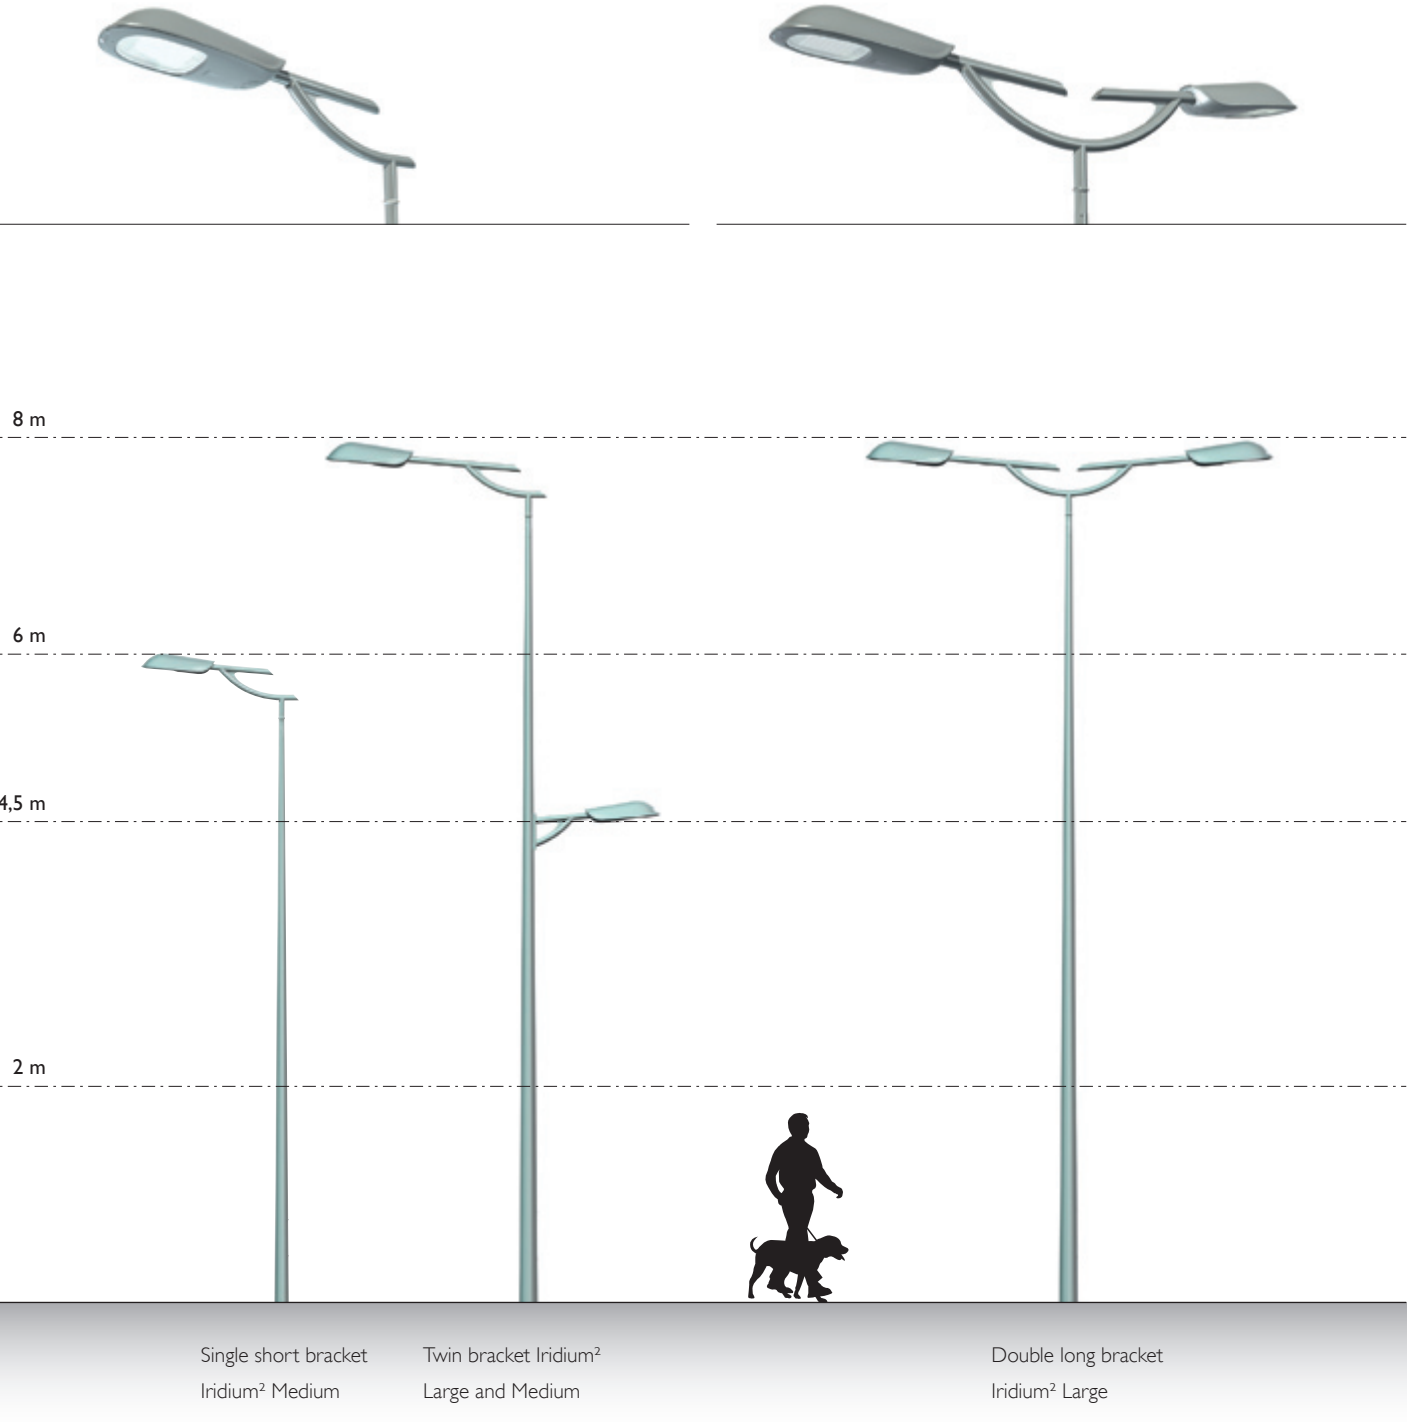


Photometry of Iridium² eHID


Thanks to new HID optics, Iridium² offers high performance and maximum flexibility in application.

Iridium² Medium


Optics	CPO-TW				SON-TTP				CDO-TT		
	45 W	60 W	90 W _æ	140 W	50 W	70 W	100 W	150 W	70 W	100 W	150 W
FX1 - CPO	•	•	•	•							
FX2 - CPO	•	•	•	•							
FX1 - SON - T					•	•	•	•			
FX2 - SON - T					•	•	•	•			
FX2 - CDO - TT									•	•	•

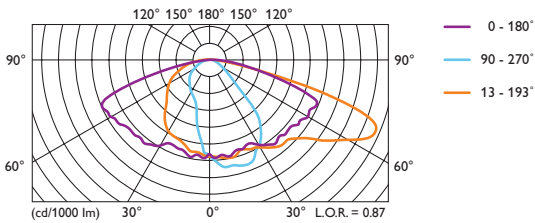

Polar intensity diagram of FX1 optic with CPO-TW 90 W

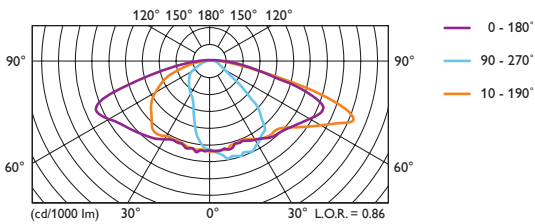


Polar intensity diagram of FX2 optic with CPO-TW 90 W

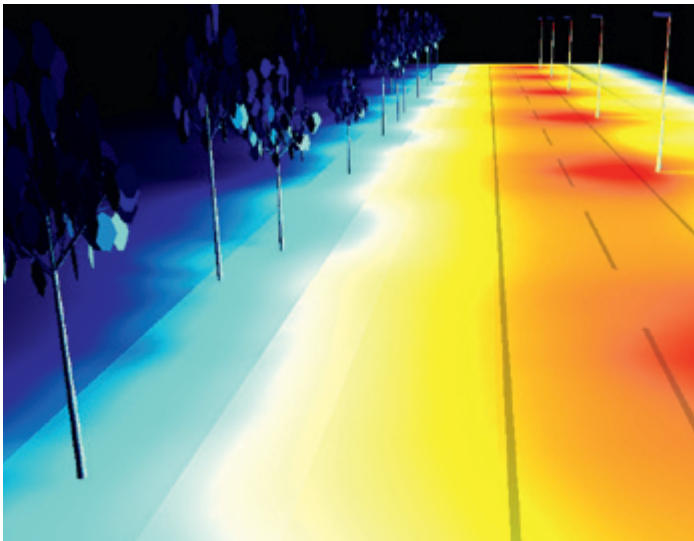

Lighting distribution of the FX1 optic with CPO-TW 90 W

Hmax/Hmedium/Hmin = Horizontal lamp position adjustment, allowing flexibility in application and the distribution to be adapted to the road.

It is strongly advised that simulations be conducted on applications with both FX1 and FX2 optics in order to obtain optimized spacings.

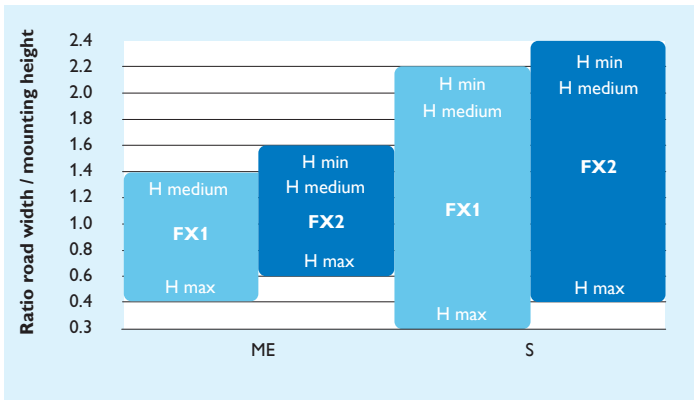


Different HID optics for different applications (CosmoPolis optics example)

Photometry of Iridium² eHID

Iridium² Large

Optics	SON-TPP		CDM-Elite	CDO-TT	
	150 W	250 W	210 W	150 W	250 W
FX1 - SON - T	•	•			
FX2 - SON - T	•	•			
FX2 - CDO - TT / CDM Elite			•	•	•

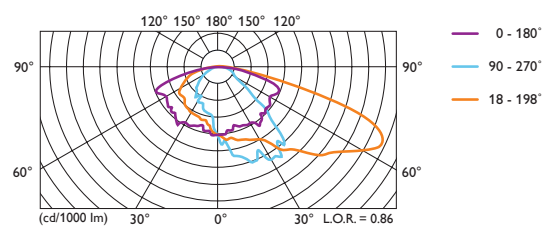


Polar intensity diagram of FX2 optic with SON-TPP 250 W


Photometry of Iridium² LED

The new LED platform LEDGINE 2.0 brings high energy savings and great flexibility to applications thanks to a wide choice of distributions.

	Iridium ² Medium	Iridium ² Large
Green line	up to 8,300 lm	up to 14,560 lm
Economy line	up to 12,072 lm	up to 21,126 lm
Light source efficacy (lm/W)	up to 124 lm/W	up to 124 lm/W
Luminaire Efficacy Rating LER (lm/W)	up to 95 lm/W	up to 95 lm/W
Lighting distribution	DN (Narrow), DM (Medium), DW (Wide), DC (Comfort), DK (Wet Road)	

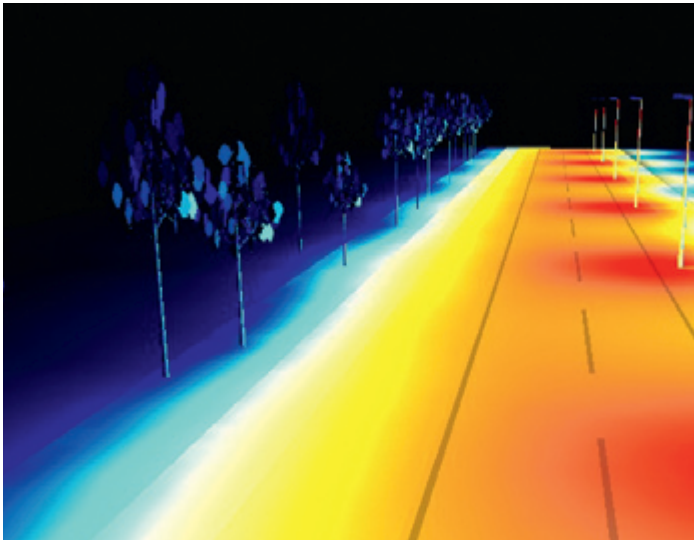

Lighting distribution of the DM optic with ECO113-S/740 configuration

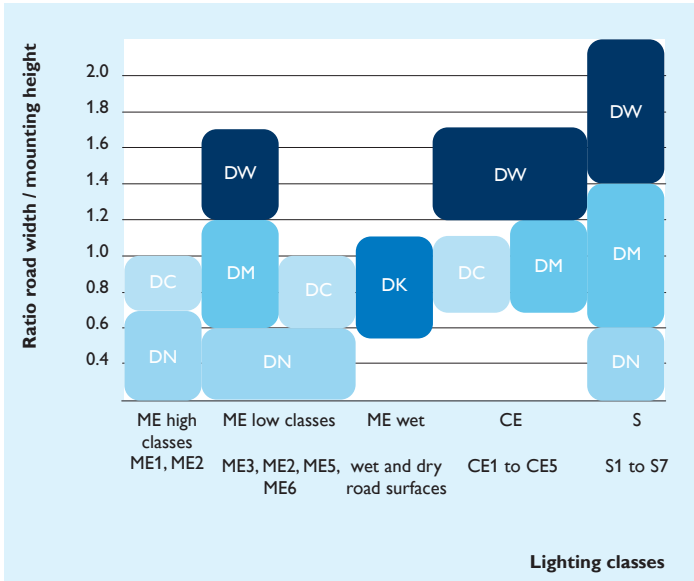

Different LED optics for different applications

Main specifications

Iridium² eHID MediumIridium² eHID LargeIridium² LED MediumIridium² LED Large





Main specifications		
IP level of the luminaire		IP66
Mechanical resistance		IK08
Nominal voltage		240 V – 50/60 Hz
Electrical class		I or II
Glass cover		Flat glass
Housing		Aluminium
Standard colour		All grey (RAL 7035)
Opening of the luminaire		From above without tool
Installation height:	Iridium ² Medium	5 to 10 m
	Iridium ² Large	8 to 15 m
Maximum weight:	Iridium ² Medium	12 kg
	Iridium ² Large	17 kg

Options
All RAL or AKZO colours
Minicell, NEMA socket
Fuses
Controls
LumiStep
DynaDimmer
Mains dimming
Light level adjustment
External dimming 1-10V / DALI
Lineswitch (via pilot line) or SDU
Telemanagement with
StarSense or RF antenna

Installation	
Post top position	0 and 5°
Post top diameter	60 and 76 mm
Side entry position	0°
Side entry diameter	48 and 60 mm
Fastening	2 M10 screws



Dimensions

Iridium² MediumIridium² Large

Contact details:
Philips Lighting
Philips Centre
Guildford Business Park
Guildford
Surrey
GU2 8XH

Tel: 0845 601 1283
Fax: 01483 575534
lighting.uk@philips.com
www.philips.co.uk/lighting



© 2011 Koninklijke Philips Electronics N.V.

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent or other industrial or intellectual property rights.

Document order number: 3222 635 69035

04/2011

Data subject to change.

www.philips.com/catalog