



Date: _____ Type: _____

Firm Name: _____

Project: _____

PDS-150e

Power / data supply for Ethernet and DMX installations



For device mounting and maintenance details, refer to the Installation Instructions included in the product packaging, or download documentation from www.colorkinetics.com/lsl/pds/pds150e/

PDS-150e is an indoor-rated power / data supply designed for LED lighting fixtures employing Chromacore® technology from Philips Color Kinetics.

the unit from operating beyond its rated temperature range. 14 pre-formed knockout holes accommodate standard conduit sizes.


PDS-150e is compatible with both Ethernet and DMX controllers.

Compatible Fixtures

PDS-150e delivers 150 watts of total output via six output terminals and accommodates input voltages ranging from 100 VAC to 240 VAC. Short-circuit protection prevents device failure due to incorrectly wired fixtures.


Fixture	Max. Quantity Per PDS-150e	Max. Quantity Per Fuse Group
C-Splash™ 2	6	2
ColorBlast® 12	3	1
ColorBlast® 6	6	2
ColorBurst® 6	6	2

The PDS-150e enclosure is designed for use in dry locations. The built-in cooling fan and over-temperature protection circuitry prevent




PDS-150e wiring diagrams are available online at www.colorkinetics.com/support/wiring/

DMX Configuration

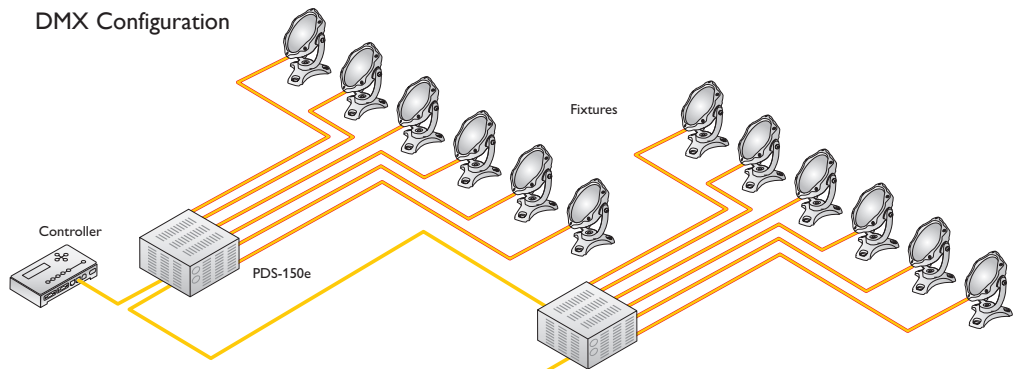

Ethernet Configuration

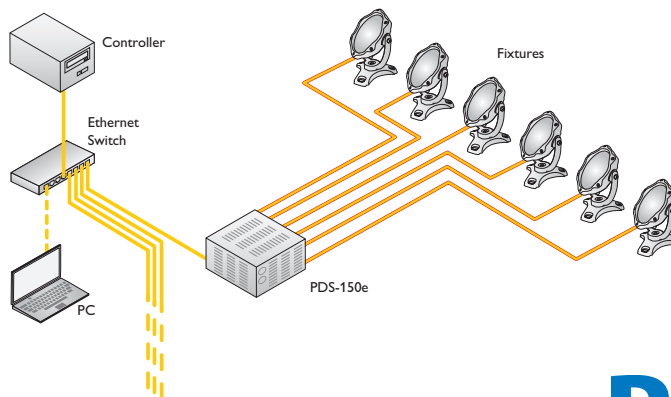



PHILIPS

Specifications


Due to continuous improvements and innovations, specifications may change without notice.

Item	Specification	Details	
Electrical	Input Voltage	100 – 240 VAC, auto-switching, 50 / 60 Hz	
	Maximum Input Current	2.8 A at 115 VAC, 1.4 A at 230 VAC	
	Power Output	24 VDC, 150 W maximum	
Physical	Dimensions (Height x Width x Depth)	4.4 x 10.4 x 10.1 in (112 x 264 x 257 mm)	
	Weight	8 lb (3.6 kg)	
	Construction	Painted steel housing, surface mount design	
	Finish	Black matte	
	Connectors	Data	RJ-45 input and output connectors
		Power Output	(6) terminal blocks
		Power Input	Terminal block
	Temperature Ranges	14° – 122° F (-10° – 50° C) Operating 14° – 122° F (-10° – 50° C) Startup -40° – 176° F (-40° – 80° C) Storage	
	Humidity	0 – 95%, non-condensing	
	Cooling	Cooling fan	
	Airflow	Rear panel input, side panel output	
Heat Dissipation	25% of total power input at maximum load		
Data Input	Philips full range of controllers, third-party DMX controllers, or KiNET-compatible* third-party Ethernet controllers		
Certification and Safety	Certification	UL / cUL, CE, PSE	
	Classification	UL Class 2 power supply	
	Environment	Dry Location, IP20	

* KiNET™ is the Ethernet lighting protocol from Philips Color Kinetics.

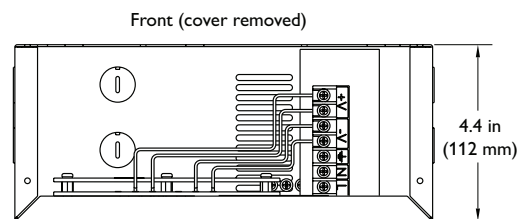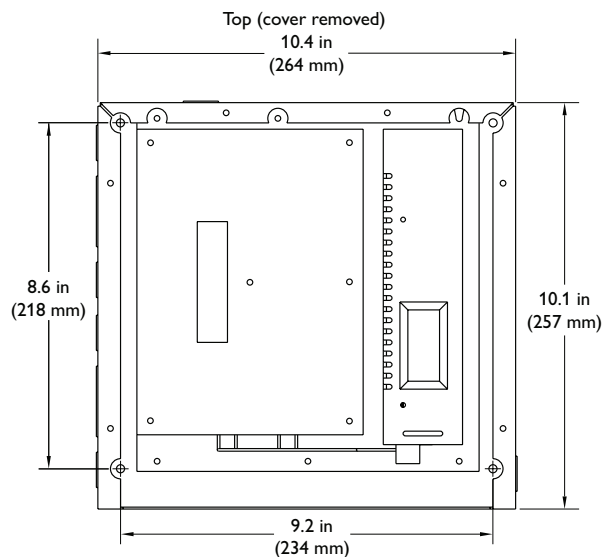


Side, showing conduit knockout holes

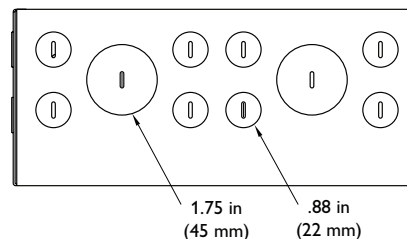

Ordering Information

Item	Included Components	Item Number	Philips 12NC
PDS-150e	Power / data supply module, housing with cover and attaching screws, connectors, and Installation Instructions	109-000008-01	910503700092

Use Item Number when ordering in North America.

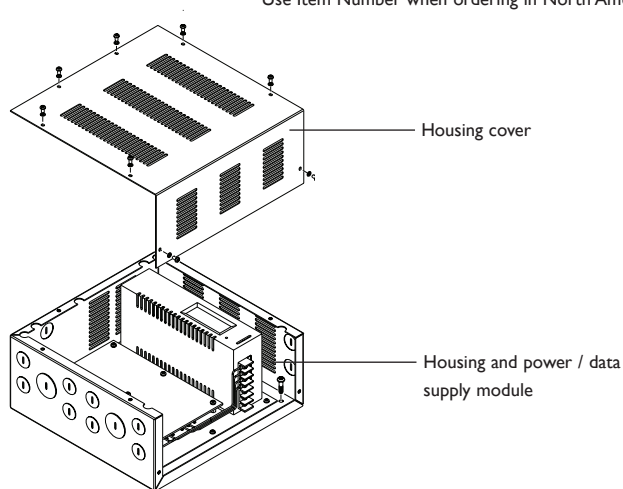

For complete instructions detailing how to address fixtures connected to a PDS-150e, refer to the *Addressing and Configuration Guide* available online at www.colorkinetics.com/support/addressing/



Philips Color Kinetics
3 Burlington Woods Drive
Burlington, Massachusetts 01803 USA
Tel 888.385.5742
Tel 617.423.9999
Fax 617.423.9998
www.philipscolorkinetics.com

Copyright © 2009 – 2010 Philips Solid-State Lighting Solutions, Inc. All rights reserved. Chromacore, Chromasic, CK, the CK logo, Color Kinetics, the Color Kinetics logo, ColorBlast, ColorBlaze, ColorBurst, eW Fuse, ColorGraze, ColorPlay, ColorReach, iW Reach, eW Reach, DIMand, EssentialWhite, eW, iColor, iColor Cove, IntelliWhite, iW, iPlayer, Optibin, and Powercore are either registered trademarks or trademarks of Philips Solid-State Lighting Solutions, Inc. in the United States and / or other countries. All other brand or product names are trademarks or registered trademarks of their respective owners. Due to continuous improvements and innovations, specifications may change without notice. DAS-000058-01 R01 12-10