



# MASTER MHN-LA

## MASTER MHN-LA 2000W/842 400V XWH

Compact quartz metal halide lamps with double-pin

### Product data

General Information	
Cap base	X528 [ X528]
Burning Position	P5 [ Parallel +/-5D or Horizontal(HOR)]
Life to 5% failures (nom.)	4500 h
Life to 10% failures (nom.)	6000 h
Life to 20% failures (nom.)	8500 h
Life to 50% failures (nom.)	13000 h
Light Technical	
Colour Code	842 [ CCT of 4,200 K]
Lamp Luminous Flux (Min)	193000 lm
Lamp Luminous Flux (Nom)	214000 lm
Colour Designation	Cool White (CW)
Lumen maintenance 1,000 hours (nom.)	94 %
Lumen maintenance 10,000 hours (nom.)	63 %
Lumen maintenance 2,000 hours (nom.)	89 %
Lumen maintenance 5,000 hours (nom.)	76 %
Chromaticity coordinate X (nom.)	370
Chromaticity coordinate Y (nom.)	370
Colour Temperature, horizontal (Nom)	4200 K
Lamp Luminous Efficacy EM (Nom)	105 lm/W
Colour Rendering Index,horiz (Nom)	72
Operating and Electrical	
Lamp supply voltage	400 V [ 400]
Power (Rated) (Nom)	2040.0 W

Lamp current run-up (max.)	15 A
Lamp current (EM) (nom.)	9.6 A
Ignition supply voltage (min.)	342 V
Voltage (Max)	245 V
Voltage (Min)	220 V
Voltage (Nom)	235 V
Controls and Dimming	
Dimmable	no
Mechanical and Housing	
Bulb finish	Clear (CL)
Cap base information	Cable (C)
Approval and Application	
Energy efficiency label (EEL)	A+
Mercury (Hg) content (nom.)	194 mg
Energy Consumption kWh/1000 h	2244 kWh
UV	
Specific eff. radiant power	280 mW/klm
Luminaire Design Requirements	
Bulb temperature (max.)	920 °C
Pinch temperature (max.)	350 °C

# MASTER MHN-LA


Product Data	
Full product code	871150020074700
Order product name	MASTER MHN-LA 2000W/842 400V XWH
EAN/UPC – product	8718291548201
Order code	928071305130
Local Code	MHNLA2000W400V
Numerator – quantity per pack	1

Numerator – packs per outer box	1
Material no. (12NC)	928071305130
Net weight (piece)	172.000 g
ILCOS Code	MN-2000-E-K-/H

## Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


## Dimensional drawing

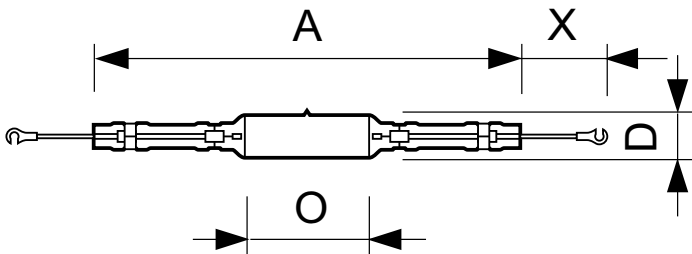

Product	D (max)	O	X	A
MASTER MHN-LA 2000W/842 400V XWH	40 mm	108 mm	58 mm	353 mm

## MHN-LA 2000W/842 400V XWH

## Photometric data

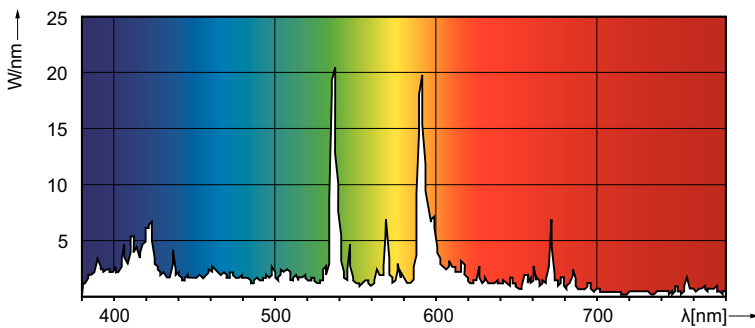

# MASTER MHN-LA

## Lifetime

