




Installation instructions

Instructions de montage
Montageanleitung
Montage instructie
Istruzioni di montaggio

Instrucciones de montaje
Instruções de montagem
Monteringsinstruktioner
Monteringsvejledning




Kokoonpano- ja kiinnitysohjeet
Montaj yönergesi
Οδηγός συναρμολόγησης
Instrukcja montażu

Szerelési utasítások
Návod k montáži
ИНСТРУКЦИЯ ПО МОНТАЖУ
Návod k montáži



				A	B	C	850°	960°		
Compact 175	FBS261	PL-C/2P G24d	13-18-26W	175	194	127		✓		
		PL-C/4P G24q								
		PL-T GX24q								
	FBS263	PL-C/2P G24d	13-18W				✓			
		PL-C/4P G24q								
Performance 225	FBS270	PL-C/2P G24d	18-26W	225	244	192		✓		
		PL-C/4P G24q								
		PL-T GX24q								
	FBS271	PL-C/2P G24d	18-26W				135		✓	
		PL-C/4P G24q								
		PL-T GX24q								
	FBS273	PL-C/2P G24d	18-26W			✓				
		PL-C/4P G24q								
Power 275	FBS280	PL-C/2P G24d	26W	275	294	203		✓		
		PL-C/4P G24q								
		PL-T GX24q4								
		PL-T GX24q5								
	KBS280	QL	55W							
			85W							

Installation

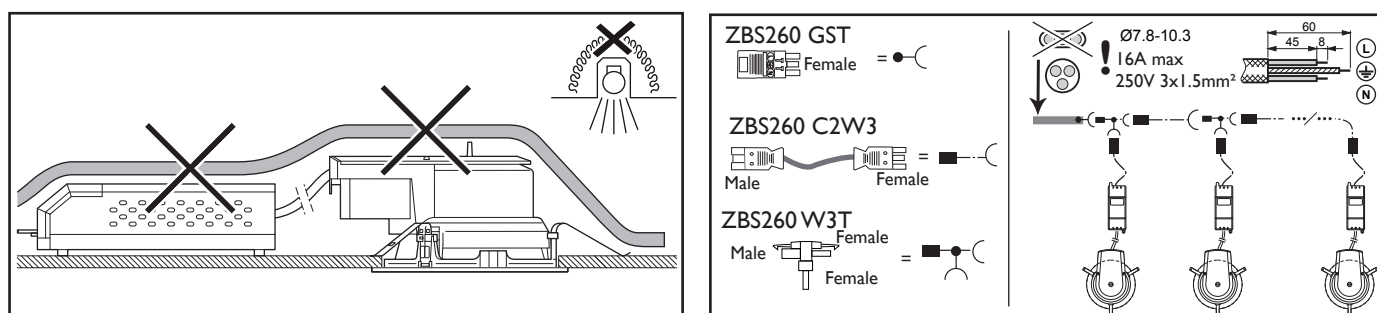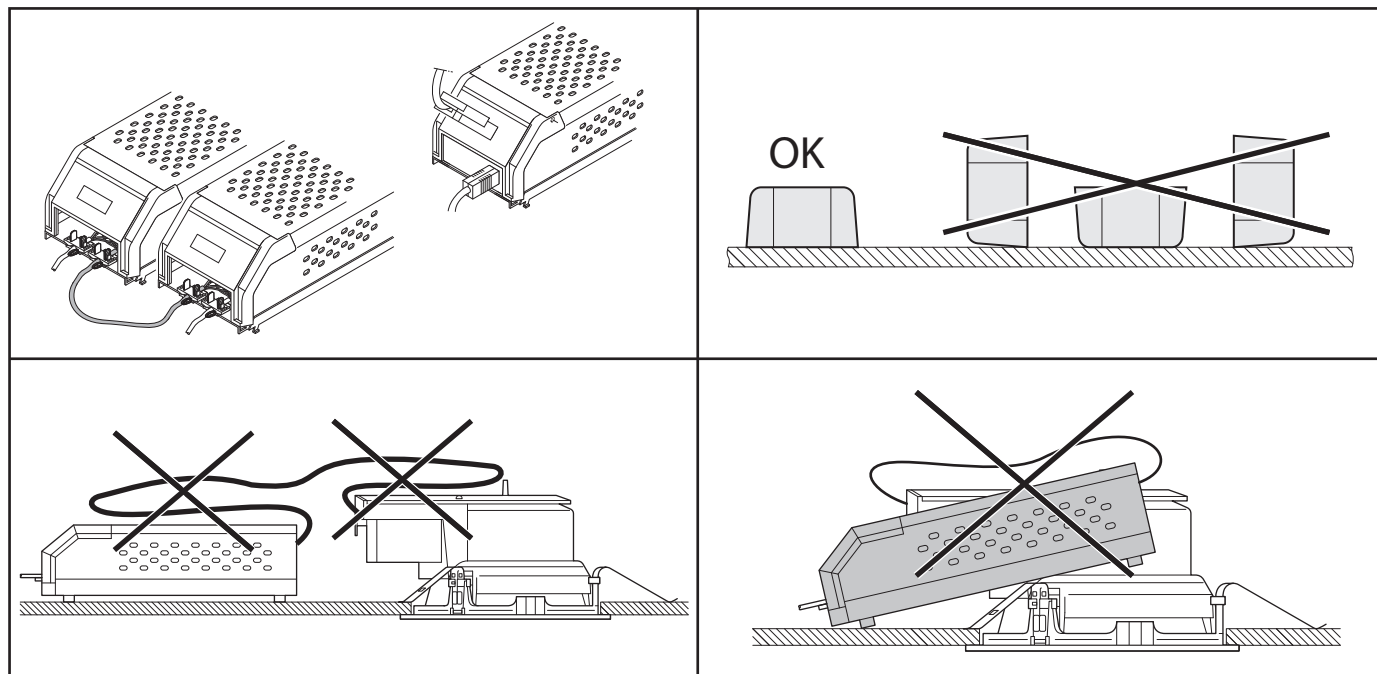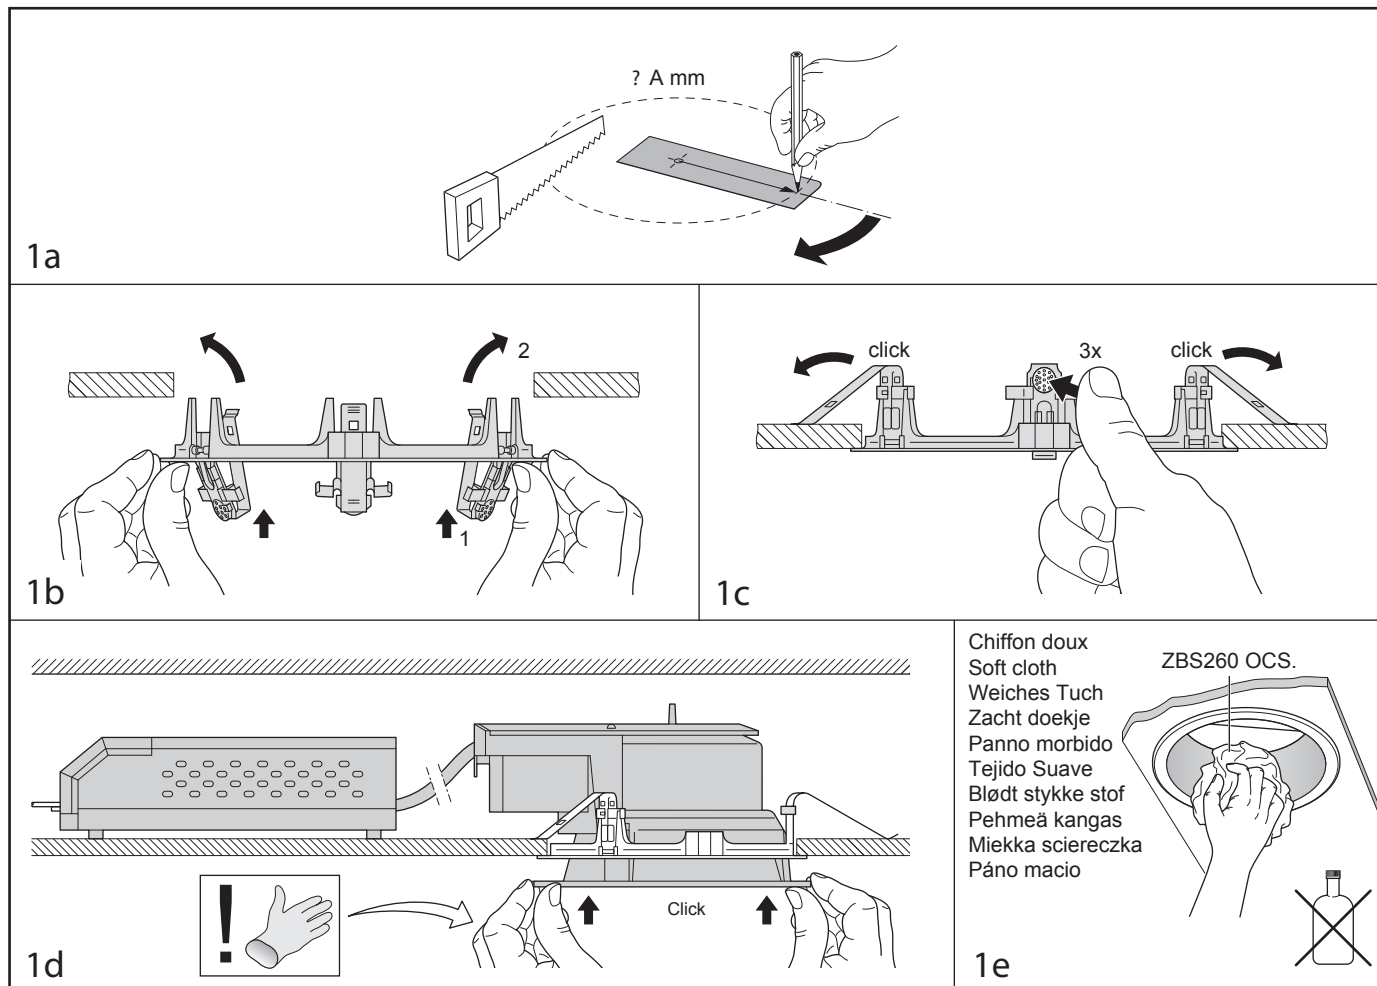

											
			IC	HFP	HFR/HFD				IC	HFP	HFR/HFD
Compact 175	FBS261	PL-C/2P G24d	1/3			Performance 225	FBS270	PL-C/2P G24d	1/3		
		PL-C/4P G24q		1/2-3	4/5-6			PL-C/4P G24q		1/2-3	4/5-6
		PL-T GX24q		1/2-3				PL-T GX24q		1/2-3	
Power 275	FBS263	PL-C/2P G24d	1/3			Performance 225	FBS271	PL-C/2P G24d	1/3		
		PL-C/4P G24q		1/2-3	4/5-6			PL-C/4P G24q		1/2-3	4/5-6
		PL-T GX24q4		1/2-3				PL-T GX24q		1/2-3	
		PL-T GX24q5		1/2-3				PL-C/2P G24d	1/3		
		PL-C/4P G24q	1/3					PL-C/4P G24q		1/2-3	4/5-6
						Power 275	KBS280	QL		1/2-3	

1

Ø7.8-10.3

60
45 8

L
N

ZBS260 GST
Or Wieland
GST18i3B

2

Miniature Circuit Breaker (MCB type)		Relative quantity of luminaires
B	16A	100% (see table beside)
B	10A	63%
C	16A	170%
C	10A	104%

Lamp	Max. qty per MCB type B 16A	Inrush current 1/2 value time
HFP 113 PL-C	27	20A/170µs
HFP 213 PL-C	27	20A/170µs
HFP 118 PL-C	27	20A/170µs
HFP 218 PL-C	27	27A/250µs
HFP 126 PL-C	27	20A/170µs
HFP 226 PL-C	27	27A/250µs
HFP 326 PL-C	10	31A/390µs

Lamp	Max. qty per MCB type B 16A	Inrush current 1/2 value time
HFP 132 PL-T	27	20A/170µs
HFP 232 PL-T	11	45A/400µs
HFP 142 PL-T	27	20A/170µs
HFP 242 PL-T	11	45A/400µs
HFP 257 PL-T	11	45A/400µs
QL 55 HF	8	45A/350µs
QL 85 HF	8	45A/350µs

3a

45
30 8

L
N

Ø6-13

3b

3c

3d

4

60
45 8

Ø7.8-10.3

L
N

23 9

2x0.75²max

+ / DA / Ls
- / DA / N

Ø5.5-6.5

6

Inrush current	Max. qty per MCB type B 16A	Inrush current 1/2 value time
HFR 118 PL-T/C	28	40A/110µs
HFR 218 PL-T/C	28	35A/120µs
HFR 126 PL-T/C	28	27A/250µs
HFR 226 PL-T/C	12	45A/350µs
HFR 326 PL-C	14	35A/360µs
HFR 132 PL-T	28	27A/250µs
HFR 232 PL-T	12	45A/350µs
HFR 142 PL-T	28	27A/250µs
HFR 242 PL-T	12	45A/350µs
HFR-TD 118 PL-T/C EII	28	40A/110µs
HFR-TD 126-42 PL-T/C EII	28	40A/120µs
HFR-TD 218 PL-T/C EII	28	40A/110µs
HFR-TD 226-42 PL-T/C EII	28	35A/120µs

Miniature Circuit Breaker (MCB type)		Relative quantity of luminaires	
		HFR 118/218 HFR-TD	HFR 126/132/142 HFR 226/232/242
B	16A	100%	100%
B	10A	63%	63%
C	16A	170%	170%
C	10A	108%	104%

5

15 8

2x0.75²max


+ / DA / Ls
- / DA / N

Ø4-8

45
30 8

L
N

Ø6-13

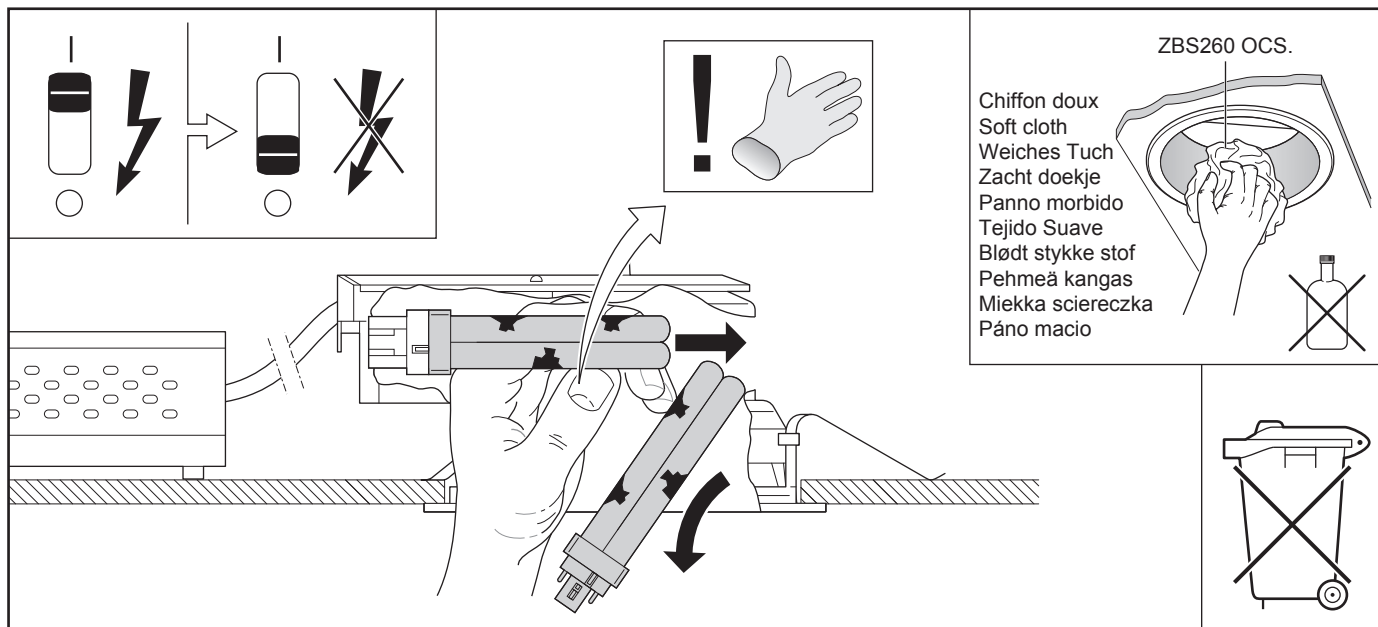

Removal

