


# PHILIPS ADVANCE

Metal  
Halide  
Lamp Ballast

Catalog Number 72C5882  
For 320W M132/M154 (P.S.)  
60 Hz CWA  
Status: Active

## DIMENSIONS AND DATA

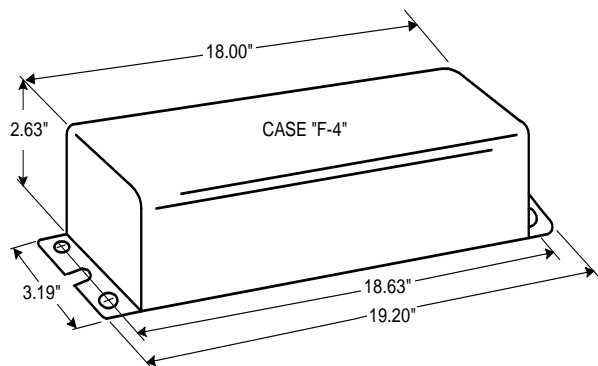

INPUT VOLTS	120	277			
CIRCUIT TYPE	CWA				
POWER FACTOR (min)	90%				
REGULATION					
Line Volts	±10%				
Lamp Watts	±10%				
LINE CURRENT (Amps)					
Operating.....	3.35	1.46			
Open Circuit.....	1.60	0.70			
Starting.....	2.75	1.20			
UL TEMPERATURE RATINGS					
Insulation Class	A (105°C)				
Coil Temperature Code	1029				
MIN. AMBIENT STARTING TEMP.	-20°F or -30°C				
NOM. OPEN CIRCUIT VOLTAGE	270				
INPUT VOLTAGE AT LAMP DROPOUT.....	65	160			
INPUT WATTS	370				
RECOMMENDED FUSE (Amps).....	8	3			
CORE and COIL					
Dimension (A)					
Dimension (B)					
Weight (lbs.)	21.3				
Lead Lengths	12"				
CAPACITOR REQUIREMENT					
Microfarads					
Volts (min.)					
Fault Current Withstand (amps)					
60 Hz TEST PROCEDURES (Refer to Advance Test Procedure for HID Ballasts - Form 1270)					
High Potential Test (Volts)					
1 minute	1500				
2 seconds	2500				
Open Circuit Voltage Test (Volts)	245-300				
Short-Circuit Current Test (Amps)					
Secondary Current	2.70-3.40				
Input Current.....	2.10-3.15	0.90-1.40	-	-	-


Capacitor:

The capacitor is included as part of the potted assembly.



### Wiring Diagram:

All Lead Lengths 12"

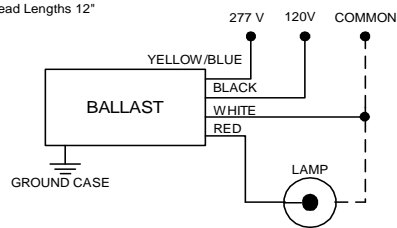

F-Can Wiring Diagram

### Ordering Information

Order Suffix

Description

Ignitor:

IN CAN

The ignitor is included as part of the potted assembly.

Ballast to Lamp Distance  
(BTL) = 50 feet  
Temp Rating: 90°C

Data is based upon tests performed by Philips Lighting Electronic N.A. in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

Philips Lighting Electronic N.A.

10275 West Higgins Road • Rosemont, IL 60018 • Tel:800-322-2086 Fax:888-432-1882  
Customer Support/ Technical Service:800-372-3331 • OEM Support: 866-915-5886

07/19/13