


PHILIPS ADVANCE


Low Pressure
Sodium
Lamp Ballast

Catalog Number 71A0280
For 18W L69
60 Hz HX-HPF
Status: Active


DIMENSIONS AND DATA

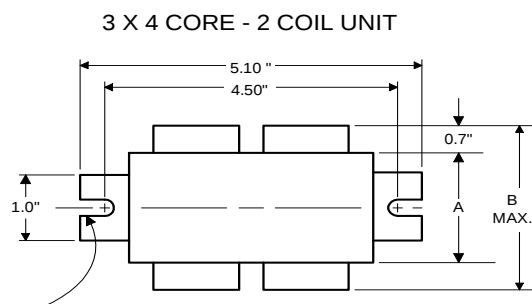

0.25" WIDE
2 SLOTS

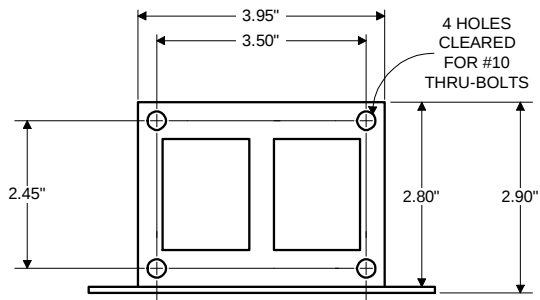

Capacitor: 7C050L30RA




Capacitance: 5
Dia/Oval Dim: 1.25
Height: 2.25
Temp Rating: 105°C

Ignitor: NA

This ballast does not
require the use of an ignitor.

INPUT VOLTS	120	277			
CIRCUIT TYPE	HX-HPF				
POWER FACTOR (min)	90%				
REGULATION					
Line Volts	±5%				
Lamp Watts	±10%				
LINE CURRENT (Amps)					
Operating.....	0.27	0.12			
Open Circuit.....	0.85	0.40			
Starting.....	0.30	0.13			
UL TEMPERATURE RATINGS					
Insulation Class	H(180°C)				
Coil Temperature Code	1029				
MIN. AMBIENT STARTING TEMP.	-20°F or -30°C				
NOM. OPEN CIRCUIT VOLTAGE	315				
INPUT VOLTAGE AT LAMP DROPOUT.....	45	100			
INPUT WATTS	30				
RECOMMENDED FUSE (Amps).....	3	2			
CORE and COIL					
Dimension (A)	1.00				
Dimension (B)	2.40				
Weight (lbs.)	4.5				
Lead Lengths	12"				
CAPACITOR REQUIREMENT					
Microfarads	5.0				
Volts (min.)	250				
Fault Current Withstand (amps)					
60 Hz TEST PROCEDURES (Refer to Advance Test Procedure for HID Ballasts - Form 1270)					
High Potential Test (Volts)					
1 minute	2000				
2 seconds	2500				
Open Circuit Voltage Test (Volts)	280-350				
Short-Circuit Current Test (Amps)					
Secondary Current	0.30-0.40				
Input Current.....	0.10-0.20	0.05-0.10	-	-	-

Wiring Diagram:

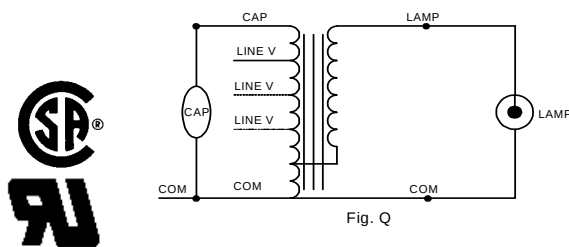

Ordering Information

Order Suffix

Description

Data is based upon tests performed by Philips Lighting Electronic N.A. in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

Philips Lighting Electronic N.A.

10275 West Higgins Road · Rosemont, IL 60018 · Tel:800-322-2086 Fax:888-432-1882
Customer Support/ Technical Service:800-372-3331 · OEM Support: 866-915-5886

06/26/13