

DOWNLIGHT

MBS145

Installation Instruction 安装说明

8241 100 01942






IEC
60598

GB
7000

IP20




Type Number 产品型号	Lamp 光源	Lampholder 灯座	Voltage/Frenquency 电压/频率	Current 电流	P.F. 功率因素
MBS145-070TD	MHN-TD 70W	RX7S	220-240V~/50-60Hz	0.092A	0.85
MBS145-150TD	MHN-TD 150W				
MBS145-035TC	CDM-T 35W	G12			
MBS145-070TC	CDM-T 70W				
MBS145-150TC	CDM-T 150W				

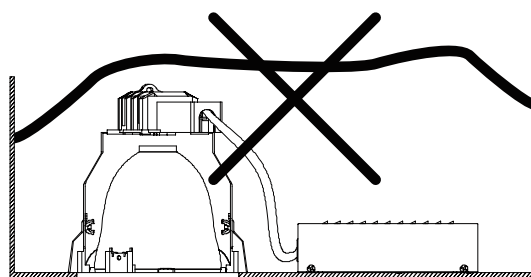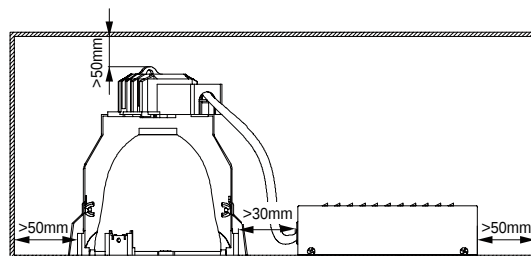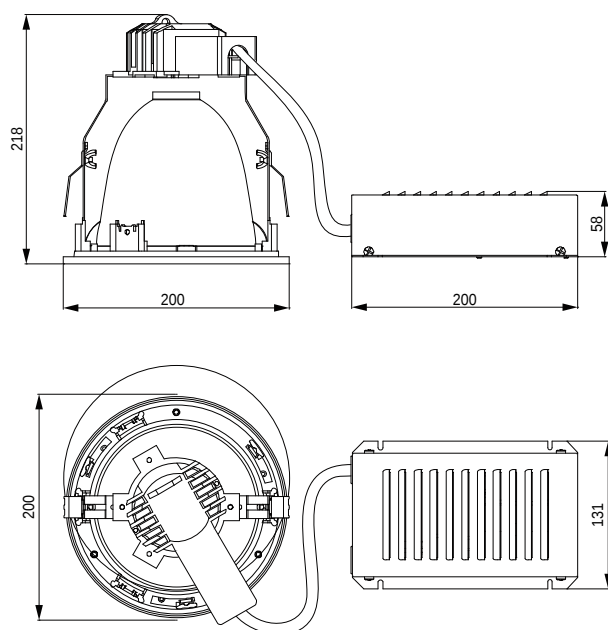


The luminaire should not be covered with thermally insulating matting or similar material!
本灯具不允许被隔热衬垫或类似材料覆盖!


- 1 Cut a hole on the ceiling
在天花板上开孔

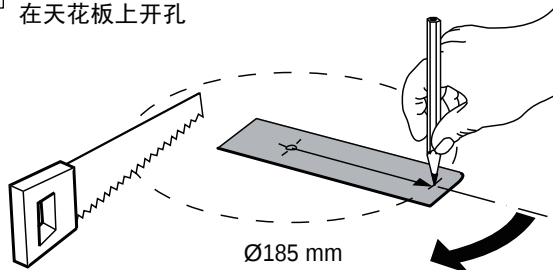


- 2 Pull the Gear box cover out
打开电器箱盖

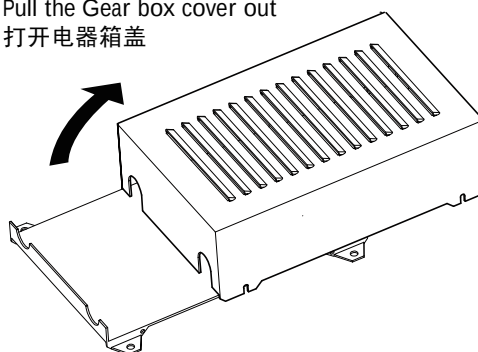


- 3 Connect the Power cord to the Terminal block
正确连接电源线

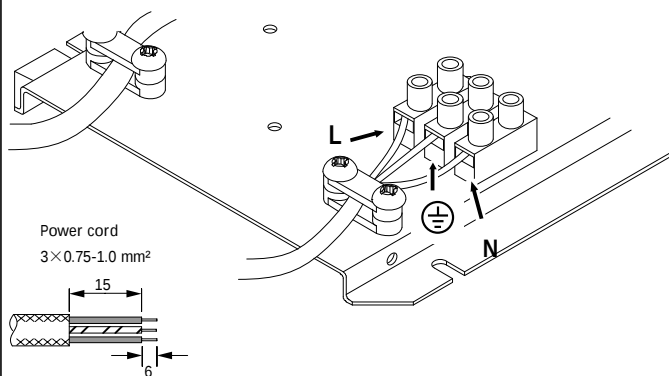


- 4 Put the Power cord through the Grommet on the Gear box cover, rotate the Screws clockwise and fix the Gear box cover
将电源线穿过电器箱, 顺时针旋转螺丝, 将电器箱锁紧

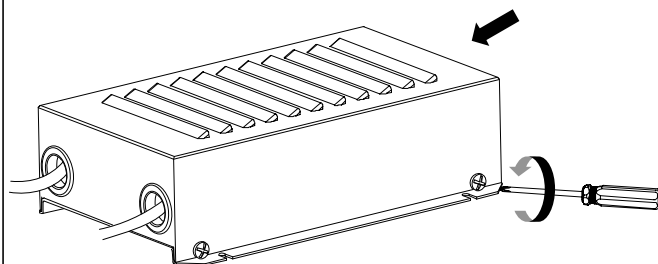


- 5 Rotate the Panel counter-clockwise and pull it out
将白环逆时针旋转取出

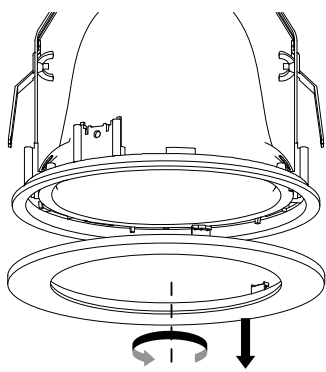


- 6 Pull the Reflector out
取出反射器

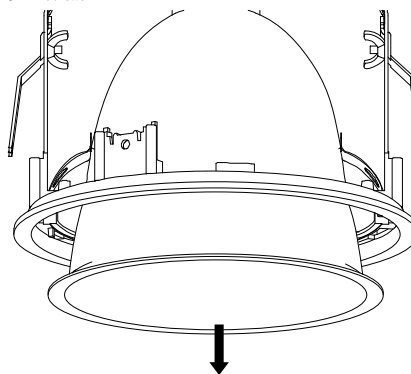


- 7 Put the Luminaire into the Hole on the Ceiling
将电器箱及灯具放入天花板的孔中

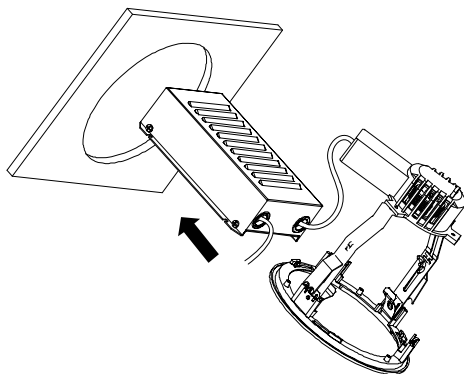


- 8 Adjust two Screws to fix the Luminaire on the Ceiling
通过调整螺丝将灯具安装固定于天花板

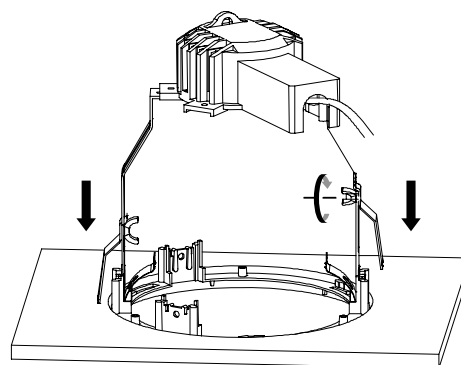

- 9 Install the Reflector into the Luminaire
装入反射器

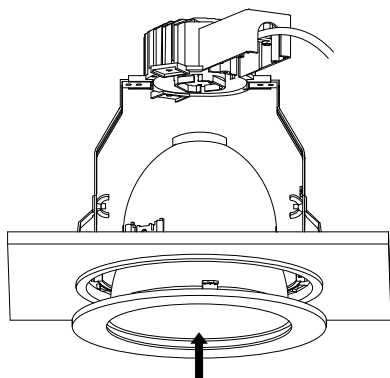

- 10 Install Lamp into the Lampholder, then fix the Panel
安装光源及白环

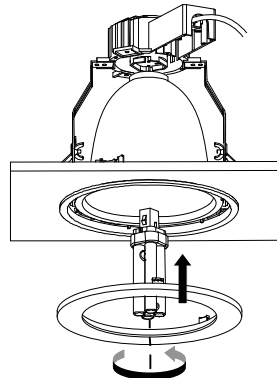

1. Disconnect the Unit before replacing the Lamp
更换光源前请先切断电源
2. Replace any cracked safety front glass
若安全玻璃有任何破损, 请及时更换