

Mini LED Tempo

BVP161

Mounting instruction / 安装说明书


多用途小型投光灯

4441 000 98991




CQC Description CQC描述	Power 功率	Voltage 电压	Frequency 频率	Beam 配光类型	Windage Area 迎风面积 (m²)	kg
BVP161 40LED130	30W	220-240V~	50/60Hz	Symmetric	0.027	0.6
BVP161 76LED120	50W	220-240V~	50/60Hz	Symmetric	0.054	1.2
BVP161 80LED158	70W	220-240V~	50/60Hz	Symmetric	0.075	2.0
BVP161 114LED150	100W	220-240V~	50/60Hz	Symmetric	0.075	2.0


30W 50W Dimension Drawing
30W、50W 尺寸图:

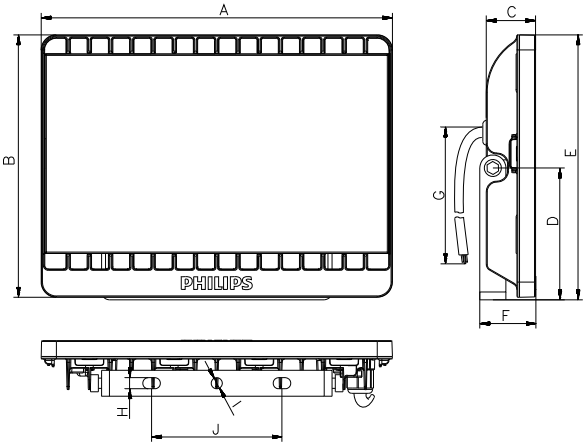


30W 50W Mounting Angle
30W、50W 可旋转安装角度:

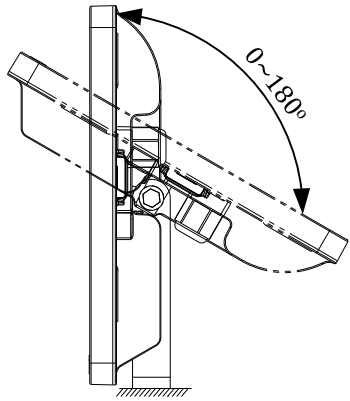

70W 100W Dimension Drawing
70W、100W 尺寸图:

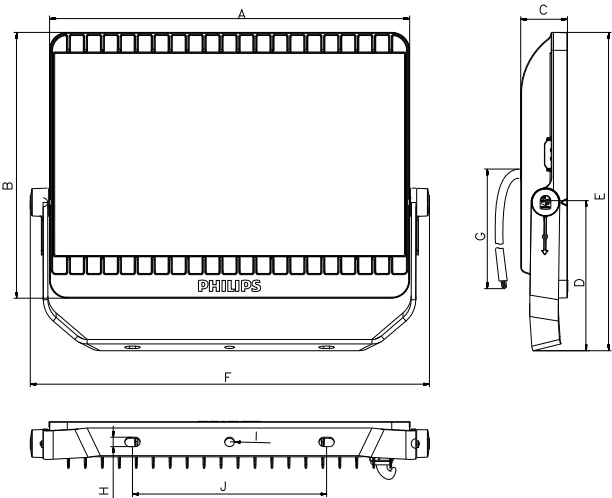

70W 100W Mounting Angle
70W、100W 可旋转安装角度:

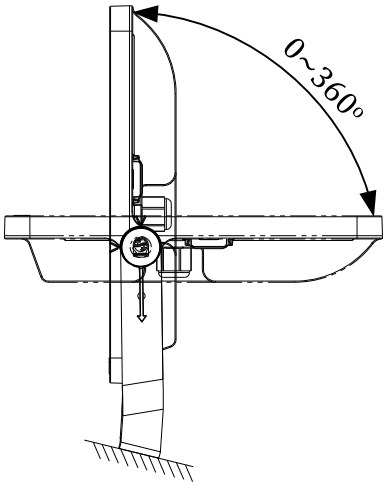

Philips Lighting (China) Investment Co., Ltd.
Address: Building No. 9, Lane 888, Tianlin Road,
Minhang District, Shanghai, China
Postalcode: 200233
飞利浦照明(中国)投资有限公司
地址: 中国上海市闵行区田林路888弄9号楼
邮编: 200233

PHILIPS

尺寸 型号	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	J (mm)
30W	193.2	142.5	33.8	75	153.5	38	300	8.5	8.5	70
50W	269.5	201.5	37.8	101	203.5	43	300	8.5	8.5	100
70W	315.5	233.5	41	131.5	279	350	300	8.5	8.5	170
100W	315.5	233.5	41	131.5	279	350	300	8.5	8.5	170



1. The connection of power cable on luminaire is type Y. The Luminaire should be installed by a qualified electrician and wired in accordance with the latest IEC-60364-7-714 regulations.
该灯具上的电源线缆属Y型连接。灯具应由有资格的电工安装，接线应符合IEC-60364-7-714标准或国家标准。

2. Switch off electricity supply (mains) before operation.
操作前请务必切断电源。


3. Waterproof box is necessary for wire connection.
必须使用IP65以上防水接线盒。

4. The fitting is electrically insulated, according to IEC60598, classification I.
External earthing is therefore required.
本灯具必须接地线，以确保安全。

5. The luminaire should be replaced immediately if any crack or deterioration.
若灯具破损，请勿继续使用。


6. Do not use this luminaire in road lighting power supply system and do not use this luminaire as road lighting.
本灯具不能应用在路灯供电线路中及作为路灯安装使用。

1 Connect the power cord 接电源线

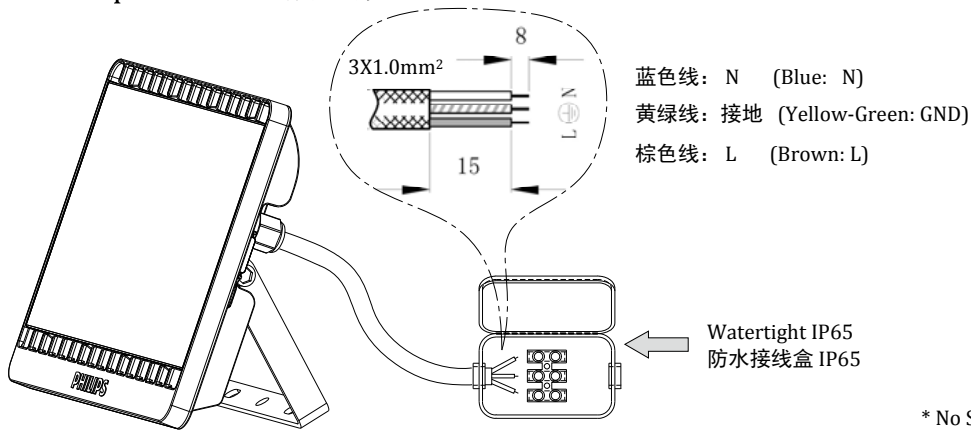

* No Supplied Watertight Box
本灯具不提供防水接线盒

2 Install the luminaire 安装灯具

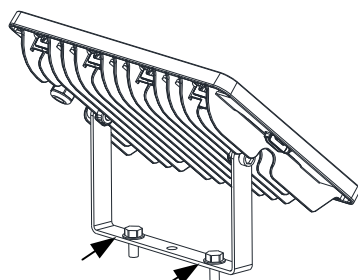

Install the luminaire and make sure it will not fall off.
安装、固定好灯具，须确保其不会掉落。

3 Fasten the bolt 锁紧两侧紧固螺栓

