


PHILIPS ADVANCE

Metal
Halide
Lamp Ballast


Catalog Number 71A6051
For 400W M59
60 Hz CWA
Status: Active

DIMENSIONS AND DATA

4 1/4 X 4 3/4 CORE - 2 COIL UNIT

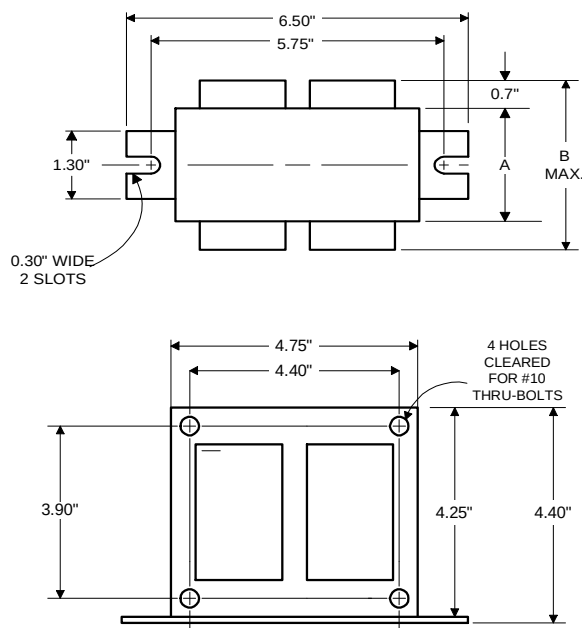

Capacitor: 7C240P40-R




Capacitance: 24
Dia/Oval Dim: 1.75
Height: 4.8
Temp Rating: 105°C

Ignitor: NA

This ballast does not
require the use of an ignitor.

		120	208	240	277	480
INPUT VOLTS						
CIRCUIT TYPE		CWA				
POWER FACTOR (min)		90%				
REGULATION						
Line Volts		±10%				
Lamp Watts		±10%				
LINE CURRENT (Amps)						
Operating.....		4.13	2.29	2.00	1.72	0.99
Open Circuit.....		2.86	1.45	1.29	1.10	0.62
Starting.....		3.51	2.00	1.72	1.49	0.86
UL TEMPERATURE RATINGS						
Insulation Class		H(180°C)				
Coil Temperature Code		1029				
MIN. AMBIENT STARTING TEMP.		-20°F or -30°C				
NOM. OPEN CIRCUIT VOLTAGE		300				
INPUT VOLTAGE AT LAMP DROPOUT.....		60	115	130	145	260
INPUT WATTS		455				
RECOMMENDED FUSE (Amps).....		10	7	5	5	3
CORE and COIL						
Dimension (A)		2.34				
Dimension (B)		4.45				
Weight (lbs.)		11.5				
Lead Lengths		12"				
CAPACITOR REQUIREMENT						
Microfarads		24.0				
Volts (min.)		400				
Fault Current Withstand (amps)						
60 Hz TEST PROCEDURES (Refer to Advance Test Procedure for HID Ballasts - Form 1270)						
High Potential Test (Volts)						
1 minute		2000				
2 seconds		2500				
Open Circuit Voltage Test (Volts)		280-320				
Short-Circuit Current Test (Amps)						
Secondary Current		3.04-4.56				
Input Current.....		2.70-4.05	1.56-2.34	1.28-1.92	1.17-1.76	0.68-1.02

Wiring Diagram:

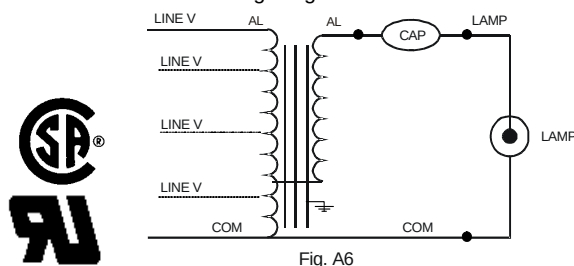

Ordering Information

Order Suffix	Description
001D	STANDARD IC PACK WITH DRY CAP - NO FLAG TERMINALS

Data is based upon tests performed by Philips Lighting Electronic N.A. in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

Philips Lighting Electronic N.A.

10275 West Higgins Road · Rosemont, IL 60018 · Tel:800-322-2086 Fax:888-432-1882
Customer Support/ Technical Service:800-372-3331 · OEM Support: 866-915-5886

07/29/13