
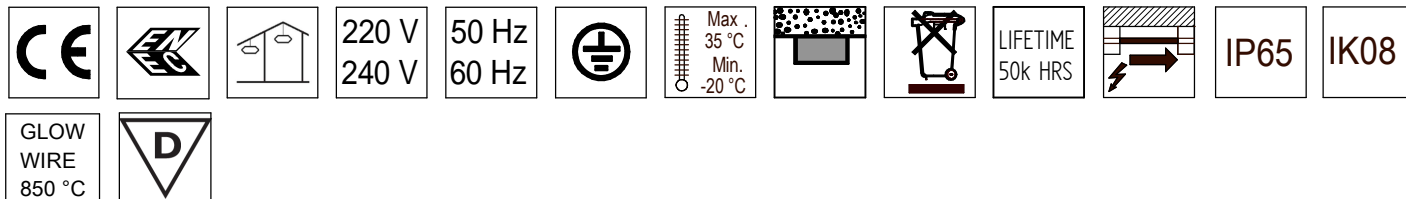


PHILIPS


Coreline Waterproof TW







WT120C

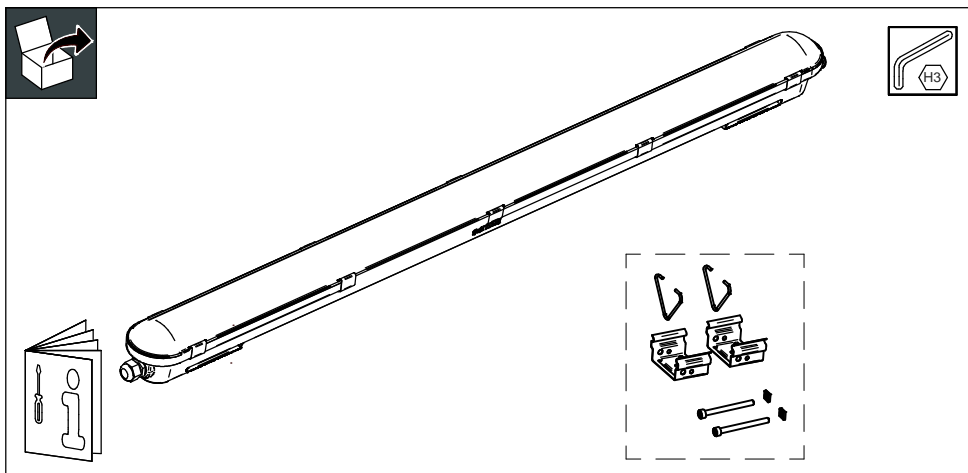


	System Power(W)		System light output (Lm)	Color temperature (K)
WT120C LED22S/840 PSU TW3 L1200	22	1,6	2200	4000
WT120C LED40S/840 PSU TW3 L1200	35,5	1,6	4000	4000
WT120C LED34S/840 PSU TW3 L1500	28,5	1,9	3400	4000
WT120C LED60S/840 PSU TW3 L1500	57	1,9	6000	4000

Type	Dimension (mm)						Nr.of clips			
	A	B	C	D	E	F				
W T120C LED 22S L1200	82	1250	87	38	960	96	10			
W T120C LED 40S L1200		1530			1213		12			
W T120C LED 34S L1500										
W T120C LED 60S L1500										

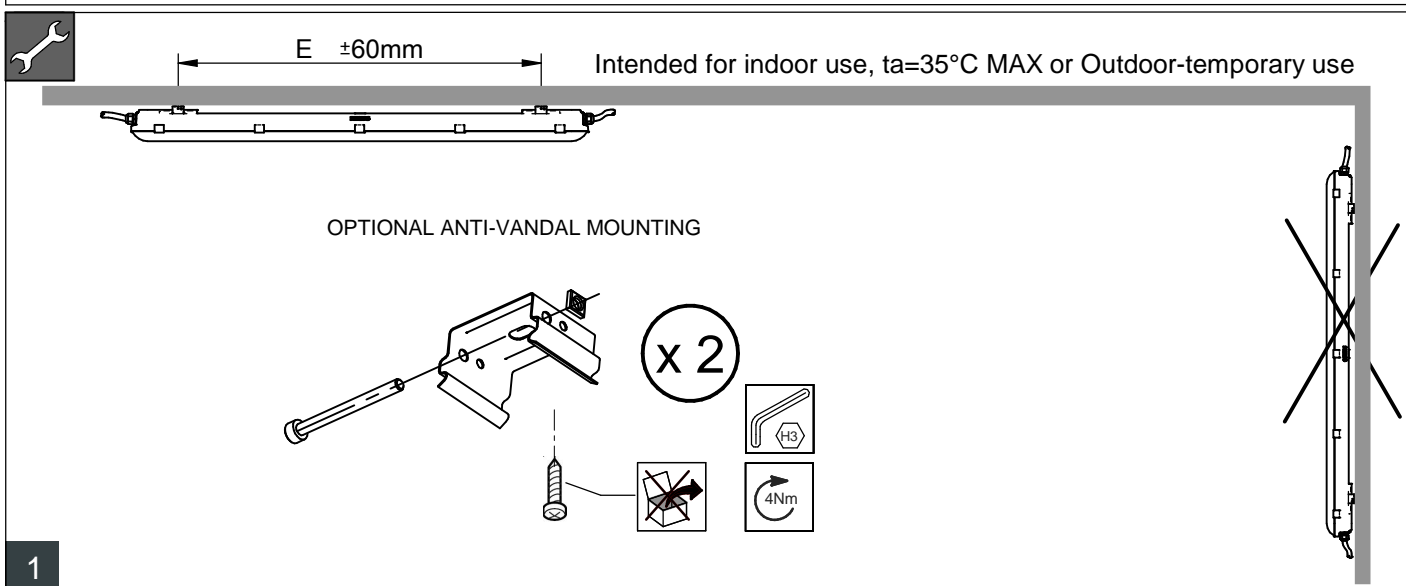

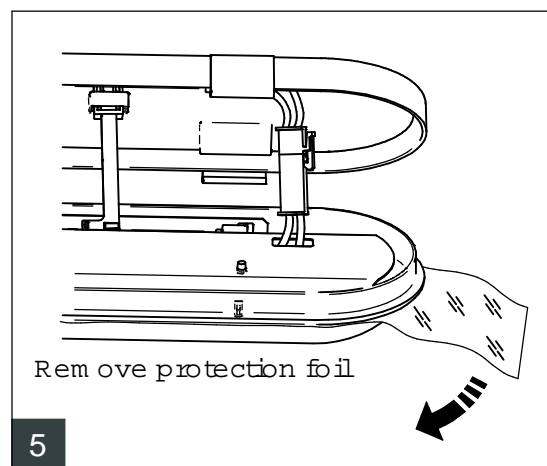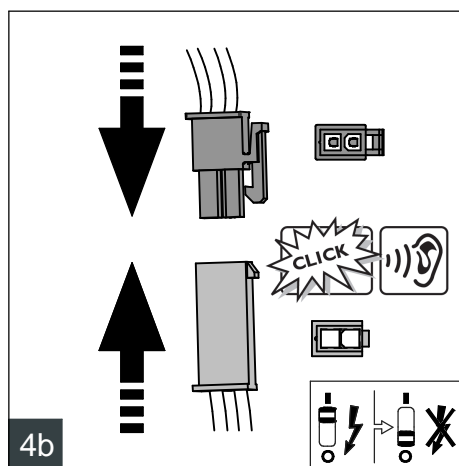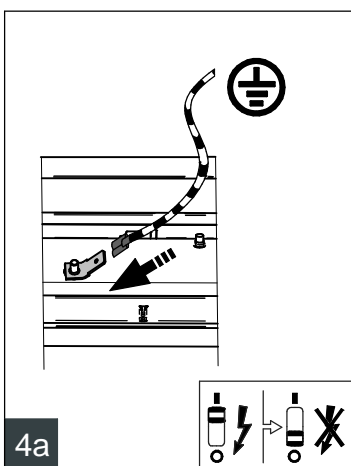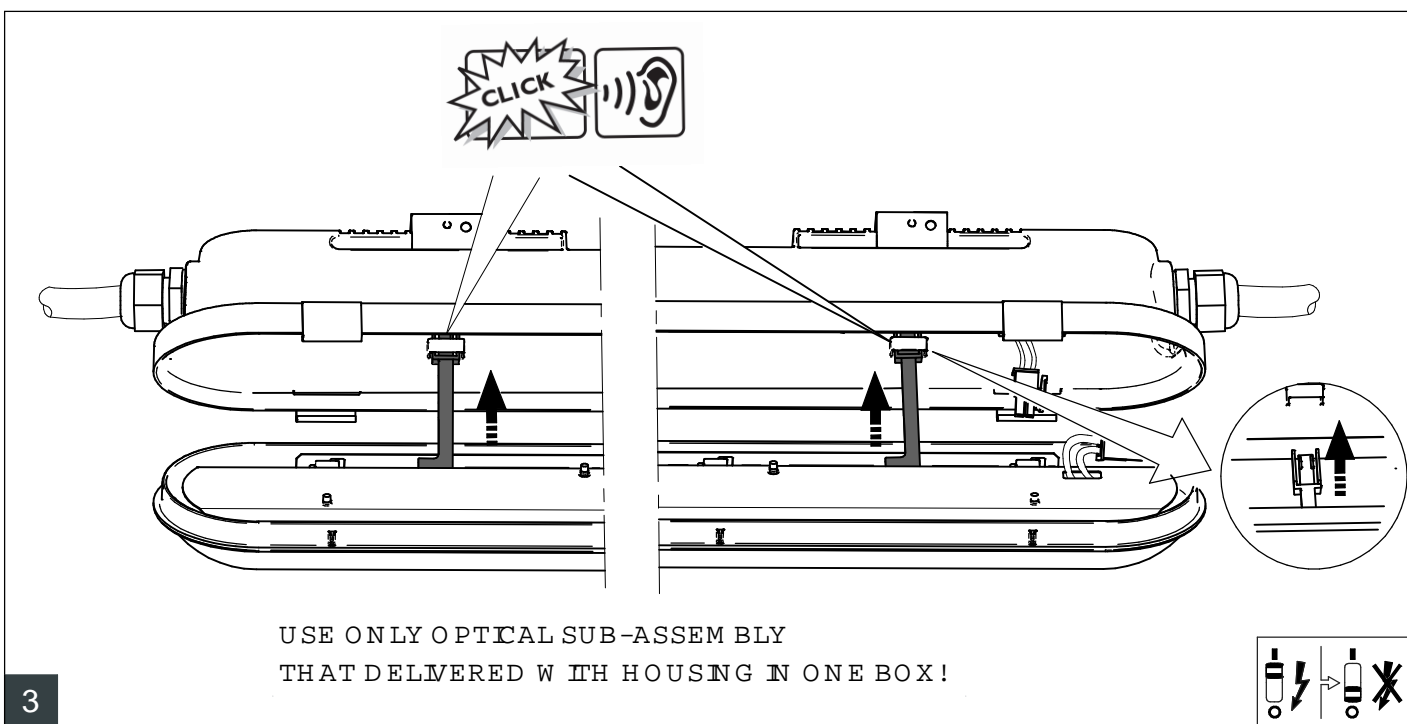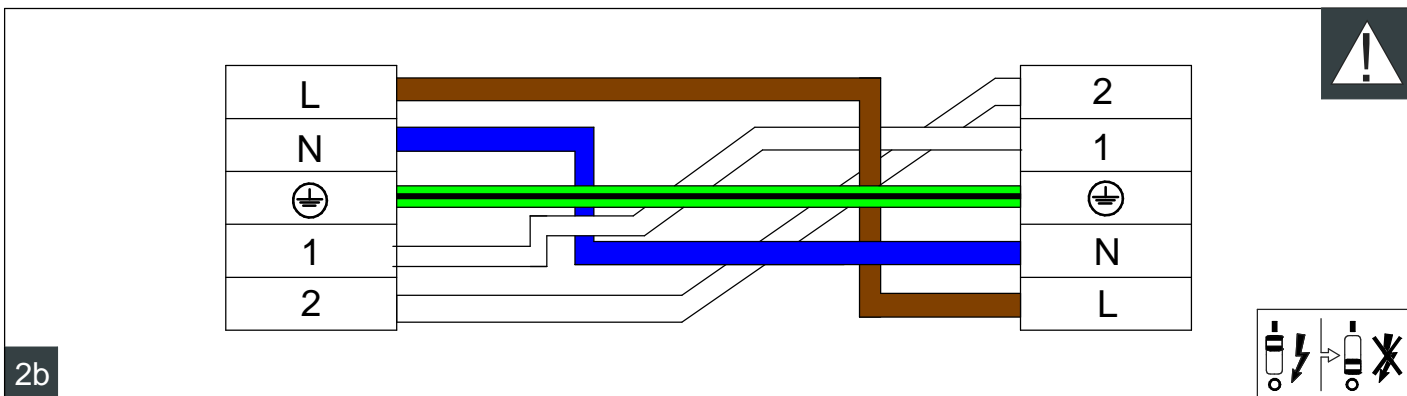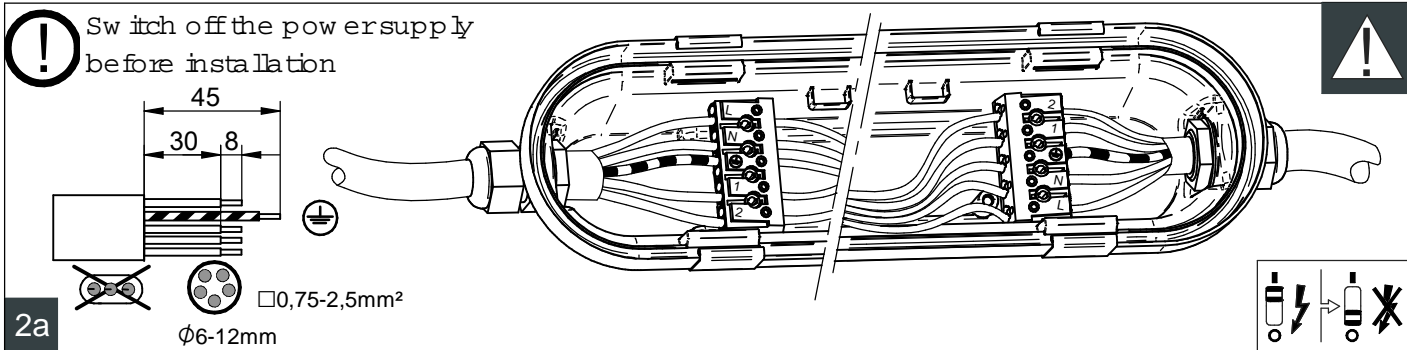

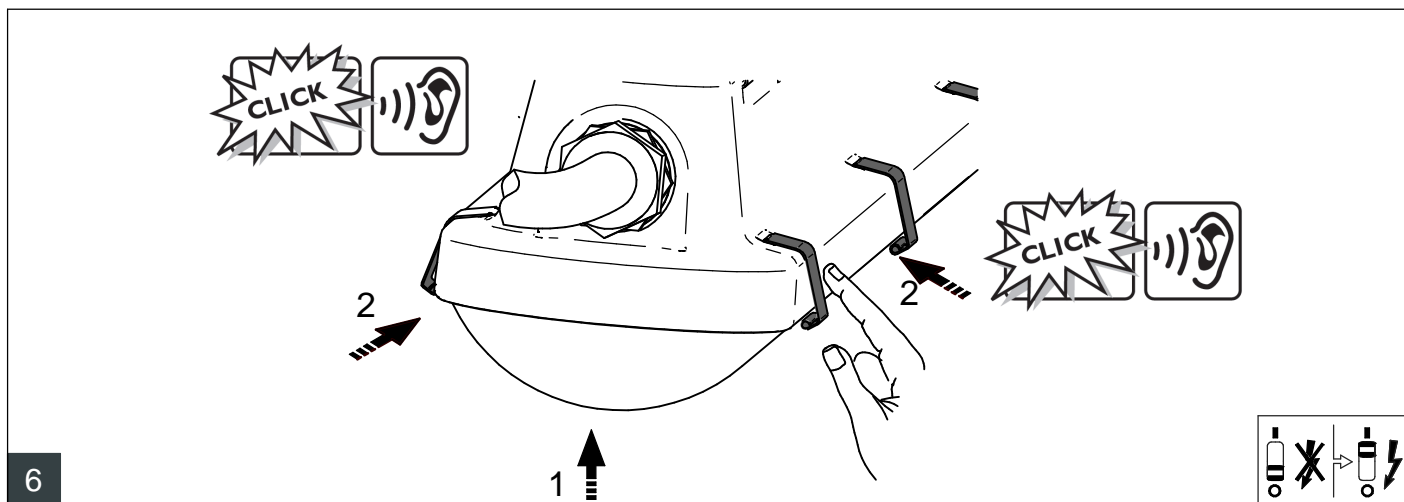


SERVICE (DRIVER REPLACEMENT)


Light source (LED) is not replaceable.

MAXIMAL SCREWDRIVER SIZE:

MAX 8mm

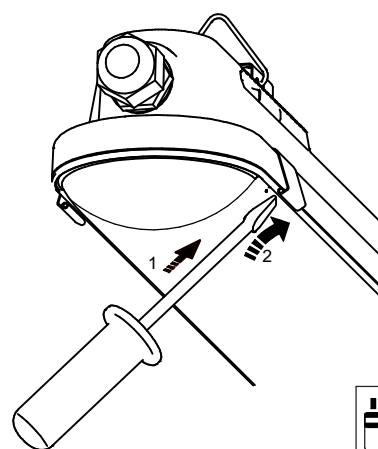

	LED 22S	LED 34S	LED 40S	LED 60S
Peak [A]	8	17,8	8	8
Tw idth [μs]	60	282	60	60
Max.Nrofproducts				
Drivers / M CB 16A type B [max.]	24	24	24	24
Drivers / M CB 10A type B [max.]	15	15	15	15
Drivers / M CB 16A type C [max.]	40	40	40	40
Drivers / M CB 10A type C [max.]	24	24	24	24

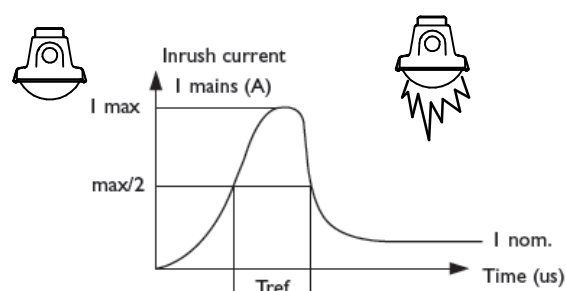

Maintenance instructions

To assure the lighting quality of this unique LED lighting concept there are only a few instructions regarding the maintenance of this LED luminaire:

* Do not touch electronic components!
Electronic components may be under high voltage.

* Do not stare into LED light beam.

* The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.

* Above average concentraion of sulfur effects the useful lifetime of the product.
E.g: Light color changes from white to blue. Typically in chicken & pig farms.

