


PHILIPS

Ledinaire Wall-mounted

WLO60V

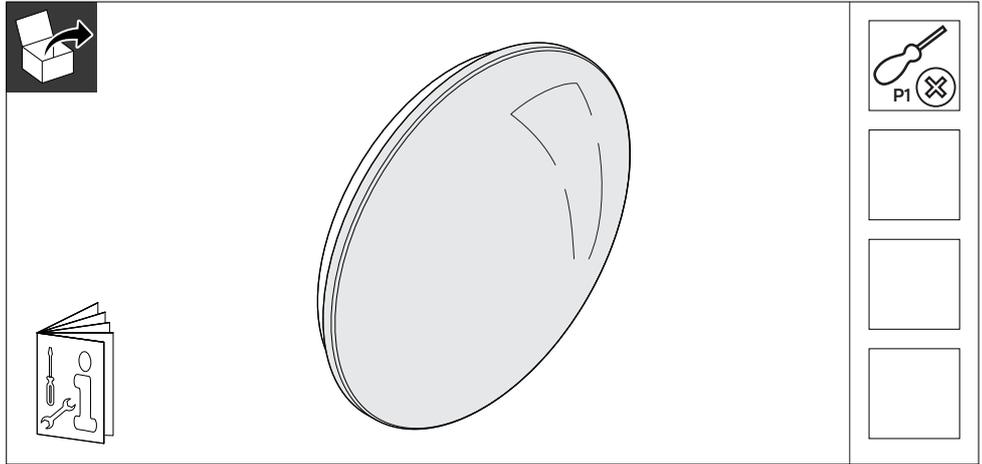

220V
240V

50Hz
60Hz

LEDs



IP44


IK03

Ta
25°C

GLOW
WIRE
650°C




	System lumen (lm)	P (W)	A (mm)	B (mm)	C (mm)	D (mm)	kg
WLO60V LED11S	1100	14.5	285	267	205	85	0.40
WLO60V LED17S	1700	22	345	326	250	95	0.60
WLO60V LED17S MDU	1700						0.64

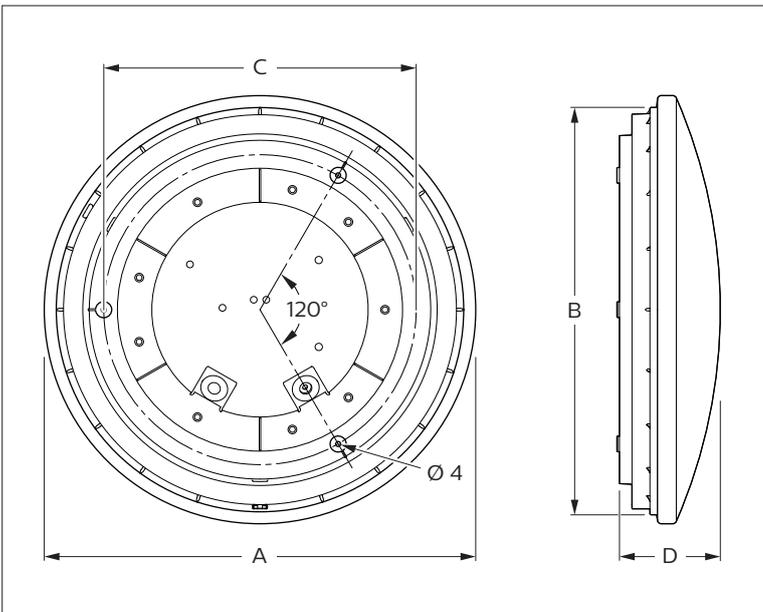






- The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.
- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.



Inrush current

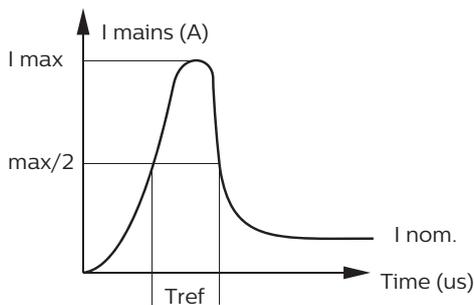

	LED11S	LED17S
Electrical characteristics		
I _{max} (A)	12.3	21.3
T _{ref} (μs)	1.44	1.84
MCB	Luminaires Max.	
B-10 A	20	20
B-13 A	25	25
B-16 A	32	32
C-10 A	33	33
C-13 A	43	43
C-16 A	54	54

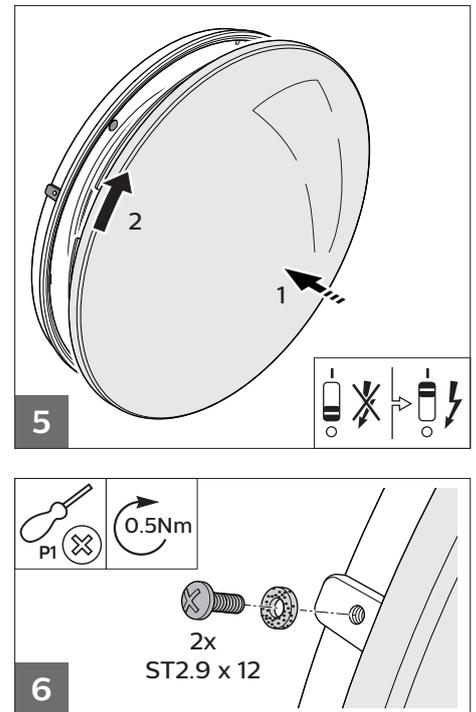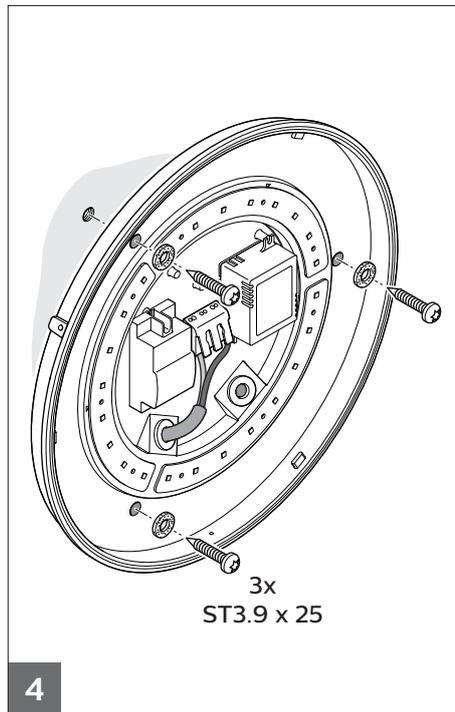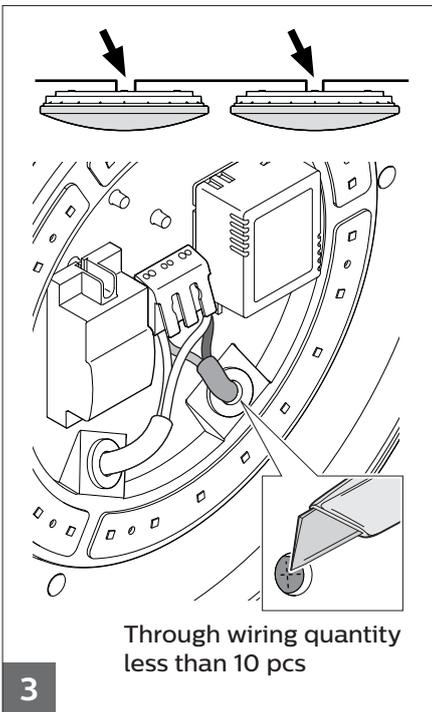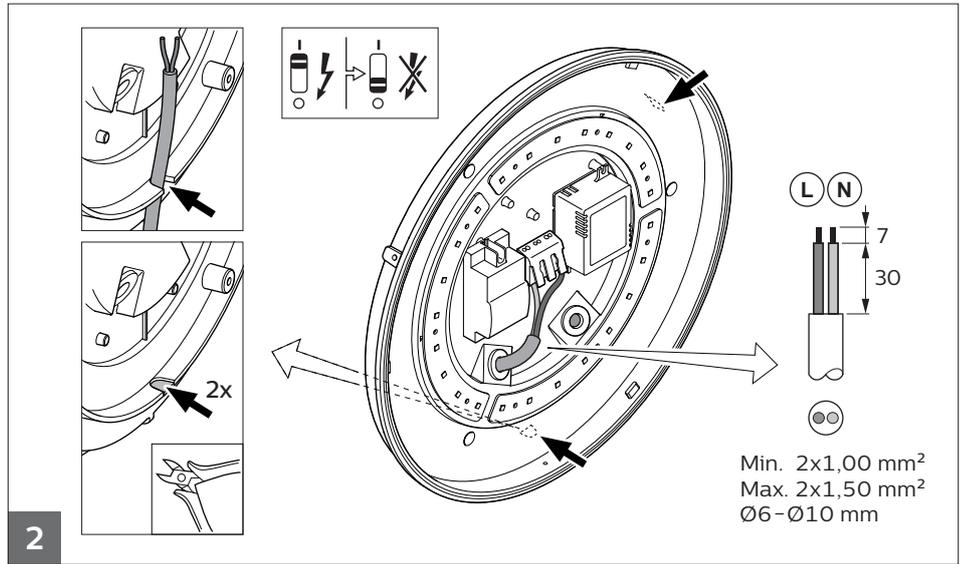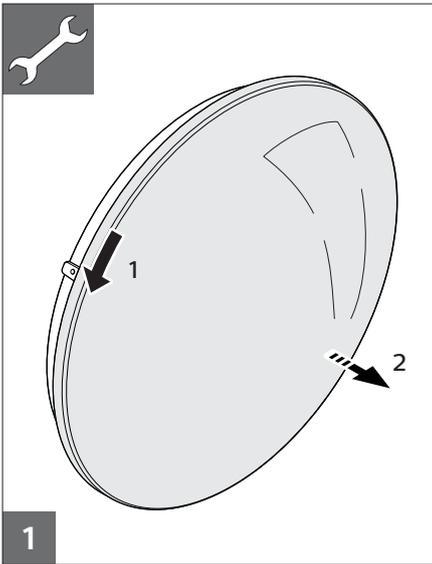

Microwave Motion Sensor (For WL060V LED17S MDU only).

By selecting the combination on the DIP switch, sensor data can be precisely set for each specific application.

	1	2	3	%
I	on	on	on	100
II	-	on	on	75
III	on	-	on	50
IV	-	-	on	25
V	-	-	-	10

	4	5	6	Time
I	on	on	on	5 s
II	-	on	on	30 s
III	on	-	on	90 s
IV	-	-	on	3 min
V	on	on	-	20 min
VI	-	-	-	30 min

	4	5	6	Lux
I	on	on	on	2
II	on	on	-	10
III	-	on	-	25
IV	on	-	-	50
V	-	-	-	Disable

Detection area


Detection area can be reduced by selecting the combination on the DIP switches to fit precisely each application.

Hold time

Refers to the time period the lamp remains at 100% illumination after no motion detected.

Daylight sensor

The sensor can be set to only allow the lamp to illuminate below a defined ambient brightness threshold.

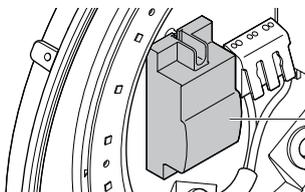

Microwave Motion Sensor

When set to Disable mode, the daylight sensor will switch on the lamp when motion is detected regardless of ambient light level. 50lux, 25lux: twilight operation, 10lux, 2lux: darkness operation only.