

HID-Constant wattage BSX for SOX

BSX 36 H66 240V 50Hz CW-173/44

Constant-wattage (potted) electromagnetic copper/iron ballasts for use with an external ignitor for SOX and SOX-E lamps


Product data

| | |
|---------------------------------|--------------------------------|
| Operating and Electrical | |
| Input Voltage | 230 to 240 V |
| Line Frequency | 50 Hz |
| Input Frequency | 50 Hz |
| Wiring | |
| Connector Type | Screw |
| Approval and Application | |
| Approval Marks | CE marking ENEC certificate |
| Product Data | |
| Order product name | BSX 36 H66 240V 50Hz CW-173/44 |

| | |
|---------------------------------|--------------------------------|
| Full product name | BSX 36 H66 240V 50Hz CW-173/44 |
| Full product code | 871150092003499 |
| Order code | 913653920526 |
| Material Nr. (12NC) | 913653920526 |
| Numerator - Quantity Per Pack | 1 |
| EAN/UPC - Product/Case | 8711500920034 |
| Numerator - Packs per outer box | 12 |
| EAN/UPC - Case | 8711500938411 |

HID-Constant wattage BSX for SOX

Dimensional drawing

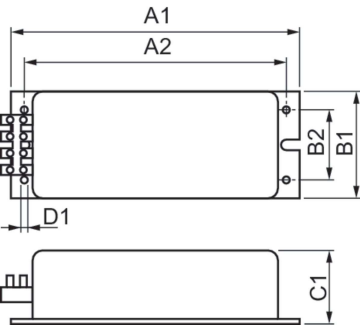

| Product | D1 | C1 | A1 | A2 | B1 | B2 |
|-----------------------------------|--------|---------|----------|----------|---------|---------|
| BSX 36 H66 240V 50Hz CW-173/44 | 4.2 mm | 44.0 mm | 173.0 mm | 157.0 mm | 64.0 mm | 42.0 mm |

