



# TrustSight Emergency kits

## TrustSight LED 40-80mA 1hr F

Philips TrustSight LED emergency kits come complete with battery packs. Designed for use with –current control LED drivers, they operate as a de-centralized emergency lighting solution in the event of a mains voltage failure. TrustSight LED emergency kit is compatible with most LED control gear on the market. They support applications requiring 1 or 3 hours operating time and are CE and ENEC-certified.


### Product data

General Information	
Lighting Technology	LED
Operating and Electrical	
Output Current (Nom)	72-88 mA
Earth Leakage Current (Max)	0.7 mA
Inrush Current Width	0.01 ms
Power Factor (Fraction)	0.45
Inrush Current Peak (Max)	3.5 A
Output Power (Nom)	2.64-2.64 W
Temperature	
Ambient temperature range	0 °C to 50 °C
T-Case Maximum (Max)	55 °C
Emergency Operation	
Battery Capacity	1,300 mAh

Approval and Application	
Ingress protection code	-
Approval Marks	CE marking ENEC certificate
Product Data	
Order product name	TrustSight LED 40-80mA 1hr F
Full product name	TrustSight LED 40-80mA 1hr F
Full product code	871829169782400
Order code	913700697466
Material Nr. (12NC)	913700697466
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718291697824
Numerator - Packs per outer box	12
EAN/UPC - Case	8718291697831

TrustSight Emergency kits

Dimensional drawing

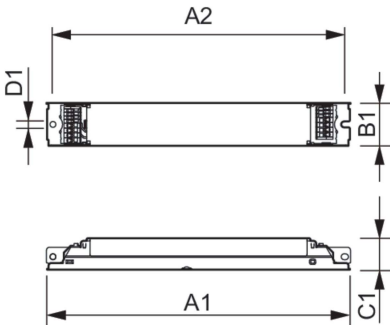

Product	D1	C1	A1	A2	B1
TrustSight LED 40-80mA 1hr F	4.1 mm	21.7 mm	360.0 mm	350.0 mm	30.0 mm

