



# Centium T8 Instant Start

## CENTIUM ELE BALLAST (1) F32T8 120-277V

Reliable and energy efficient Philips Advance's Centium commercial grade specifications, plus added benefits of lamp striation reduction technology.

### Product data


General information		Wiring	
Lamp Type	F32T8	Color Input Terminals	No terminals
Number of Lamps	1 piece/unit	Color Output Terminals	No terminals
Ballast Type	Electronic Fluorescent	Wire Striplength	0.50/0.375 mm
Base Model	ICN132MC	Lamp Connection	Parallel
Suitable For Outdoor Use	Yes	Wire Length by Color	See data sheet
Automatic Restart	Yes	Wire Gauge (Nom)	18AWG mm
Operating and electrical		Wire Type	Solid
Input Voltage	120 to 277 V	Remote Wiring Configuration Allowed	Yes
Input Frequency	50 to 60 Hz	Tandem Wiring Configuration Allowed	No
Total Harmonic Distortion USA	10 %	Through Wiring Configuration Allowed	No
Ignition Method	Instant Start	Max Ballast-Lamp Distance Remote Wiring	20'
Crestfactor (Nom)	1.7	Max Ballast-Lamp Distance Tandem Wiring	NA
Ignition Time (Nom)	0.1 s	Max Ballast-Lamp Distance Through Wiring	NA
Ballast Factor (Nom)	0.88	Connector Type	No connector
Power Factor (Nom)	0.98	Temperature	
Input Current (Max)	0.25 A	T-Case Maximum (Nom)	70 °C
Input Current (Min)	0.11 A	Mechanical and housing	
Input Power (Nom)	30-30 W	Housing Material	Metal
Rated Lamp Power	32 W	Housing	MC

## Centium T8 Instant Start

Housing Dimensions	9.5" x 1.08" x 1.05"
<b>Approval and application</b>	
EMC Immunity Standard	FCC Non-Consumer
Approval Marks	CSA certificate UL certificate CEC Listing RoHS Compliant
Hum And Noise Level	A
UL Recognized	No
<b>Product data</b>	
Order product name	CENTIUM ELE BALLAST (1) F32T8 120-277V

EAN/UPC - Product	781087037478
Order code	118828
Local order code	118828
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	20
Material Nr. (12NC)	913710264302
Copy Net Weight (Piece)	259.000 g

### Dimensional drawing

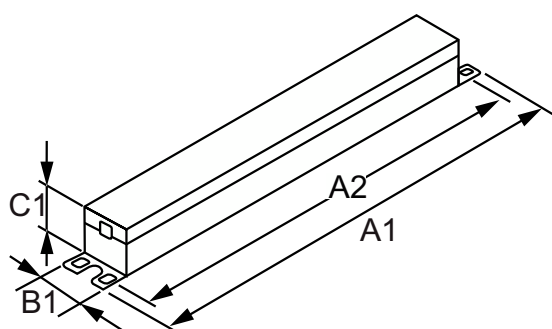

#### Product

CENTIUM ELE BALLAST (1) F32T8 120-277V

CENTIUM ELE BALLAST (1) F32T8 120-277V

