


## Downlighting

Calculite LED gen 3  
special installations

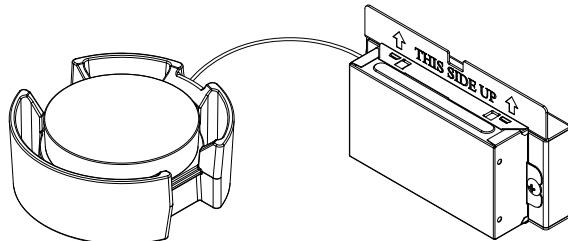

**IS-MS-IC**

Read and understand these instructions  
before installing luminaire (fixture).

This luminaire is intended for installation in accordance with the National Electrical Code and local regulations. To assure full compliance with local codes and regulations, check with your local electrical inspector before installation. To prevent electrical shock, turn off electricity at fuse box before proceeding. Allow fixture to cool before handling.

### Retain these instructions for maintenance reference

**Installation for** For marked spacing applications install with the following spacings between:

- Center-to-center of adjacent luminaires: 24" (610mm)
- Luminaire center to side building member: 12" (305mm)

**Marked spacing applications** (Modules marked with an X below require marked spacing)

Light engine	500 lm	1000 lm	1500 lm	2000 lm	2500 lm	3000 lm	3500 lm	4800 lm	6000 lm
C4L_Z10U series	—	—	—	—	—	X	N/A	N/A	N/A
C4L_LU series	N/A	—	—	—	X	X	N/A	N/A	N/A
C4L_DU series	N/A	—	—	—	—	X	N/A	N/A	N/A
C6L_Z10U series	N/A	—	—	—	—	N/A	—	X	X
C6L_LU series	N/A	—	—	—	—	N/A	—	N/A	N/A
C6L_DU series	N/A	—	—	—	—	N/A	—	N/A	N/A

**Installation for** Calculite Rough-in section for IC new construction:

- C4RA, C4SA, C6RA & C6SA

**IC (insulated ceiling) applications** (Modules marked with an X below are not compatible for IC applications)


Light engine	500 lm	1000 lm	1500 lm	2000 lm	2500 lm	3000 lm	3500 lm	4800 lm	6000 lm
C4L_Z10U series	—	—	—	X <sup>1</sup>	X	X	N/A	N/A	N/A
C4L_LU series	N/A	—	—	X	X	X	N/A	N/A	N/A
C4L_DU series	N/A	—	—	X	X	X	N/A	N/A	N/A
C6L_Z10U series	N/A	—	—	—	—	N/A	X <sup>1</sup>	X	X
C6L_LU series	N/A	—	—	—	—	N/A	X	N/A	N/A
C6L_DU series	N/A	—	—	—	—	N/A	X <sup>1</sup>	N/A	N/A

1. Lumen package is compatible with medium/wide beam only.

© 2016 Philips Lighting Holding B.V. All rights reserved. Philips reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication. philips.com/luminaires

## Éclairage direct

Calculite DEL gén. 3  
installations spéciales

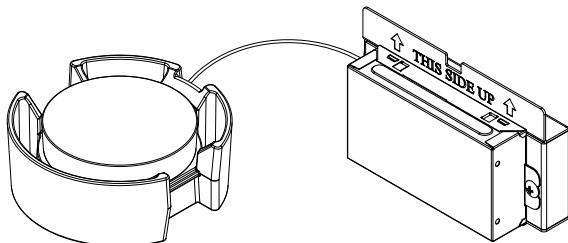

**IS-MS-IC**

Avant de débuter l'installation du luminaire,  
veuillez lire et bien comprendre ces directives.

Ce luminaire a été conçu pour une installation respectant les exigences du Code électrique national et des réglementations locales. Afin de garantir la conformité avec les codes et réglementations locaux, consulter un inspecteur électrique local avant d'effectuer l'installation. Afin de prévenir les chocs électriques, couper l'alimentation à la boîte de disjoncteurs avant de débuter. Laisser refroidir le luminaire avant de le manipuler.

### Garder ces directives pour références futures

**Installation pour** pour les applications à espacement marqué utiliser les espacements suivants pour l'application :

- Centre à centre des luminaires adjacents : 24 po (610mm)
- Luminaire centré avec la structure latérale de l'immeuble : 12 po (305mm)

**Applications à espacement marqué** (les modules affichant un X ci-dessous requièrent un espacement marqué)

Module lumière	500 lm	1000 lm	1500 lm	2000 lm	2500 lm	3000 lm	3500 lm	4800 lm	6000 lm
Série C4L_Z10U	—	—	—	—	—	X	S/O	S/O	S/O
Série C4L_LU	S/O	—	—	—	X	X	S/O	S/O	S/O
Série C4L_DU	S/O	—	—	—	—	X	S/O	S/O	S/O
Série C6L_Z10U	S/O	—	—	—	—	S/O	—	X	X
Série C6L_LU	S/O	—	—	—	—	S/O	—	S/O	S/O
Série C6L_DU	S/O	—	—	—	—	S/O	—	S/O	S/O

**Installation pour** Cadres de montage Calculite pour plafond isolé dans une nouvelle construction :

- C4RA, C4SA, C6RA, C6SA & C7RA

**Applications pour plafonds isolés** (Les modules affichant un X ci-dessous ne sont pas compatibles dans les plafonds isolés)

Module lumière	500 lm	1000 lm	1500 lm	2000 lm	2500 lm	3000 lm	3500 lm	4800 lm	6000 lm
Série C4L_Z10U	—	—	—	X <sup>1</sup>	X	X	S/O	S/O	S/O
Série C4L_LU	S/O	—	—	X	X	X	S/O	S/O	S/O
Série C4L_DU	S/O	—	—	X	X	X	S/O	S/O	S/O
Série C6L_Z10U	S/O	—	—	—	—	S/O	X <sup>1</sup>	X	X
Série C6L_LU	S/O	—	—	—	—	S/O	X	S/O	S/O
Série C6L_DU	S/O	—	—	—	—	S/O	X <sup>1</sup>	S/O	S/O

1. Le paquet Lumen est compatible avec un faisceau moyen / large uniquement.

© 2016 Philips Lighting Holding B.V. Tous droits réservés. Philips se réserve le droit de changer les spécifications et/ou de discontinuer tout produit et en tout temps sans préavis et ne pourra être tenu responsable pour toutes conséquences résultant de l'utilisation de cette publication. philips.com/luminaires