

INSTRUCTIONS POUR L'INSTALLATION DES PROJECTEURS ÉTAGÉS SUR RAIL LYTESPAN MINI HID À LAMPE MR16 CMH (GX10)

MISE EN GARDE : Veuillez prendre connaissance de ces directives avant de procéder à l'installation du luminaire.
Pour éviter les chocs électriques, couper le courant au panneau électrique avant de commencer. Pour assurer un bon fonctionnement sécuritaire, ce luminaire doit être mis à la terre. Consulter un inspecteur en électricité pour s'assurer que tout est conforme aux exigences et règlements en vigueur avant de procéder à l'installation. Conserver ces directives à titre de références.

ATTENTION : Utiliser uniquement avec un système d'éclairage sur rail Lytespan.

Veuillez suivre les lois applicables pour l'élimination des lampes contenant du mercure.

Note : S'assurer que le luminaire est mis hors tension avant de procéder à l'installation ou au remplacement d'une lampe.

A. ADAPTATEUR :

1. Insérer l'adaptateur dans le rail avec le levier de blocage du côté du guidon. (Vig.1)
2. Pivoter l'adaptateur de 90° avec l'aide du boîtier de ballast dans le sens des aiguilles d'une montre jusqu'à ce que le levier de blocage s'enclenche et se verrouille en place. (Vig.2)
3. Pour enlever, presser le levier de blocage et pivoter l'adaptateur dans le sens contraire des aiguilles d'une montre avec l'aide du boîtier de ballast. (Vig.2)

B. ADAPTATEUR : (circuit double)


1. Le contact de laiton peut-être relevé ou abaissé. La position abaissée pour le premier circuit et la position relevée (au déclat) pour le deuxième circuit. (Vig.3)

C. REMPLACEMENT DE LA LAMPE :

1. Tirer sur le capuchon du boîtier. (Vig.4)
2. Sortir les ressorts du capuchon de la lampe. (Vig.4)
3. Pour enlever la lampe de la douille tourner ¼ de tour dans le sens contraire des aiguilles d'une montre et tirer. (Vig.4)
4. Réinstaller le capuchon jusqu'à la dernière rainure intérieure du boîtier. (Vig.6)

D. INSTALLATION DES ACCESSOIRES :

1. Enlever le capuchon du boîtier. (Vig.4)
2. Sortir les ressorts du capuchon de la lampe. (Vig.4)
3. Déposer la lentille sous les ressorts du capuchon et réinstaller le capuchon jusqu'à la dernière rainure intérieure du boîtier. (Vig.5 et 6)

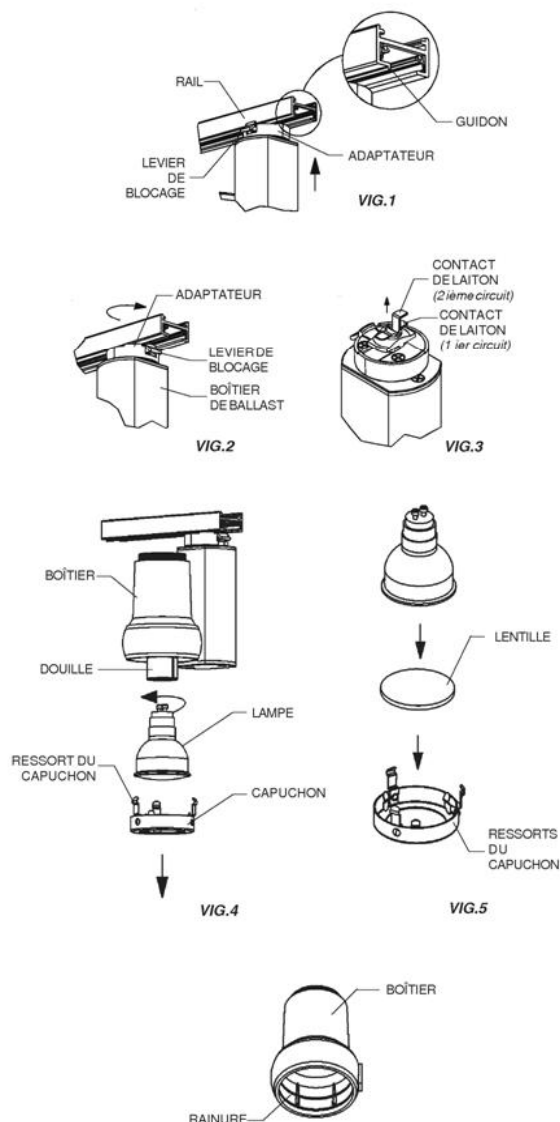

INSTRUCTIONS FOR INSTALLING MINI HID TRACK HEADS USING MT16 CMH LAMPS (GX10) BASE ONTO LYTESPAN TRACK SYSTEM

WARNING: Read and understand these instructions before installing fixture.

To prevent electrical equipment basic safety precautions must always be observed including the following. To prevent electrical shock, turn off electricity at fuse box before proceeding. To prevent electric shock, for proper operation and safety, this fixture must be grounded. To assure full compliance with local codes and regulations, check with your local electrical inspector before installation.

Retain these instructions for maintenance reference.

WARNING: For use with Lytespan system only.

Follow applicable laws for disposal of lamp containing mercury.

Note: Ensure that the electricity to the luminaire is cut prior to the installation or replacement of the lamp.

A. ADAPTER:

1. Insert the adapter into the track. Locking lever must be on the same side of track as bead. (Fig.1)
2. Rotate fixture adapter 90° with ballast housing until locking lever snaps and locks in place. (Fig.2)
3. To remove, depress locking lever, then rotate fitting 90° counterclockwise with ballast housing. (Fig.2)

B. ADAPTER: (double circuit)

1. The brass contact can be raised or lowered. The lowered position indicates a single circuit system, and the raised position indicates a double circuit. (Fig.3)

C. LAMP REPLACEMENT:

1. Remove the cap from the housing. (Fig.4)
2. Remove the cap springs from the lamp. (Fig.4)
3. To remove the lamp from the socket, turn it ¼ counterclockwise and pull. (Fig.4)
4. Place the cap into the inner most groove of the housing. (Fig.6)

D. ACCESSORY INSTALLATION:

1. Remove the cap from the housing. (Fig.4)
2. Remove the cap springs from lamp. (Fig.4)
3. Place the lens past the cap springs and onto cap. Install the cap into the inner most groove of the housing. (Fig.5 & 6)

