

CHLORIDE

by 

Exit/Emergency

6M/2M series

Thermoplastic emergency unit



Project: _____
Location: _____
Cat.No: _____
Type: _____
Lamps: _____ Qty: _____
Notes: _____

Example: 6M25WJ62ICT

Series/Battery		Housing Color	Lamp Heads	# of Heads	Model Designator	Options ³
6 VDC, Lead Calcium 6M12² – 12 W 6M25 – 25 W 6M36¹ – 36 W 6M50 – 50 W	12 VDC, Lead Calcium 2M25 – 25 W 2M36² – 36 W 2M50 – 50 W	W – White B – Black	12 VDC LED M7F MR16 7W white finish (equivalent to 35W incandescent lamp) *Optional lamp heads available.	Blank – No Lamp Heads 1 – One Lamp Head 2 – Two Lamp Heads 3 – Three Lamp Heads	Blank – Standard Non- Diagnostic Unit IC – Intelli-Charge Diagnostics	A – Ammeter ³ BD – Battery Disconnect Switch ³ DL – Damp Location Listed ³ F1 – 120 VAC Input Fuse ³ F2 – 277 VAC Input Fuse ³ P1 – 120 VAC Power Switch ³ P2 – 277 VAC Power Switch ³ TD – Time Delay, 15 Minutes ³ V – Voltmeter ³
6 VDC, Nickel Cadmium 6N25 – 25 W 6N50 – 50 W	12 VDC, Nickel Cadmium 2N25 – 25 W 2N50 – 50 W					

Accessories⁵ (order separately)

ICIR – Intelli-Charge Infra-Red Remote
PCS1 – Polycarbonate Vandal Shield
WG5 – Wire Guard

Footnotes

- ¹ Not available with DL option.
- ² Only available with non-diagnostic models.
- ³ Only available with Intelli-Charge models.
- ⁴ Some option combinations may impact UL listing, consult factory for specifics.
- ⁵ Consult Signify to confirm whether specific accessories are BAA-compliant.

codes and standards

- UL listed to Standard 924
- NFPA 70 (National Electric Code)
- NFPA 101 (Life Safety Code)
- IBC, BOCA, and OSHA illumination standard
- Optional damp location listing available (IC models only) 0°C to 40°C

construction

- Constructed of impact-resistant, UL 94 V-0, 5 VA thermoplastic. The cover assembly closes and remains secure via a snap fit design and offers tool free access to the housing interior.

installation

- Mounting is accomplished by means of the universal j-box mounting pattern or the keyhole knockouts provided on the rear of the housing.

non-diagnostic electronics

- Standard electronics systems include a 120/277 VAC dual tap input transformer. Standard electronic performance features include AC line latch, brownout detection, and low-voltage battery disconnect circuitry to maximize battery service life.

diagnostic electronics (IC models)

- 120/277 VAC dual voltage input with surge protection is standard on all models.
- All models feature the Intelli-Charge circuit where the charging system is microprocessor driven with software embedded diagnostic routine and temperature compensation.
- All models include brownout detection, AC lockout, low voltage disconnect, AC power indicator, charge status indicator, audible user-interface controls, visual LED system fault indicator, and tactile push-to-test switch.
- Additional equipment safety features include reverse battery polarity detection and protection, and reverse utility power detection and protection.
- All models include an on-board IR receiver for use with the optional hand-held remote (ICIR).



6M/2M Thermoplastic emergency unit

12W-50W

lamps

- Illumination is accomplished with up to three lamp heads mounted on the top of the unit .
- Most often specified is Chloride's J series rectangular lamp heads that incorporate a high-performance parabolic reflector with a wedge base tungsten lamp allowing maximum spacing between units along a path of egress .

battery

- Maintenance free sealed lead calcium battery with 5 year life .
- Maintenance free sealed nickel cadmium battery with 10 year life .
- Provides a minimum of 90 minutes emergency illumination .

warranty

- Five full year warranty on electronics and unit (excluding lamps) .


options (IC models only)

- A – The ammeter option includes an analog meter electrically connected to the charging circuit for visual reference and indication of the current level being delivered to the battery .
- BD – The battery disconnect switch allows for the electrical switching between the battery and the connected load (lamp heads) whether they be directly mounted to the equipment or installed as remote lamp heads . The switch will be located internally to the equipment and is not made accessible other to those who perform maintenance on the equipment .
- DL – Damp location listed products include various levels of corrosion protection on printed circuit board assemblies and other metallic parts . Environmental testing throughout a range of ambient temperature and 88% relative humidity .
- F1 – The AC fuse option includes an in-line fuse on the primary winding of the input transformer for additional electronic protection against utility surges or spikes limited to 120 VAC circuits .
- F2 – The AC fuse option includes an in-line fuse on the primary winding of the input transformer for additional electronic protection against utility surges or spikes limited to 277 VAC circuits .
- P1 – The AC power switch option includes a toggle switch electrically connected to the primary of the input transformer limited to 120 VAC circuits . This option allows for opening the utility feed to the equipment for servicing or maintenance .
- P2 – The AC power switch option includes a toggle switch electrically connected to the primary of the input transformer limited to 277 VAC circuits . This option allows for opening the utility feed to the equipment for servicing or maintenance .
- TD – The time delay circuit causes the emergency lighting equipment to remain under battery power for a period of 15 minutes after the utility power has been restored .
- V – The voltmeter option includes an analog meter electrically connected between the battery and lamp load for visual reference and indication of the battery terminal voltage when the equipment is operating in the emergency mode .

6M/2M Thermoplastic emergency unit


12W-50W

dimensions

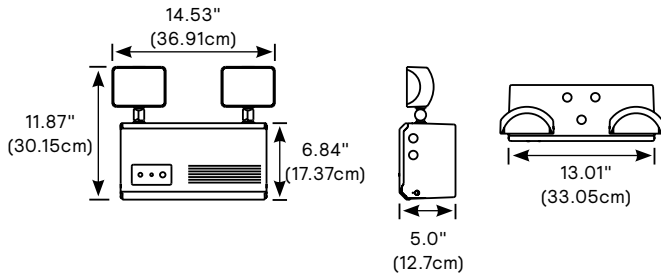

Meets Life Safety Code illumination standard: average of 1.0 FC, no point less than 0.1 FC, max to min ratio of 40:1. Assumes open space with no obstructions, mounting height: 7.5' and reflectances: 80/50/20. Analysis based on independently tested photometrics.

Wall mounted 7.5' AFF, 'J9' 6 V 9 W Tungsten Lamps Represented

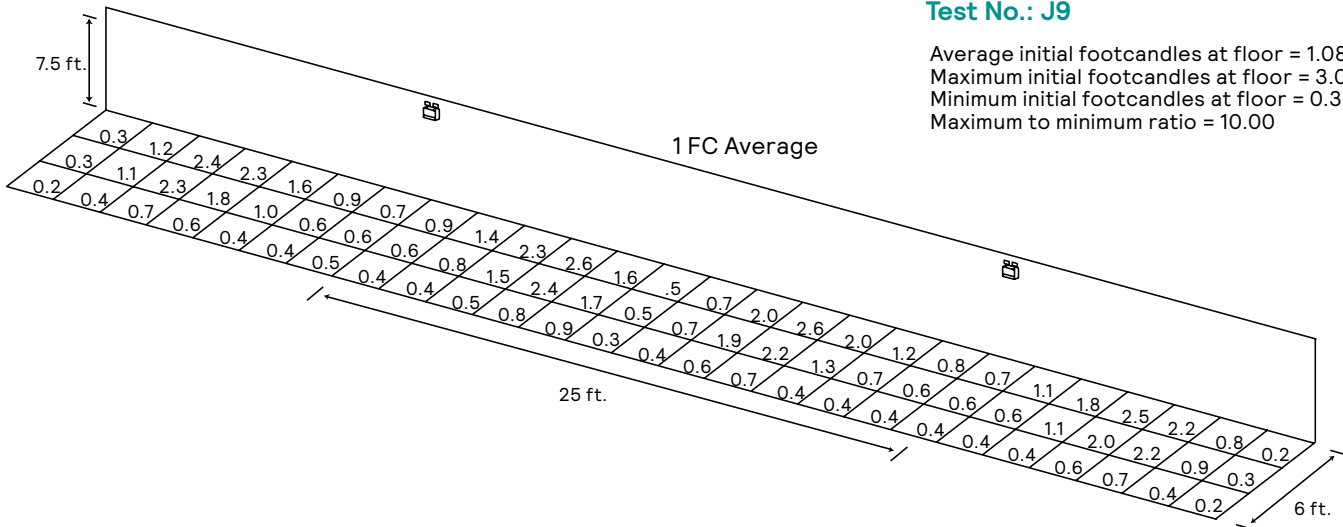

Buy American Act of 1933 (BAA):

This product is manufactured in one of our US factories and, as of the date of this document, this product was considered a commercially available off-the-shelf (COTS) item meeting the requirements of the BAA. This BAA designation hereunder does not address (i) the applicability of, or availability of a waiver under, the Trade Agreements Act, or (ii) the "Buy America" domestic content requirements imposed on states, localities, and other non-federal entities as a condition of receiving funds administered by the Department of Transportation or other federal agencies. Prior to ordering, please visit www.signify.com/baa to view a current list of BAA-compliant products to confirm this product's current compliance.

