


RVP150/RVP250/RVP350 conTempo Floodlight /conTempo 投光灯

Installation Instruction 安装说明

conTempo-PC100



Dimensions 尺寸

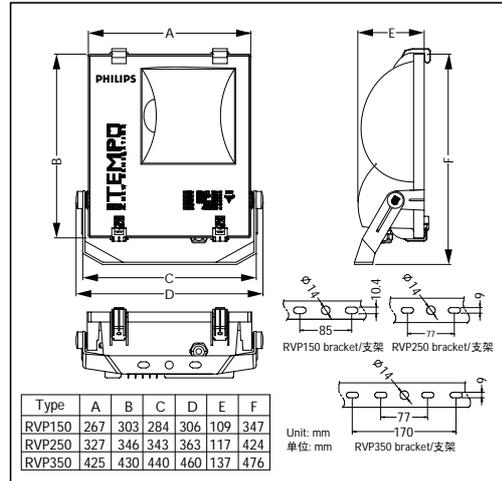


Installation 安装应用


1. Windage angle 迎风角度

Windage area
迎风面积


RVP150 max. 0.08m²
RVP250 max. 0.102m²
RVP350 max. 0.165m²




2. Wall installation 墙壁安装



3. Corner installation 角落安装




4. Canopy installation 篷顶安装




Making conTempo ready for mounting 准备安装


- 1 Unclench the four clip by a suitable tool
用工具打开四个搭扣





- 2 Pull up the two clips as shown and lift the glass gently
捏住图示的两个搭扣,小心地提起玻璃



- 3 Open the glass by rotating it gently
抓住玻璃的另一端将其打开




- 4 Affix the suitable lamp gently
小心地装上合适的光源

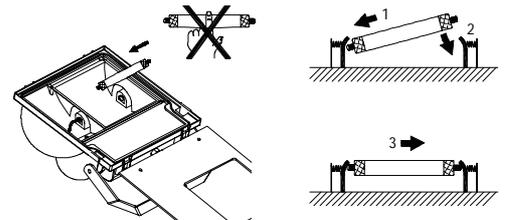



Wire connection 接线

- 1 Unscrew the clamp as shown
松开所示压线板的螺钉




- 2 Insert power cord through the grommet, the clamp, and then into the terminal block; tighten the screws as shown
将电源线穿过防水接头,压线板,然后插入接线座;再把图示的五颗螺钉拧紧









6mm ≤ ϕ ≤ 10mm
External cable/外部接线:
60245IEC57 3x1.0mm²

- 3 Fix the grommet tightly
将防水接头帽拧紧



Making conTempo ready for use 安装使用

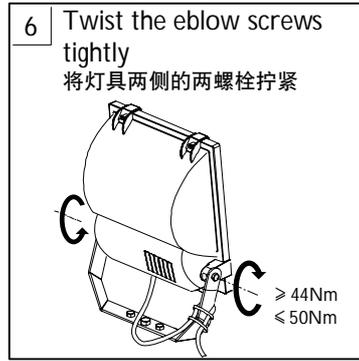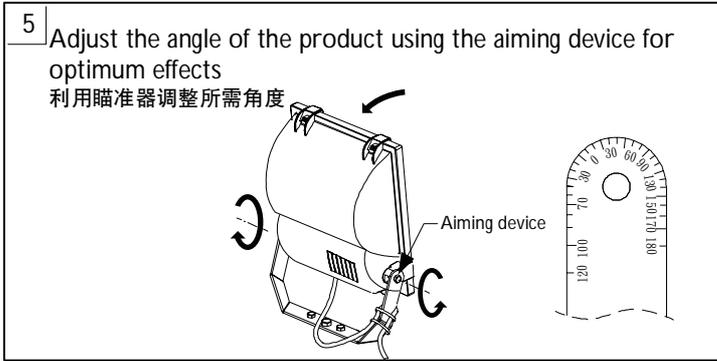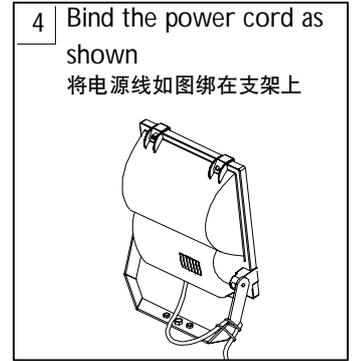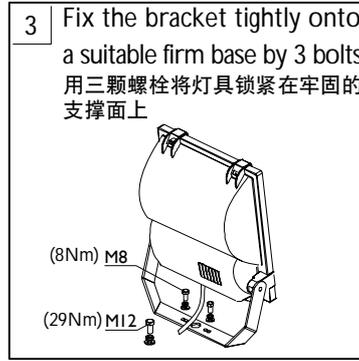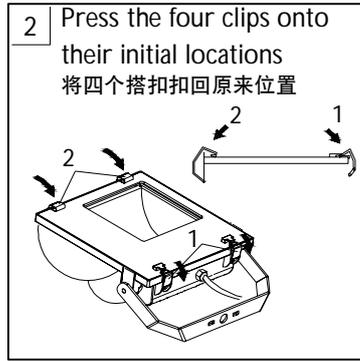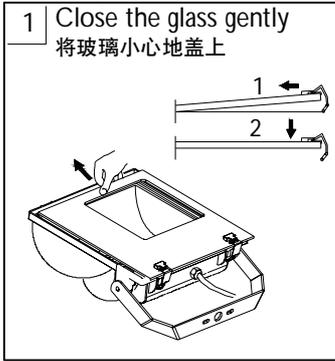

Maintenance 保养方法

1. In order to ensure optimum performance, please clean the luminaire regularly (recommended twice a year). While cleaning the luminaire, please use a soft cotton pad only.

为了保持灯具明亮效果, 请定期 (半年一次) 进行清洁。灯具清洁时请使用软布擦拭。

2. Don't use chemical solvents to clean the luminaire, it might damage the painted surface.

请勿使用任何化学溶剂擦拭灯具表面, 否则可能会对灯具喷涂表面造成腐蚀或变色。

3. Please replace protective front glass immediately, in case of any crack/deterioration.

万一玻璃破裂或出现其它异常, 请立即更换玻璃。

4. The product is suitable for installing at an elevation not higher than 1500 meters.

本产品适合安装在海拔1500米以下。

5. Not suitable for usage in area's prone to hurricane and extreme winds (e.g. coastal area's, harbour, etc.).

本产品不适合安装在海边、港口等强台风多发地区。

Caution: please shut off power before changing the lamp or maintenance.

注意: 更换光源或维护前, 请先切断电源。

用户资料

用户姓名: _____ 身份证号码: _____
地址: _____
联系电话: _____ 邮政编码: _____
产品名称: _____ 产品型号: _____
出售单位及地址: _____
购买日期: 年 月 日 发票号码: _____

飞利浦照明

上海办事处 上海市沪宜公路1805号 电话: 021-59151088 传真: 021-59151804 邮政编码: 201801	西安办事处 西安市南大街30号中大国际508室 电话: 029-87203516 传真: 029-87203633 邮政编码: 710002
北京办事处 北京建国门北大街华润大厦16层 电话: 010-85172288 传真: 010-85181203 邮政编码: 100005	成都办事处 成都市人民南路2段川信大厦28层 电话: 028-96199799 传真: 028-86200703 邮政编码: 610016
广州办事处 广州市越秀区中山三路33号 中华国际中心B塔18楼 电话: 020-83141682 传真: 020-83777543/83777542 邮政编码: 510055	武汉办事处 武汉市汉口建设大道568号 新世界国贸大厦35层02-03室 电话: 027-85560332 传真: 027-85793397 邮政编码: 430022
沈阳办事处 沈阳市和平区南京北街206号 城市广场第一座11层1103室 电话: 024-23341635 传真: 024-23341632 邮政编码: 110001	南京办事处 南京市汉中路2号 金陵饭店世界贸易中心6楼 电话: 025-86565688 传真: 025-84718215 邮政编码: 210005

仅限中国大陆地区

飞利浦灯具产品 专用说明书 保修条例

本公司保证该产品在正常使用及保养下能发挥其优越性能, 同时本公司将为持证用户提供一年之保修服务 (不含光源)。

1 自购买日起一年内, 凡经本公司维修人员确认为正常使用情况下因制造工艺或材料而导致的故障及损坏, 您都将获得免费门市保修服务;

2 此免费保修服务包括附件、辅助装置、运输费及维修人员上门服务费;

3 维修时, 保修证及发票正本或其他有效凭证同时使用方为有效;

4 以下情况将不能享受免费服务:

1) 接不适当电源, 使用不适当之安装而造成的损坏;

2) 非经本公司认可之维修和改装而造成的损坏;

3) 错误或疏忽使用或不适当配件而造成的损坏;

4) 因运输及其他意外而造成的损坏;

5 此证若经涂改即作废;

6 此证仅限在中国境内使用有效。

顾客热线: 8008201201

飞利浦灯具 (上海) 有限公司

仅限中国大陆地区

符合国标 GB7000.7-2005, GB7000.1-2002

Suit for GB7000.7-2005, GB7000.1-2002

产品通过CQC认证 Pass CQC remark

认证号码: CQC05010014880

CQC No.: CQC05010014880

顾客免费热线: 8008201201 (限中国大陆地区)

Free charge service line: 8008201201 (For China)