



GreenSpace Gen5 Downlight/LED 筒灯

Mounting instruction/ 安装说明

444100007291





Type Des. 产品型号	Cut Out 开孔尺寸	Lum. Power 整灯功率	Lamp Power 光源功率	Voltage 电压	Frequency 频率	Class 灯具类别		Ipeak (A)	Duration (μs)	Touch current(mA)	MCB Type B I6A	MCB Type C I6A
DN390B PSD (DALI-VLC)	D100	8W	6.0W	220-240V	50/60Hz	I	0.80	20.40	195.00	0.70	24.00	40.00
DN391B PSD (DALI-VLC)	D100	11.5W	9.6W	220-240V	50/60Hz	I	0.80	20.40	195.00	0.70	24.00	40.00
DN391B PSD (DALI-VLC)	D150	11.5W	9.6W	220-240V	50/60Hz	I	0.93	20.40	195.00	0.70	24.00	40.00
DN392B PSD (DALI-VLC)	D150	15.5W	13.0W	220-240V	50/60Hz	I	0.93	20.40	195.00	0.70	24.00	40.00
DN392B PSD (DALI-VLC)	D200	15.5W	13.0W	220-240V	50/60Hz	I	1.20	20.40	195.00	0.70	24.00	40.00
DN393B PSD (DALI-VLC)	D200	20.5W	19.2W	220-240V	50/60Hz	I	1.20	20.40	195.00	0.70	24.00	40.00
DN392B POE	D150	14.5W	13.0W	53Vdc	NA	III	1.30	NA	NA	NA	NA	NA
DN393B POE	D200	20.5W	19.2W	53Vdc	NA	III	1.53	NA	NA	NA	NA	NA



For PoE Master Function, purchase DN58X PoE sensor accessory from PHILIPS.
对PoE Master功能, 请从PHILIPS购买DN58X PoE传感器。

Type Number 产品型号	Cut Out 开孔尺寸	A(mm)	B(mm)
DN390B/DN391B	105~110mm	98	φ120
DN391B/DN392B	150~155mm	100	φ162
DN392B/DN393B	200~205mm	108	φ216

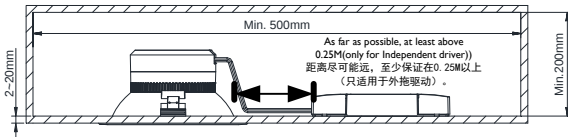

1

a

b

Type Number 产品型号	Cut Out 开孔尺寸	Detail Dimension 详细尺寸(mm)
DN390B/DN391B	D100	105~110mm
DN391B/DN392B	D150	150~155mm
DN392B/DN393B	D200	200~205mm

2

a

b

Class III POE driver/POE驱动。


The maximum length of the cable to be 20 meters.
网线最大长度建议为20m。

Plug in RJ45 Ethernet wire (CAT5E or CAT6 cable).
接上RJ45网线(超五类或者六类)。

- Recommended Switch models/推荐使用:
Cisco, WS-C3850-24U-L; Huawei, S5720-16X-PWH-LI-AC
- Driver model: PHILIPS POELC25W/02

3

Class I: PSD (DALI-VLC) driver/PSD (DALI-VLC) 驱动

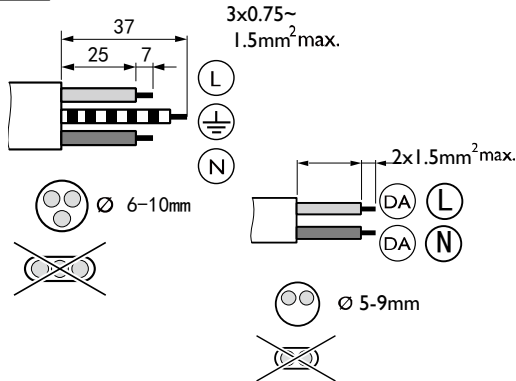

a

b

c

d

e

f

g

h

i

j

k

l

m

n

o

p

q

r

s

t

u

v

w

x

y

z

aa

ab

ac

ad

ae

af

ag

ah

ai

aj

ak

al

am

an

ao

ap

aq

ar

as

at

au

av

aw

ax

ay

az

ba

bb

bc

bd

be

bf

bg

bh

bi

bj

bk

bl

bm

bn

bo

bp

bq

br

bs

bt

bu

bv

bw

bx

by

bz

ca

cb

cc

cd

ce

cf

cg

ch

ci

cj

ck

cl

cm

cn

co

cp

cq

cr

cs

ct

cu

cv

cw

cx

cy

cz

da

db

dc

dd

de

df

dg

dh

di

dj

dk

dl

dm

dn

do

dp

dq

dr

ds

dt

du

dv

dw

dx

dy

dz

ea

eb

ec

ed

ee

ef

eg

eh

ei

ej

ek

el

em

en

eo

ep

eq

er

es

et

eu

ev

ew

ex

ey

ez

fa

fb

fc

fd

fe

ff

fg

fh

fi

fj

fk

fl

fm

fn

fo

fp

fq

fr

fs

ft

fu

fv

fw

fx

fy

fz

ga

gb

gc

gd

ge

gf

gg

gh

gi

gj

gk

gl

gm

gn

go

gp

gq

gr

gs

gt

gu

gv

gw

gx

gy

gz

ha

hb

hc

hd

he

hf

hg

hh

hi

hj

hk

hl

hm

hn

ho

hp

hq

hr

hs

ht

hu

hv

hw

hx

hy

hz

ia

ib

ic

id

ie

if

ig

ih



1. The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.
灯具应由有资格的电工安装，接线要符合IEE电气标准或国家标准。
2. The luminaire shall, under no circumstance, be covered with thermal insulation matting or similar material.
此灯具不适合被隔热衬垫或类似材料覆盖
3. Do not switch on before complete installation.
接线过程中，切勿通电。
4. For non-user replaceable light sources:
对非使用者替换光源：
The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person."
此灯具内的光源应由制造商或其服务代理商或一个有类似资格的人来更换。
5. The corrosive atmosphere or hazardous materials such as sulfur, chlorine, phthalate, etc must be avoided during the use and storage.
灯具避免在腐蚀性环境或者含有有害物质，例如硫化物，卤化物，邻苯二甲酸酯等环境中存储和使用。