



PHILIPS

LuxSpace Accent Mini, Compact


RS730B, RS731B
RS740B, RS741B

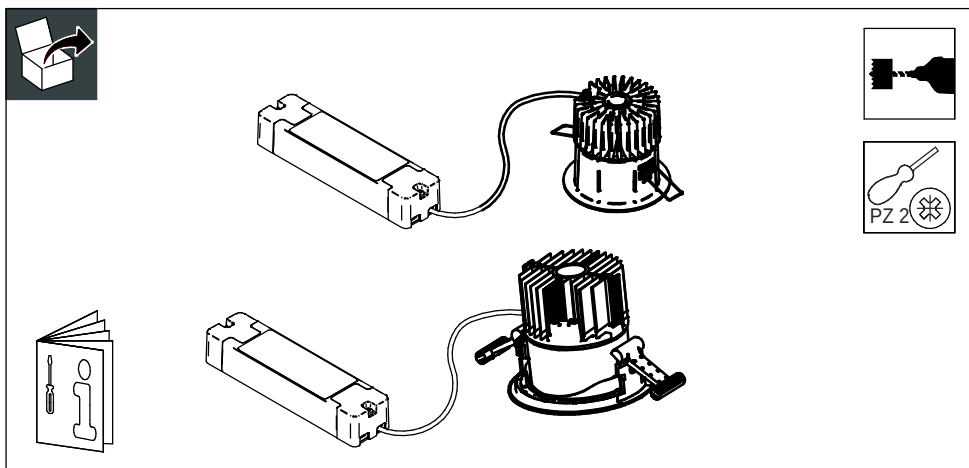


		P (W) / Color temperature				kg	φ mm	IP20 IP44	IP20	IKxx	Beam angle			
		PW9	CRW	CH	FMT						NB	MB	WB	VWB
RS730 B Mini, Fixed	LED12S		14,6			0,54	82	x		02		x	x	x
	LED14S		23,5			0,54	82	x		02	x			
RS731B Mini,	LED12S		14,6			0,56	100		x	02		x	x	x
	LED14S		23,5			0,56	100		x	02	x			
RS740 B Compact, Fixed	LED15S		24,5			0,76	93	x		02	x			
	LED17S	16,2	19,4	23,5		0,76	93	x		02		x	x	x
	LED19S				26,5	0,76	93	x		02				
	LED27S	28	32			0,76	93	x		02		x	x	x
	LED39S	39,5				0,76	93	x		02		x	x	x
	LED49S	54				0,74	93	x		02		x	x	x
	LED20 S	26				0,76	93	x		02	x			
	LED15S		24,5			0,76	120		x	02	x			
RS741B Compact, Adjustable	LED17S	16,2	19,4	23,5		0,76	120		x	02		x	x	x
	LED19S				26,5	0,76	120		x	02				
	LED27S	28	32			0,76	120		x	02		x	x	x
	LED39S	39,5				0,76	120		x	02		x	x	x
	LED49S	54				0,74	120		x	02		x	x	x
	LED20 S	26				0,76	120		x	02	x			

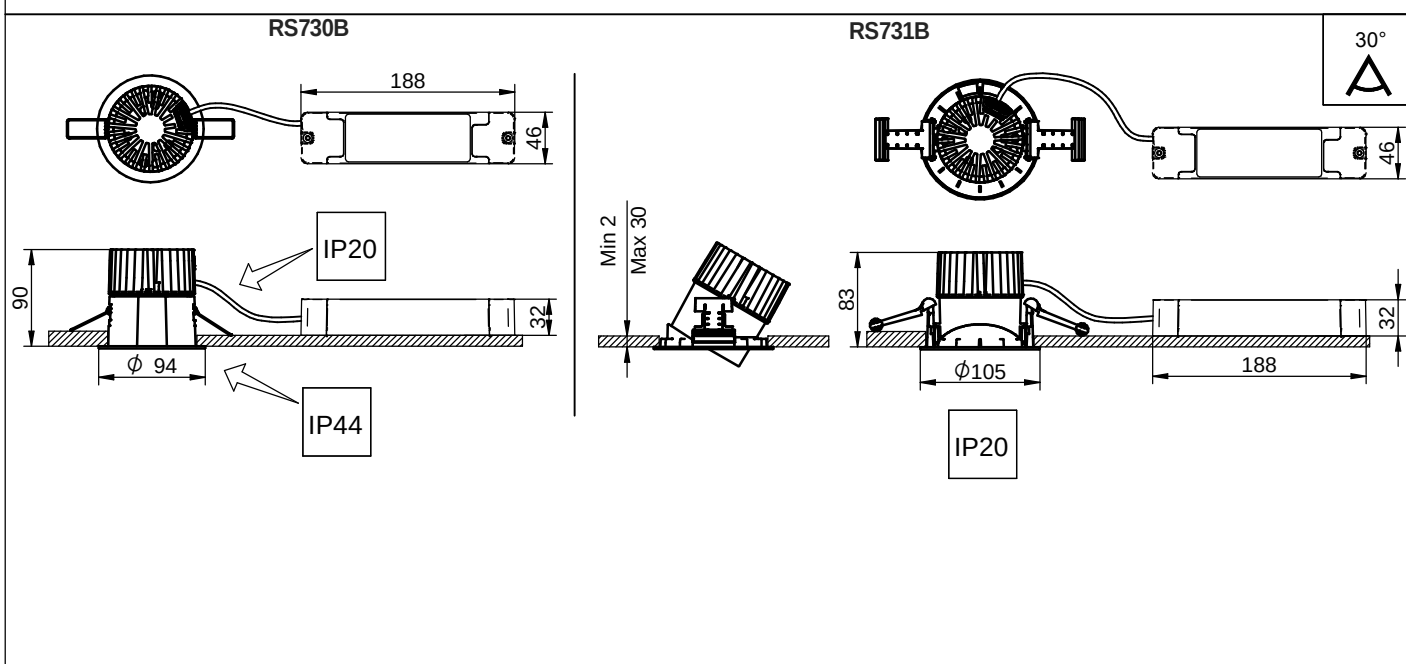

RS740B


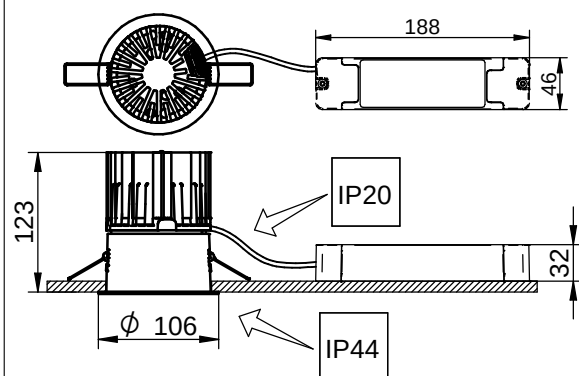


RS741B

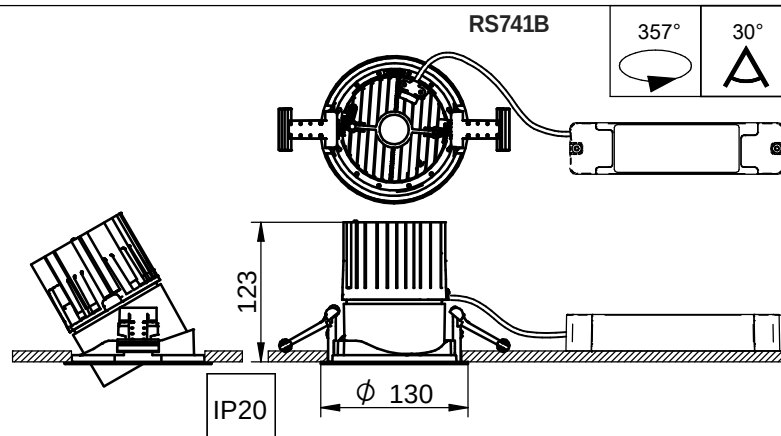

Minimal built-in dimensions



TYPE	L (mm)	W (mm)	H (mm)
RS730B, RS731B	700	350	150
RS740B, RS741B	900	400	265

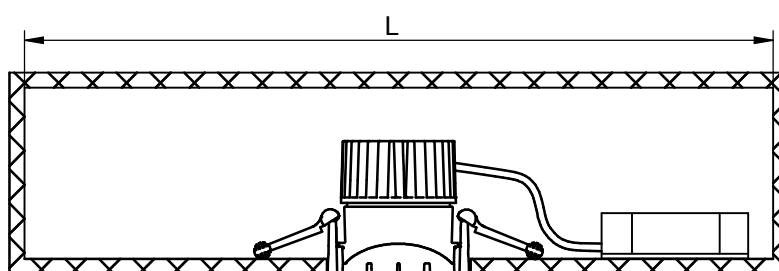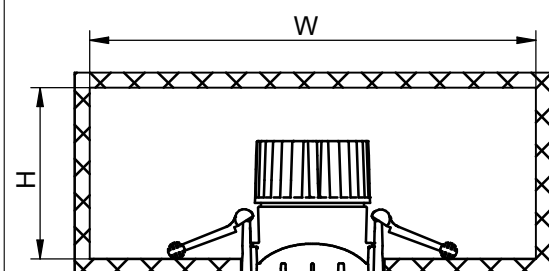

1a

 ϕ see table on 1st page $+2$
 -0



1b




2a

PSU-E


Mains cable


 Min $2 \times 0.2 \text{ mm}^2$
Max $2 \times 1.5 \text{ mm}^2$



PSED-E WH

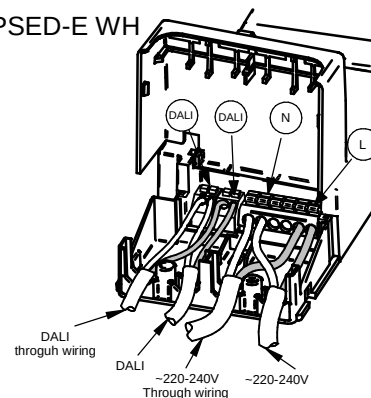

Mains cable


 Min $2 \times 0.5 \text{ mm}^2$
Max $2 \times 2.5 \text{ mm}^2$

DALI cable


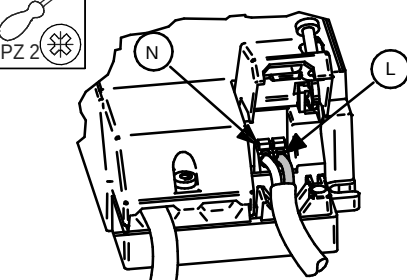

 Min $2 \times 0.5 \text{ mm}^2$
Max $2 \times 2.5 \text{ mm}^2$


Cable to LED module


~220-240V

PSED-E LH


DALI cable


 Min $2 \times 0.2 \text{ mm}^2$
Max $2 \times 1.5 \text{ mm}^2$

 Min $2 \times 0.2 \text{ mm}^2$
Max $2 \times 1.5 \text{ mm}^2$


Mains cable


 Min $2 \times 0.2 \text{ mm}^2$
Max $2 \times 1.5 \text{ mm}^2$


PSE-E LH




~220-240V




2b

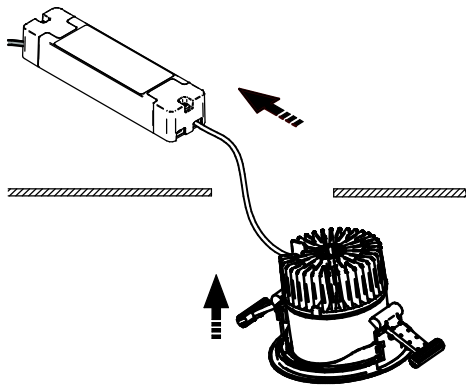





3a

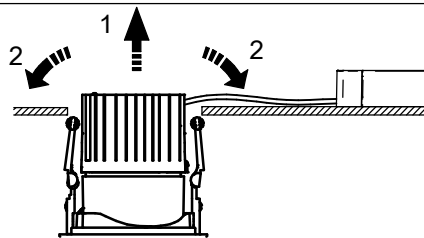

3b

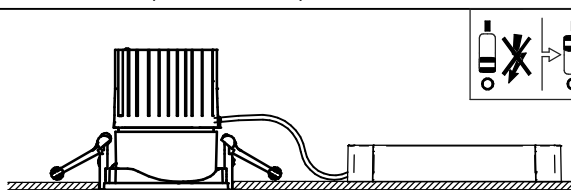


3c

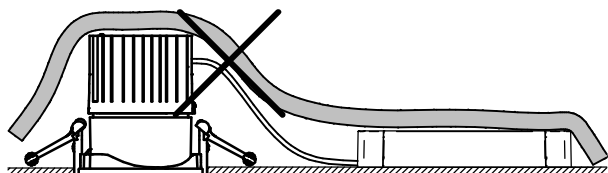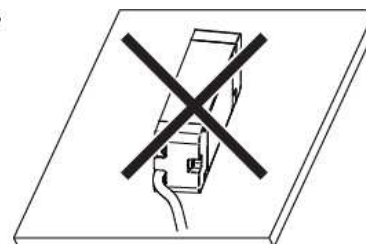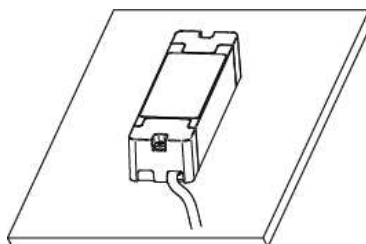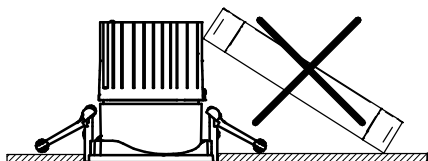



Luminaire must not cover with any thermally insulating material.

Titanium 36W LH 0.3-1A 48V I 230V (PSE-E)			Titanium 36W WH 0.3-1A 54V TD/I 230V (PSED-E)			Titanium 50W LH 0.7-1.5A 48V 230V (PSE-E)			Titanium 50W LH 0.7-1.5A 48V TD/I 230V (PSED-E)			LED driver 36W 0.3-1A 48V I 230V (PSU-E)		
Lum. Pack	CCT	Inom. (A)	Lum. Pack	CCT	Inom. (A)	Lum. Pack	CCT	Inom. (A)	Lum. Pack	CCT	Inom. (A)	Lum. Pack	CCT	Inom. (A)
LED14S	CRW	0,098	LED14S	CRW	0,098	LED49S	PW9	0,231	LED49S	PW9	0,231	LED17S	CH	0,103
LED15S	CRW	0,103	LED15S	CRW	0,103							LED19S	FMT	0,114
LED27S	PW9	0,121	LED17S	CH	0,102									
LED39S	PW9	0,176	LED19S	FMT	0,111									
LED20S	PW9	0,113	LED27S	PW9	0,121									
			LED39S	PW9	0,176									
			LED20S	PW9	0,113									
I _{max.} (A)	14,5		I _{max.} (A)	5,3		I _{max.} (A)	23,5		I _{max.} (A)	5,3		I _{max.} (A)	5,3	
T _{ref.} (ms)	0,22		T _{ref.} (ms)	0,7		T _{ref.} (ms)	0,272		T _{ref.} (ms)	0,7		T _{ref.} (ms)	0,7	
MCB	Max. Products (pcs)*		MCB	Max. Products (pcs)*		MCB	Max. Products (pcs)*		MCB	Max. Products (pcs)*		MCB	Max. Products (pcs)*	
B-10A	20		B-10A	15		B-10A	15		B-10A	18		B-10A	25	
B-16A	32		B-16A	24		B-16A	24		B-16A	30		B-16A	40	
C-10A	33		C-10A	24		C-10A	24		C-10A	31		C-10A	41	
C-16A	54		C-16A	40		C-16A	40		C-16A	51		C-16A	67	


Titanium 20W 0.15-0.5A 48V Is 230V (PSE-E)			Titanium 20W LH 0.15-0.5A 48V TD/Is 230V (PSED-E)		
Lum. Pack	CCT	Inom. (A)	Lum. Pack	CCT	Inom. (A)
LED12S	CRW	0,063	LED12S	CRW	0,063
LED17S	CRW	0,092	LED17S	CRW	0,092
LED17S	PW9	0,071	LED17S	PW9	0,071
I _{max.} (A)	14,5		I _{max.} (A)	5,3	
T _{ref.} (ms)	0,22		T _{ref.} (ms)	0,7	
MCB	Max. Products (pcs)*		MCB	Max. Products (pcs)*	
B-10A	18		B-10A	15	
B-16A	30		B-16A	24	
C-10A	31		C-10A	24	
C-16A	51		C-16A	40	

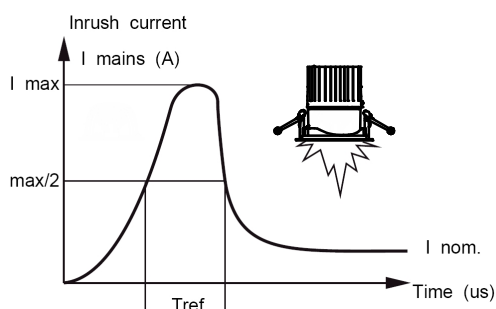

Reflector and fixed housing accessory changing instructions

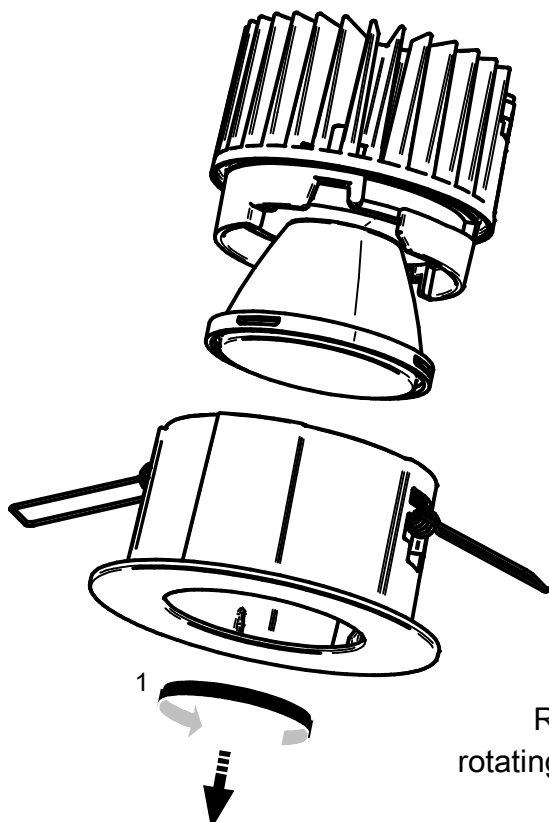


4a

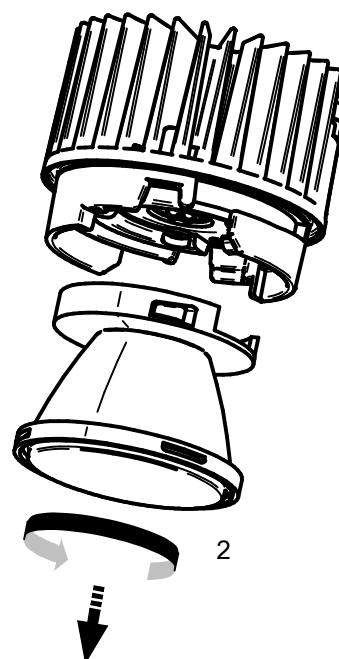


4b

Release the parts by
rotating them counter clockwise

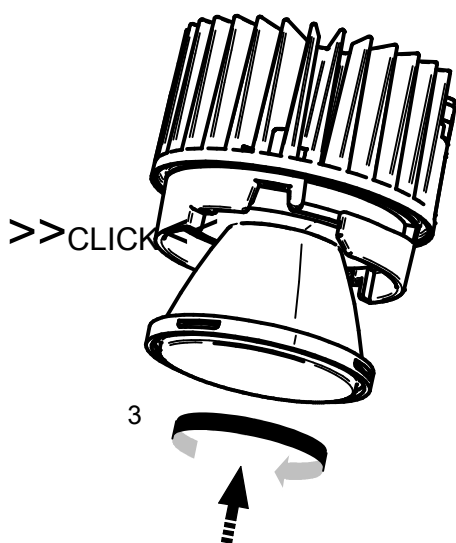


4a

Insert the new reflector
and turn clockwise



Only with soft clothes!
Do not push hard!

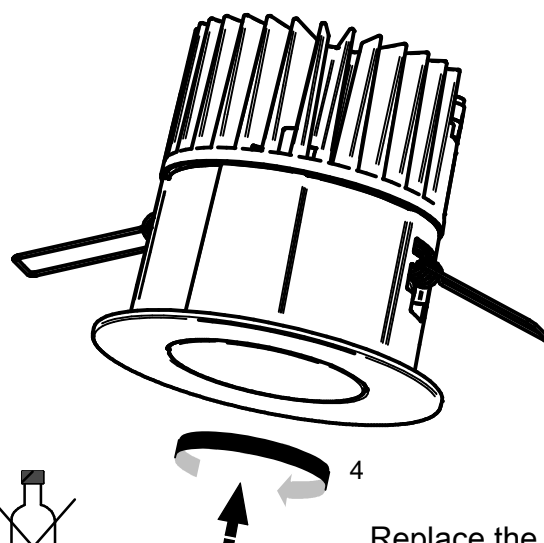

4b

Replace the new housing
and turn clockwise

© 2016 Philips Lighting Holding B.V.

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Philips Lighting Holding B.V.
The Netherlands

