

INSTALLATION INSTRUCTIONS FOR TRIM IN A LYTECASTER PRE-WIRED MOUNTING FRAME

ATTENTION: Read and understand these instructions before installing fixture. To prevent electrical shock, turn off electricity at fuse box before proceeding. Retain these instructions for maintenance reference.

Note: With Lytecaster or Lytening-Renovation mounting frame, the trim cannot be installed in a ceiling of more than 1" inch thick.






FIG.1




FIG.2

A. ROTO-CLIP FASTENERS:

1. Turn the *tab* towards the opening. (Fig.1)

B. PREPARATION:

1. Remove the *trim* by pulling it down. (Fig.2)

C. REFLECTOR/ HOUSING:

1. Screw the *extension socket* into the socket. (Fig.3)

ELYTE model:

- 2a. Align the *socket cup* over the opening in the *reflector*, squeeze it and snap it into place. (Fig.4)

LYTECASTER model:

- 2b. Compress the *spring* and snap it into the *slots* on the *reflector*. (Fig.5)




FIG.3




FIG.4

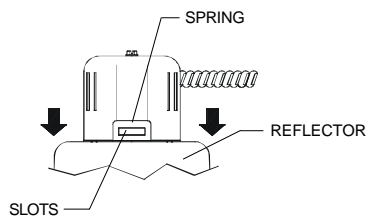


FIG.5




FIG.6

D. HOUSING:

1. Push the *housing* into the ceiling. (Fig.6)
2. Turn the *housing* slightly clockwise to adjust it. (Fig.7)
3. Align the *T slot* with a *fastener*. (Fig.8)
To secure, tighten a screw through the fastener opening. (screw included) (Fig.8)




FIG.7




FIG.8

E. LAMP:

1083 Model: PAR30 lamp

1183 Model: PAR38 lamp

1. Insert the lamp into the socket.
2. Slide the *lamp* flange under the *spring*. (Fig.9)

F. TRIM: (1083)

1. Aim the *lamp* beam. (Fig.10)
2. Push the *trim* into the housing by pressing on the (2) *springs*. (Fig.10)
3. Adjust the beam angle. (Fig.10)




FIG.9




FIG.10