


TCS398

Mounting instruction 安装说明


4441 000 63401a



Housing (Type) 功率/型号	Length A 长度 (mm)	Cable Suspension B 悬吊安装孔距 (mm)	Surface Mounting D 吸顶安装孔距 (mm)	Pole Fixing C 吊杆间距 (mm)
36W (TL-D)	1310	1240	1263	600
58W (TL-D)	1610	1540	1563	600
28/54W (TL-5)	1258	1188	1211	600
35/49W (TL-5)	1558	1488	1511	600

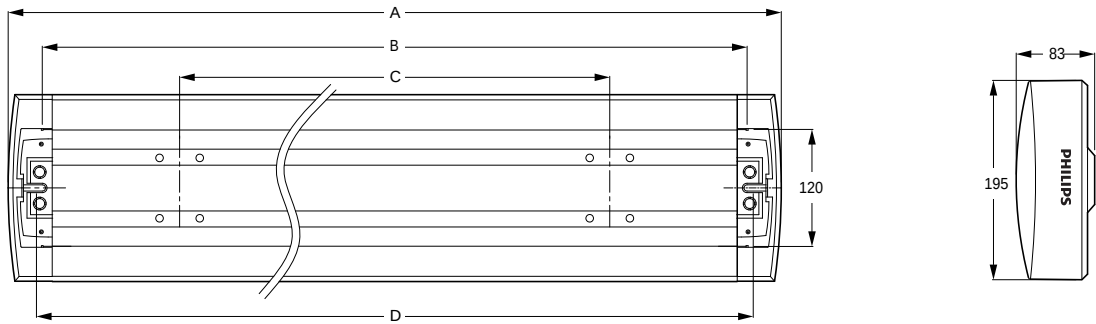

TCS398 Suspension Mounting
using unit of ZPH 300 US
TCS398 悬吊式安装，
应用配件 ZPH 300 US

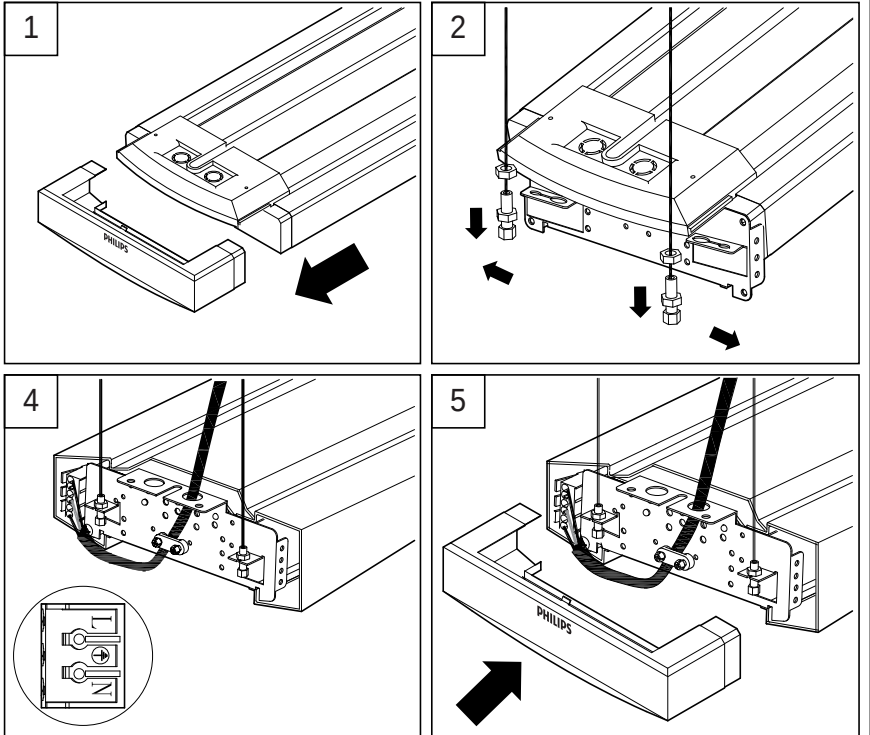


Philips Lighting Luminaires (Shanghai) Co., Ltd.
Address: No. 2688, Huyi Road, Jiading, Shanghai, China
Postalcode: 201801
飞利浦灯具（上海）有限公司
地址：中国上海市嘉定区马陆镇沪宜公路2688号
邮编：201801

PHILIPS


Surface Mounting
TCS398 吸顶安装

2


The distance of surface mounting refer to D
吸顶安装距离参考D

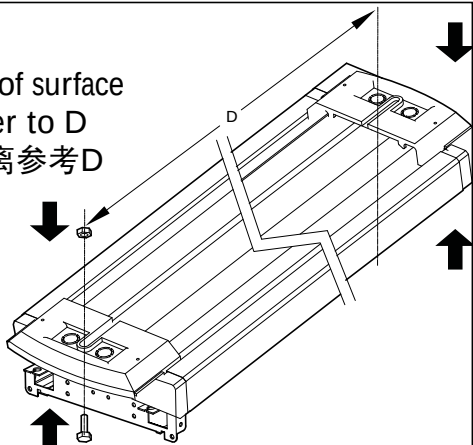

1

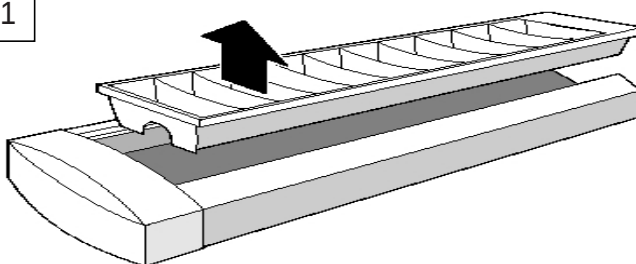


3

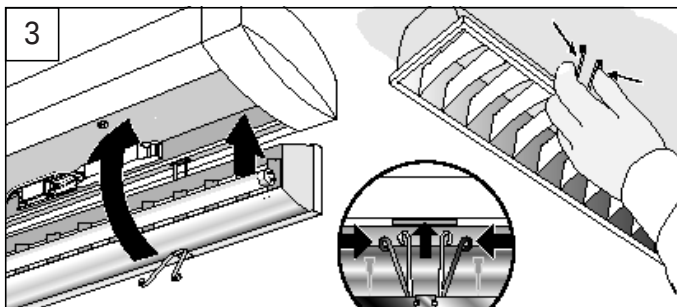


Note: For type (TCS398 xxx xxx A) version the mounting way is only suitable for pole fixing.
注意：对于型号为(TCS398 xxx xxx A)的非对称配光灯具，仅适用吊杆安装。

TCS398 Pole mounting way
using the unit of ZPS398 CB-S
TCS398吊杆安装方式，
应用配件ZPS398 CB-S

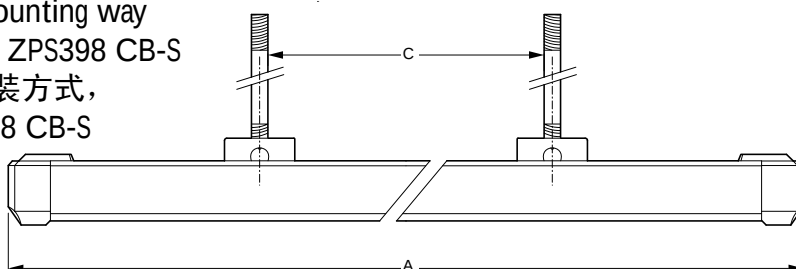


1


Fixing the pole to ceiling surface
将吊杆安装到顶部

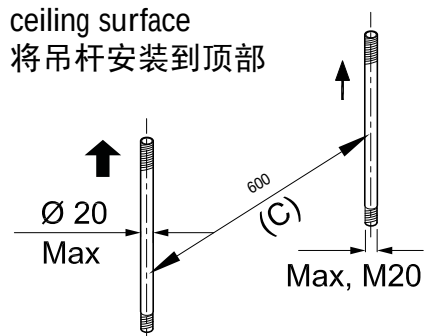



2

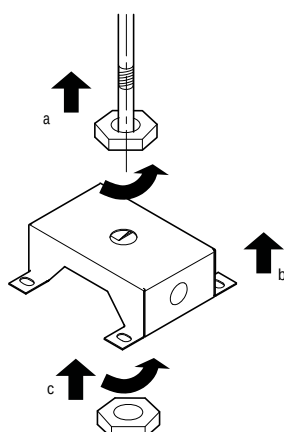

3

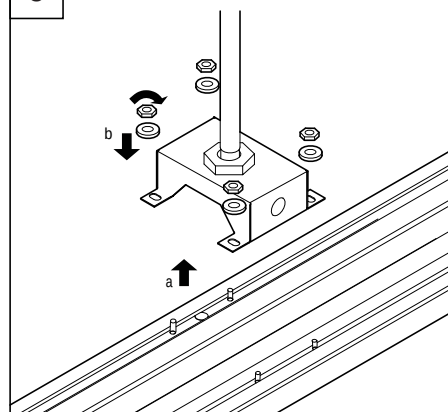

4

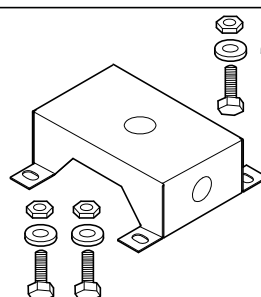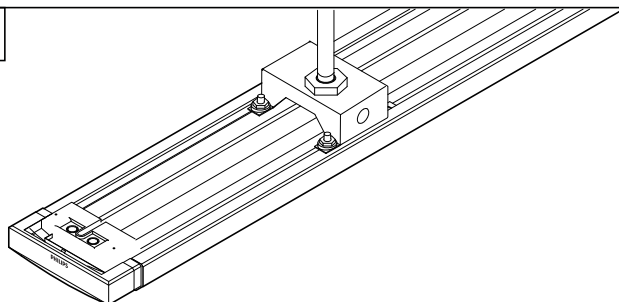


Pole mounting unit:
ZPS398 CB-S
吊杆安装配件:
ZPS398 CB-S
12NC:
9104 033 13880




Note: Normally the pole not provided by Philips.
注意：吊杆客户自备。


Continue (link) installation TCS398 连续安装

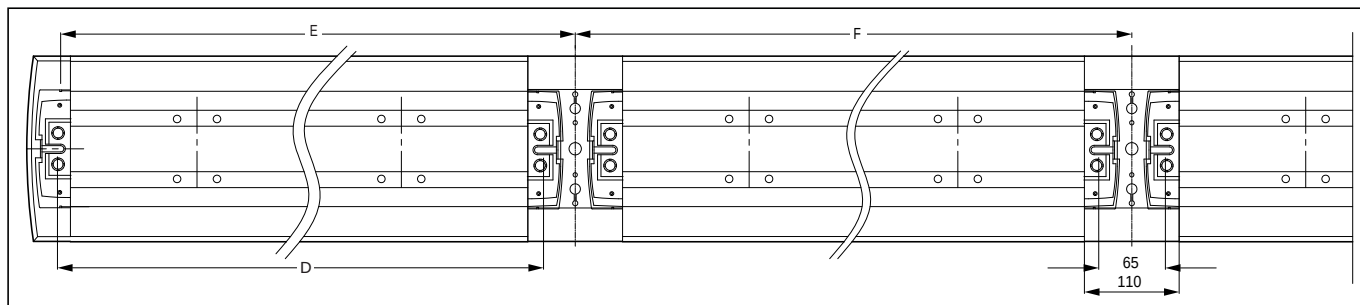

Housing (Type) 功率/型号	Cable Suspending E 吊绳安装间距 (mm)	Cable Suspending F 吊绳安装间距 (mm)	Surface Mounting D 吸顶安装孔距 (mm)
36W (TL-D)	1283	1328	1263
58W (TL-D)	1583	1638	1563
28/54W (TL-5)	1232	1276	1211
35/49W (TL-5)	1532	1576	1511

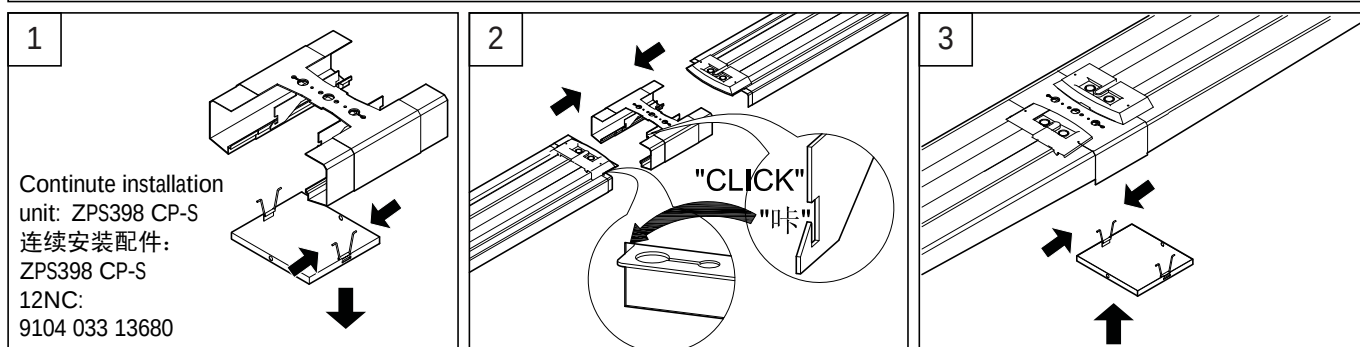

Suspension installation unit ZPH300 US 悬吊配件 12NC: 9104 033 01880

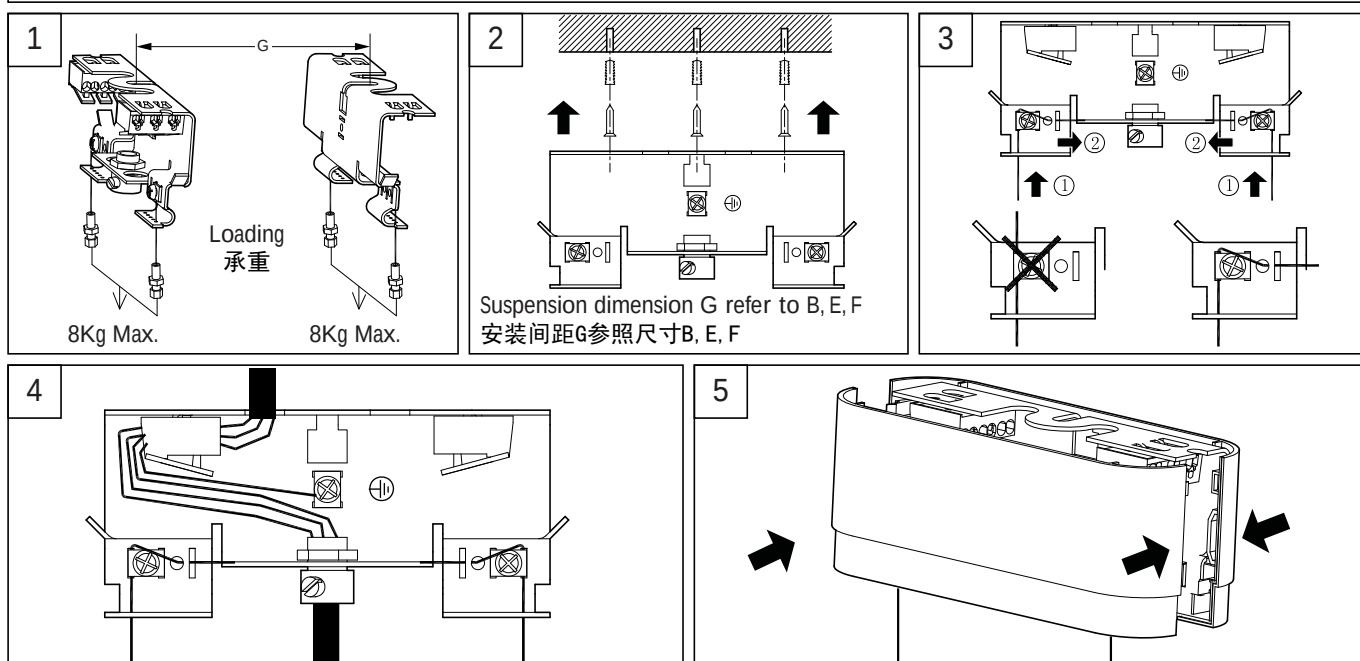

- The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.
灯具应由有资格的电工安装，接线要符合IEE电气标准或国家标准。
- The luminaire shall, under no circumstance, be covered with thermal insulation matting or similar material.
在任何情况下灯具都不能被隔热或类似材料覆盖。
- Please shut off power supply before changing lamp.
更换光源时请切断电源。