

The light source for money checking!

TL Mini Blacklight Blue

This TL Miniature lamp (tube diameter 16 mm) is made of blacklight blue (dark blue) glass, which transmits UV-A radiation, but gives only a minimum of visible light. It is a perfect solution for quick detection of UV-reflecting materials. It is used especially for testing, inspection and analysis in various branches of industry, e.g. criminology, philately and medicine. Furthermore, it is applied to create special effects in the entertainment industry, e.g. in nightclubs and theaters.

Benefits

- Quick detection of UV-reflecting materials
- · Creates special lighting atmospheres and effects

Features

· Straight outer envelope

Application


- Detection and analysis in the textile and chemical industries
- · Banking and forensic science
- Special effects in night clubs, discos and theatres, and sign lighting

TL Mini Blacklight Blue

Versions



Dimensional drawing

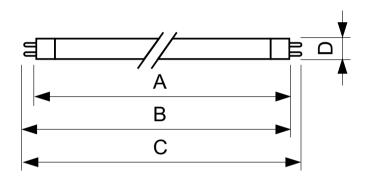

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL 8W BLB 1FM/10X25CC	16 mm	288.3 mm	295.4 mm	293.0 mm	302.5 mm
TL 4W BLB 1FM/10X25CC	16 mm	135.9 mm	143.0 mm	140.6 mm	150.1 mm

General Information	
Cap-Base	G5
Light Technical	
Colour Code	108
Colour Designation	Blacklight Blue
Mechanical and Housing	
Bulb Shape	T5

Operating and Electrical

		Lamp Current		Power (Rated)
Order Code	Full Product Name	(Nom)	Voltage (Nom)	(Nom)
928000010803	TL 4W BLB 1FM/	0.170 A	29 V	4.5 W
	10X25CC			

		Lamp Current		Power (Rated)
Order Code	Full Product Name	(Nom)	Voltage (Nom)	(Nom)
928001010803	TL 8W BLB 1FM/	0.145 A	56 V	7.1 W
	10X25CC			

General Information

Order Code	Full Product Name	Life To 50% Failures (Nom)
928000010803	TL 4W BLB 1FM/10X25CC	8000 h

Order Code	Full Product Name	Life To 50% Failures (Nom)
928001010803	TL 8W BLB 1FM/10X25CC	10000 h

Light Technical

TL Mini Blacklight Blue

Order Code	Full Product Name	LLMF 2000 h Rated	LLMF 6000 h Rated
928000010803	TL 4W BLB 1FM/10X25CC	25 %	35 %

Order Code	Full Product Name	LLMF 2000 h Rated	LLMF 6000 h Rated
928001010803	TL 8W BLB 1FM/10X25CC	20 %	30 %

