




CONNECTION BLOCK

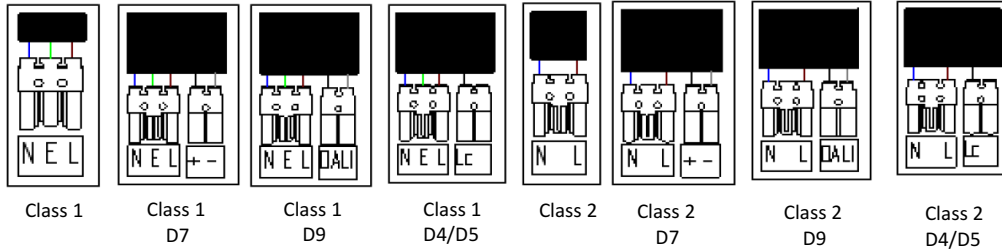


LUMISTEP

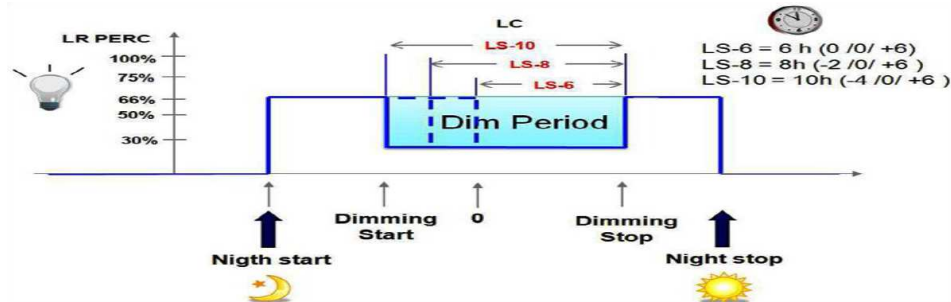

DynaDimmer

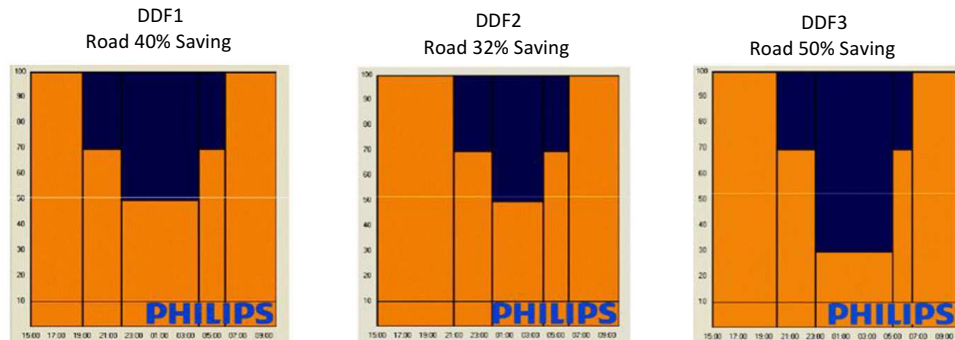

RF NODE - DALI

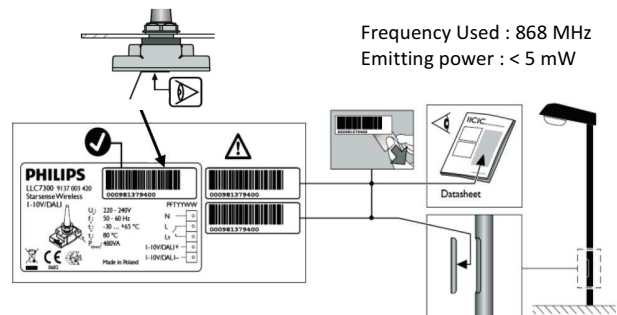

CE
R&TTE

Iridium² - BGP352 & BGP353

Mounting Instruction

Instructions de montage
Montageanleitung
Montage Instruktie
Istruzioni di montaggio


Instrucciones de montaje
Instrucces de montagem
Monteringsinstruktioner
Monteringsvejledning

Kokoonpano- ja Kiinnitysohjeet
Montaj yonergesi
Οδηγίες τήξεσσηθηθηX
Instrukcja montazu

Szerelési utasítások
Navod k montazi
bycnherwoz gi vijnf.e
Navod k montazi

				IP..			complies with...	Voltage		
BGP352	15 max	0,044 max	5-10m	66	I	II	IEC 60598	~220...240V		from -25°C to +25°C
BGP353	18 max	0,064 max	8-15m							

	BGP352	BGP353
H	183 mm	217 mm
W	358 mm	424 mm
L	751 mm	879 mm

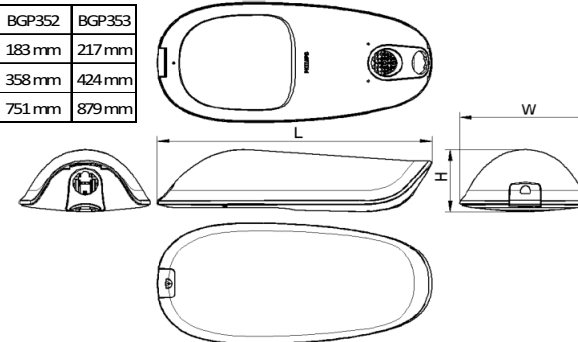

BGP 352- Iridium ² LED Medium						BGP 353- Iridium ² LED Large					
ENGINE	CT	LUM	W*	ENGINE	CT	LUM	W*	ENGINE	CT	LUM	W*
GRN16-3S	830	1600	16	ECO19-3S	830	1946	20	GRN72-3S	830	7200	67
GRN20-3S	740	1952	16	ECO28-3S	740	2832	25	GRN80-3S	830	8000	76
GRN24-3S	830	2400	24	ECO35-3S	830	3482	37	GRN88-3S	830	8800	82
GRN29-3S	740	2928	25	ECO42-3S	740	4248	36	GRN88-3S	740	8784	67
GRN32-3S	830	3200	31	ECO46-3S	830	4643	48	GRN96-3S	830	9600	88
GRN39-3S	740	3904	32	ECO57-3S	740	5664	50	GRN98-3S	740	9760	73
GRN40-3S	830	4000	39	ECO58-3S	830	5804	58	GRN104-3S	830	10400	96
GRN48-3S	830	4800	47	ECO70-3S	830	6965	71	GRN107-3S	740	10736	81
GRN49-3S	740	4880	39	ECO71-3S	740	7081	61	GRN112-3S	830	11200	104
GRN56-3S	830	5600	52	ECO81-3S	830	8125	80	GRN117-3S	740	11712	87
GRN59-3S	740	5856	46	ECO85-3S	740	8497	72	GRN120-3S	830	12000	113
GRN64-3S	830	6400	60	ECO93-3S	830	9286	93	GRN127-3S	740	12688	95
GRN68-3S	740	6832	52	ECO99-3S	740	9913	85	GRN128-3S	830	12800	121
GRN72-3S	830	7200	67	ECO104-3S	830	10447	106	GRN136-3S	830	13600	126
GRN78-3S	740	7808	60	ECO113-3S	740	11329	95	GRN137-3S	740	13664	103
GRN80-3S	830	8000	76	ECO116-3S	830	11608	113	GRN144-3S	830	14400	133
GRN88-3S	830	8800	82	ECO127-3S	740	12745	105	GRN146-3S	740	14640	113
GRN88-3S	740	8784	67	ECO128-3S	830	12769	126	GRN156-3S	740	15616	120
				ECO139-3S	830	13930	138	GRN166-3S	740	16592	128
				ECO142-3S	740	14161	119	ECO241-3S	740	24074	206
				ECO156-3S	740	15578	129	ECO255-3S	740	25490	217
								ECO269-3S	740	26906	230
								ECO283-3S	740	28322	239

W* Power consumption Ta= 25°C

220 - 240V
50 - 60Hz

Inrush Current
105A (230V) / 30µs



Disconnect before servicing
Mettre hors tension avant intervention
Öffnen nur spannungsfrei
Demonteren voor onderhoud

Togliere tensione prima di fare manutenzione
Desconectar antes de manipular
Bryt strömmen före lampbytte

The (1-10) controllers to use with this luminaire must provide SELV signals

12NC 4413 181 05974
Version Date - WK7/2015
Printed in Poland
Data subject to change without notice
www.philips.com/lighting

PHILIPS

PHILIPS

