

Philips UniStreet BGP203/204, BGS203/204

Mounting instruction

Instructions de montage
Montageanleitung
Montage instructie
Istruzioni di montaggio

Instrucciones de montaje
Instruções de montagem
Monteringsinstruktioner
Monteringsvejledning

Kokoonpano- ja kiinnitysohjeet
Montaj yönergəsi
Návod k montáži
Instrukcja montażu

Szerelési utasítások



LEDs

~220V...240V

50/60Hz









IEC

EN60598

4-6 m

IP66




IK08




Disconnect before servicing
Mettre hors tension avant intervention
Öffnen nur spannungsfrei
Demonteren voor onderhoud
Togliere tensione prima di fare manutenzione
Desconectar antes de manipular
Bryt strömmen före lampbyte

max
35°C
-30°C
min


			W +/-11%	 740 Inrush current	MCB B 16A			W +/-11%	 740 Inrush current	MCB B 16A		 830 Inrush current	MCB B 16A
LED12-C	5	11	15A/360µs	23	-	-	-	-	-	-	-	-	-
LED20-C	5	18	15A/360µs	23	-	-	-	-	-	-	-	-	-
LED30-C	5,3	26	27A/290µs	18	-	-	-	-	-	-	-	-	-
LED40-C	5,3	33	27A/290µs	18	-	-	-	-	-	-	-	-	-
LED50-C	5,6	42	80A/150µs	11	-	-	-	-	-	-	-	-	-
LED60-C	5,6	56	80A/150µs	11	-	-	-	-	-	-	-	-	-
LED80-C	7,5	74	80A/150µs	11	-	-	-	-	-	-	-	-	-
LED100-C	7,8	91	80A/150µs	11	-	-	-	-	-	-	-	-	-
LED120-C	8,1	109	108A/140µs	9	-	-	-	-	-	-	-	-	-
LED10-4S	5,3	8	27A/290µs	18	10	27A/290µs	18						
LED16-4S	5,3	12	27A/290µs	18	15	27A/290µs	18						
LED20-4S	5,3	15	27A/290µs	18	19	27A/290µs	18						
LED25-4S	5,3	18	27A/290µs	18	22	27A/290µs	18						
LED30-4S	5,3	21	27A/290µs	18	26	27A/290µs	18						
LED35-4S	5,8	24	80A/150µs	11	29	80A/150µs	11						
LED40-4S	5,8	27	80A/150µs	11	33	80A/150µs	11						
LED45-4S	5,8	30	80A/150µs	11	38	80A/150µs	11						
LED50-4S	5,8	34	80A/150µs	11	42	80A/150µs	11						
LED54-4S	5,8	40	27A/290µs	18	46	80A/150µs	11						
LED59-4S	5,8	41	80A/150µs	11	51	80A/150µs	11						
LED64-4S	5,8	44	80A/150µs	11	57	80A/150µs	11						
LED69-4S	5,8	48	80A/150µs	11	62	80A/150µs	11						
LED74-4S	5,8	52	80A/150µs	11	62	80A/150µs	11						
LED79-4S	5,8	56	80A/150µs	11	67	80A/150µs	11						
LED90-4S	5,8	61	80A/150µs	11	79	80A/150µs	11						
LED60-4S	7,5	40	46A/250µs	11	49	46A/250µs	11						
LED70-4S	7,5	47	46A/250µs	11	59	46A/250µs	11						
LED80-4S	7,5	54	46A/250µs	11	68	46A/250µs	11						
LED90-4S	7,5	61	46A/250µs	11	79	46A/250µs	11						
LED100-4S	8,1	62	53A/300µs	8	78	53A/300µs	8						
LED120-4S	8,1	76	53A/300µs	8	98	53A/300µs	8						
LED139-4S	8,1	90	53A/300µs	8	122	53A/300µs	8						
LED149-4S	8,1	99	53A/300µs	8	-	-	-						



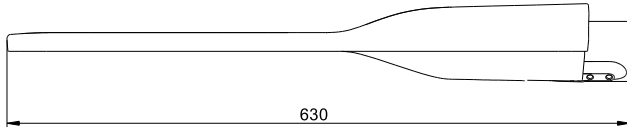630


$S = 0,033 \text{ m}^2$




270

$S = 0,021 \text{ m}^2$

BGP/BGS203
32/48A, 48/60A

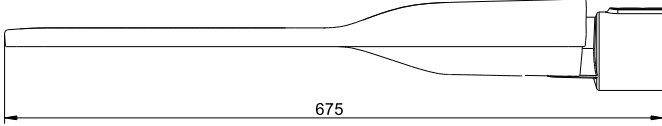


675




270

BGP/BGS203
76A

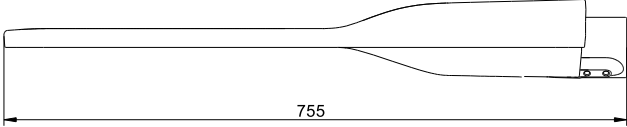

755


$S = 0,037 \text{ m}^2$




355

$S = 0,025 \text{ m}^2$

BGP/BGS204
32/48A, 48/60A

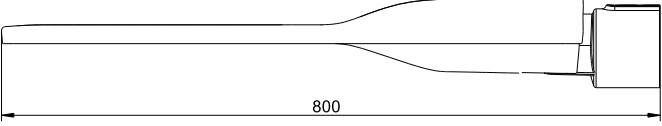


800




355

BGP/BGS204
76A


For version without cable




2

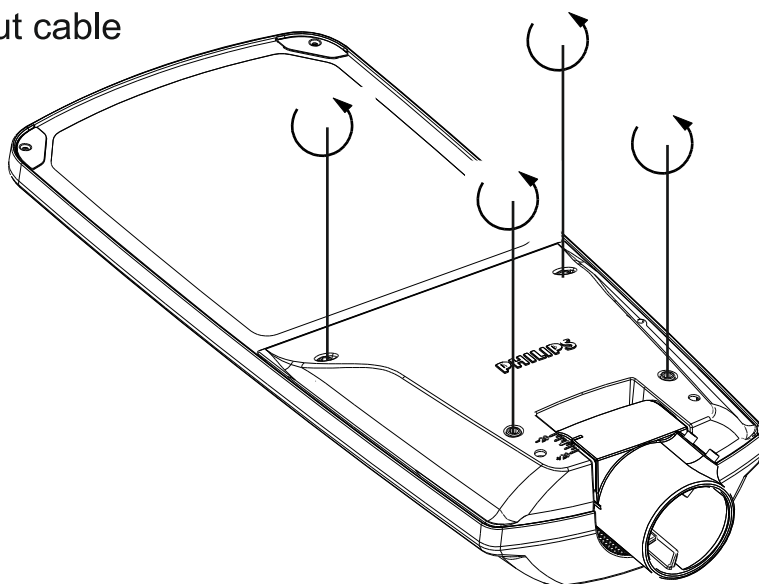




3

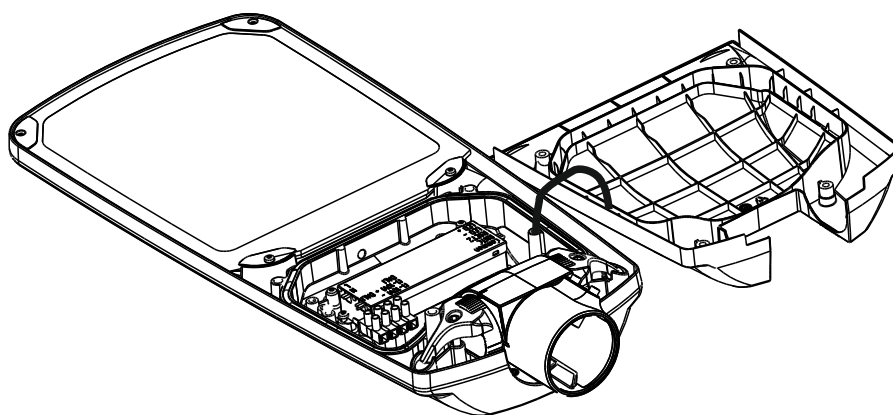


4

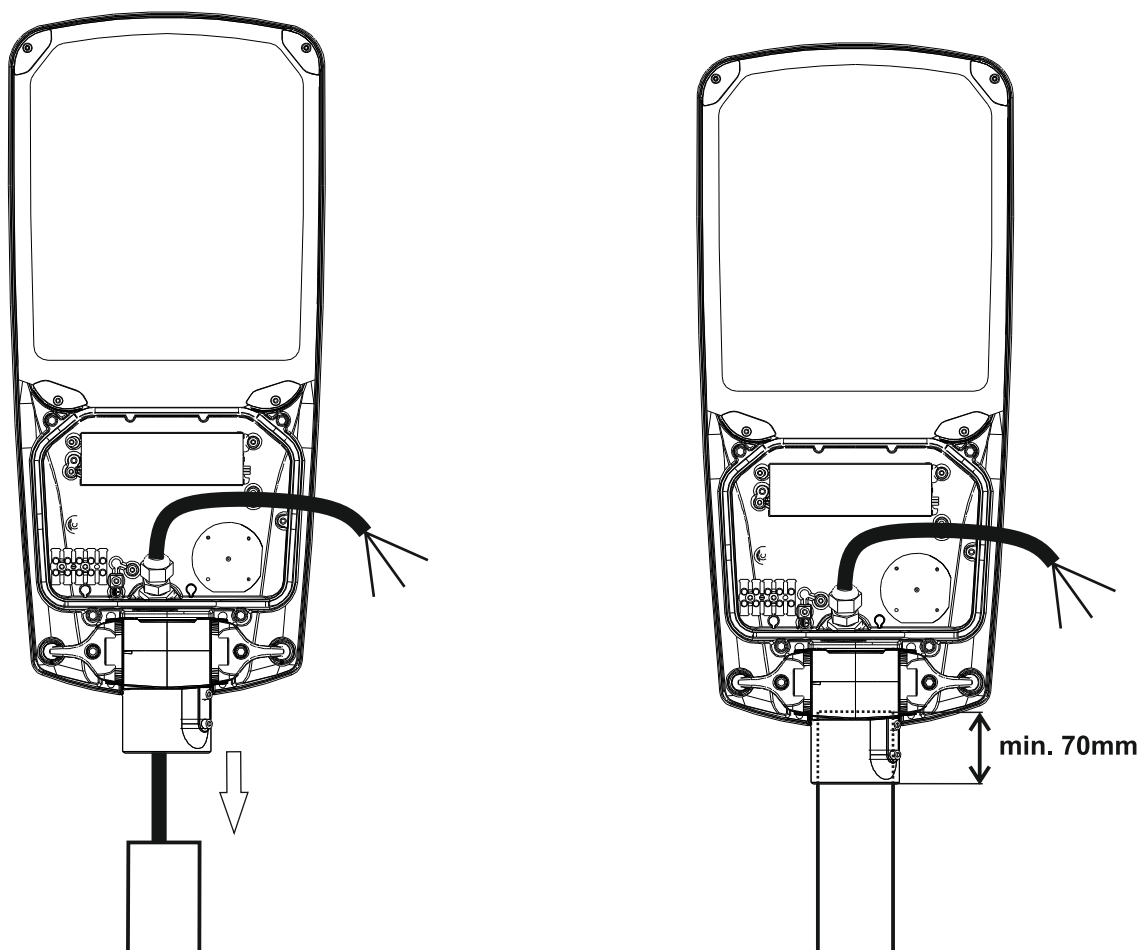

Conductor size 0,5mm² - 2,5mm²

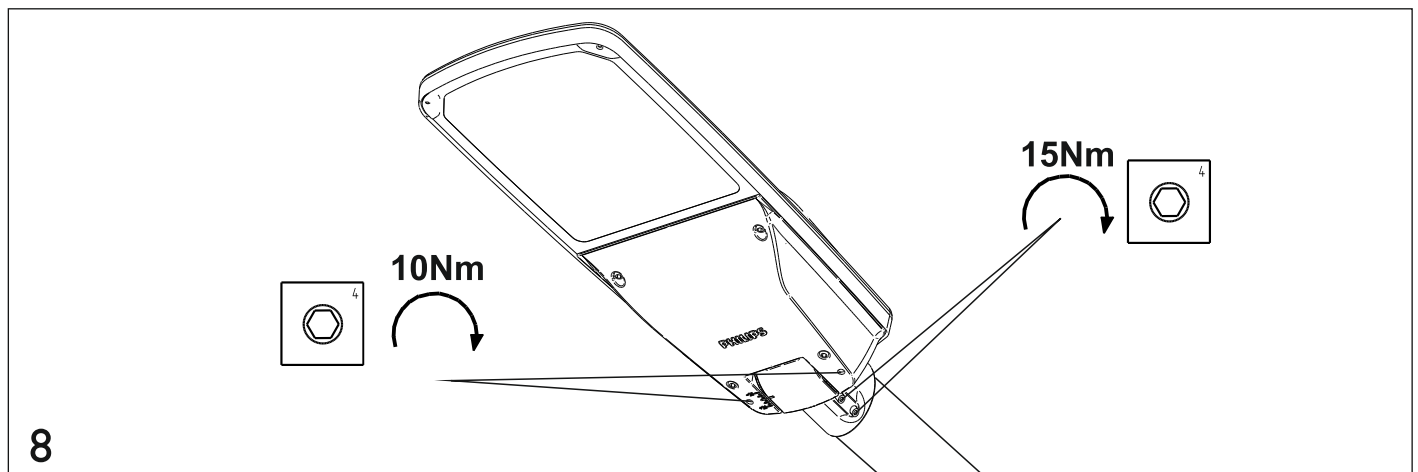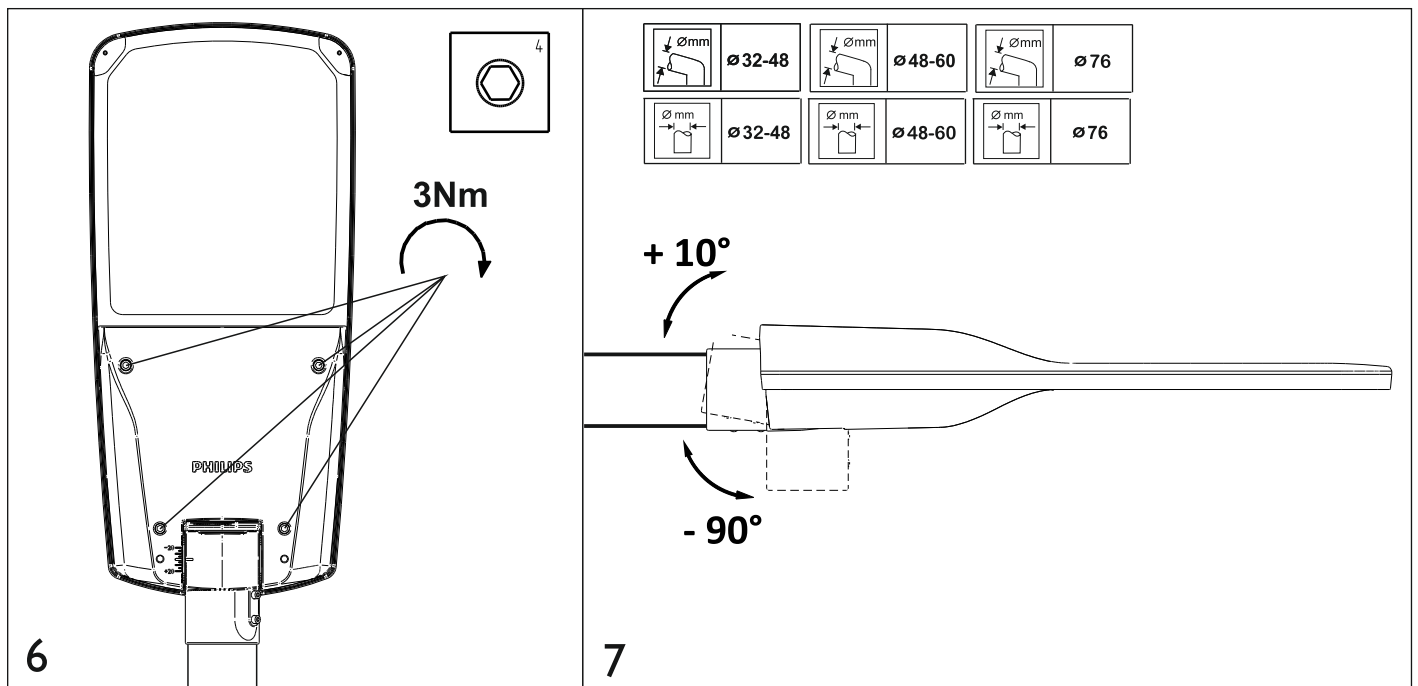
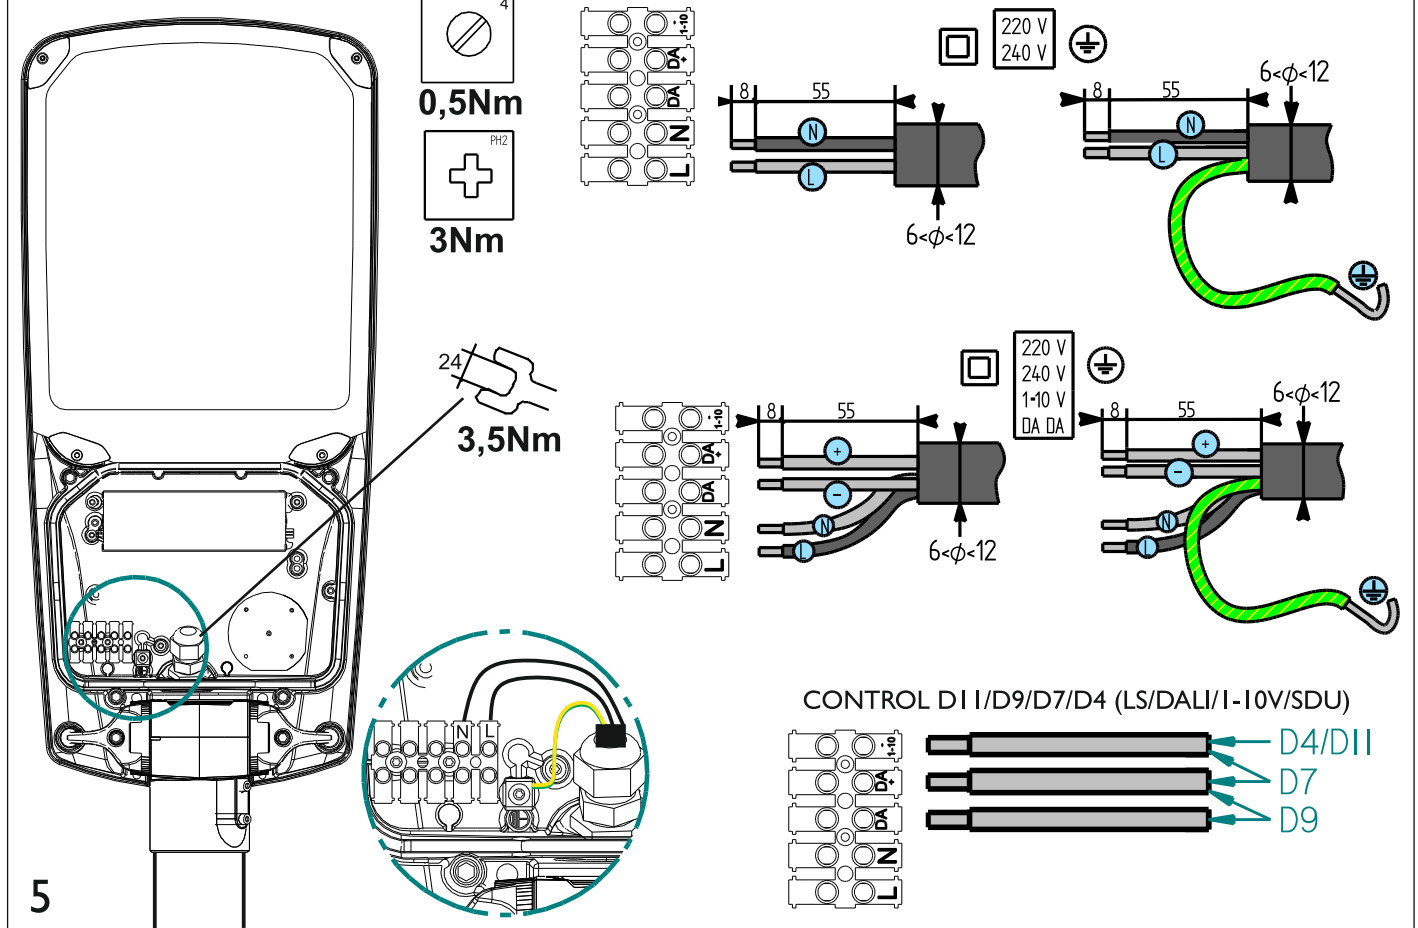


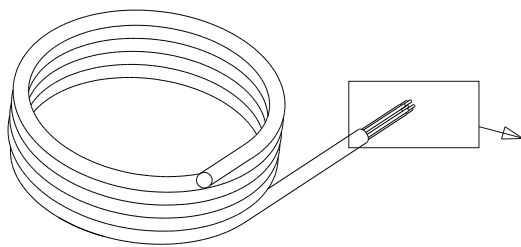

For version with cable


⊕		N blue L yellow-green brown	⊖		N blue L brown
⊕	D7/D9 (DALI / 1-10V)	⊖ grey ⊕ black ⊖ yellow-green ⊖ blue ⊖ brown	⊖	D7/D9 (DALI / 1-10V)	⊖ grey ⊕ black ⊖ blue ⊖ brown
⊕	D4/D11 (SDU/LS)	⊖ black ⊖ yellow-green ⊖ blue ⊖ brown	⊖	D4/D11 (SDU/LS)	⊖ black ⊖ blue ⊖ brown

9

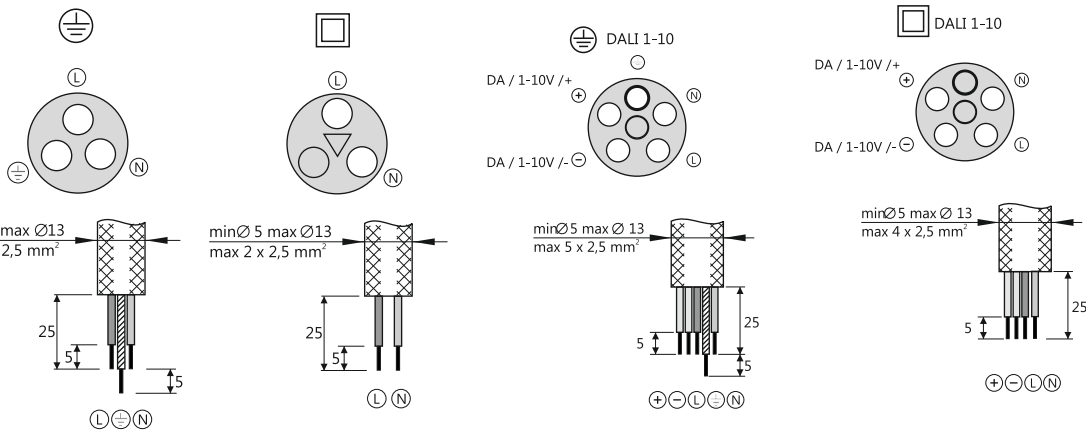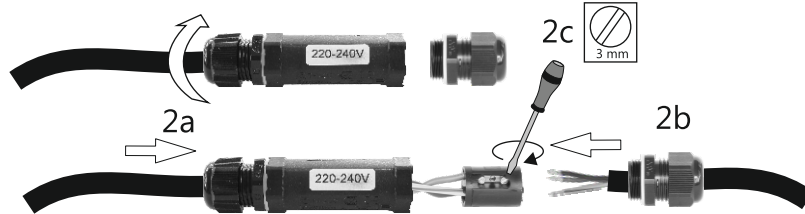


10

...DDFx... - DYNADIMMER

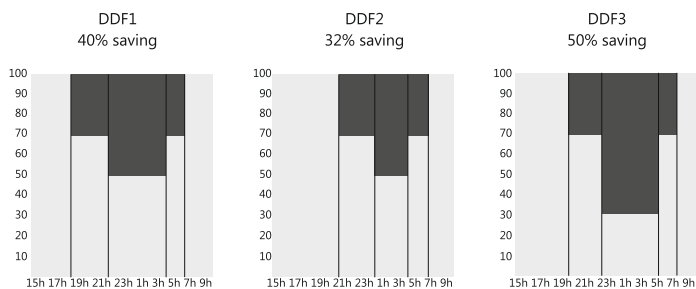


11

...LS-x... - LUMISTEP

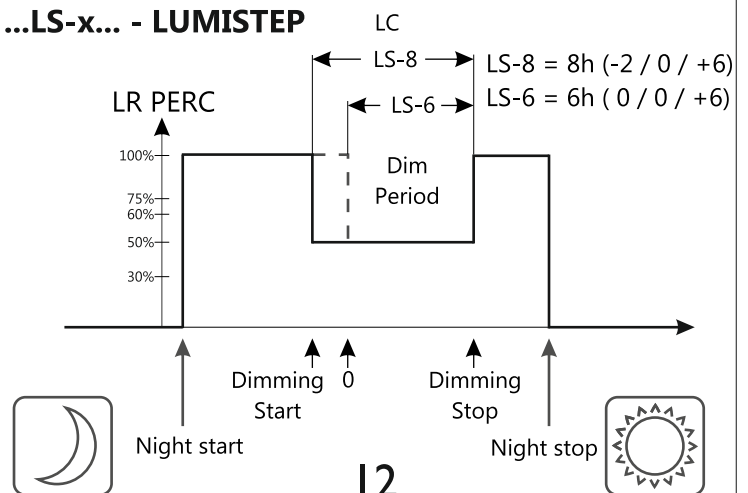

12

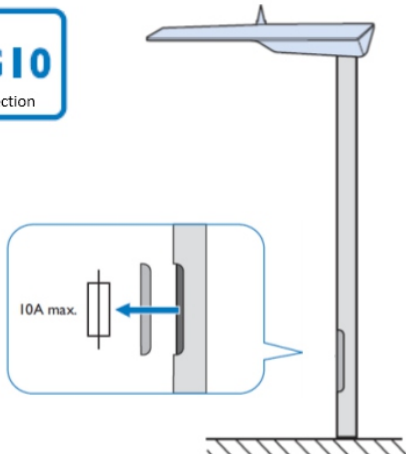

13

