



PHILIPS

CoreLine
Waterproof

WT120C IA1



Please refer to InterAct commissioning guide to enable wireless InterAct Ready functionality

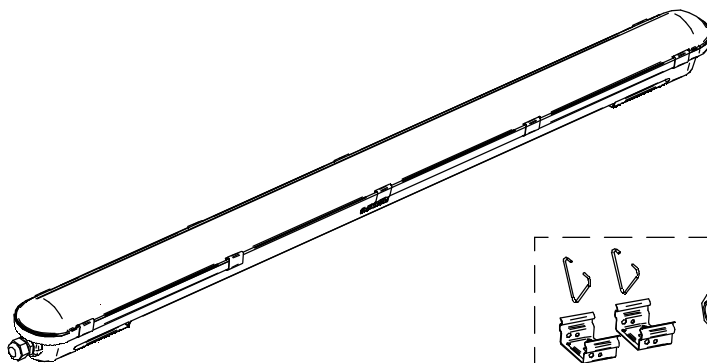

220 V
240 V

50 Hz
60 Hz



Max.
35 °C
Min.
-20 °C



LIFETIME
50k HRS




IP65


IK08




GLOW
WIRE
850 °C











	System Power(W)		System light output (Lm)	Color temperature (K)
WT120C LED40S/840 IA1 L1200	36,5	1,53	4100	4000
WT120C LED60S/840 IA1 L1500	49,5	1,82	6000	4000

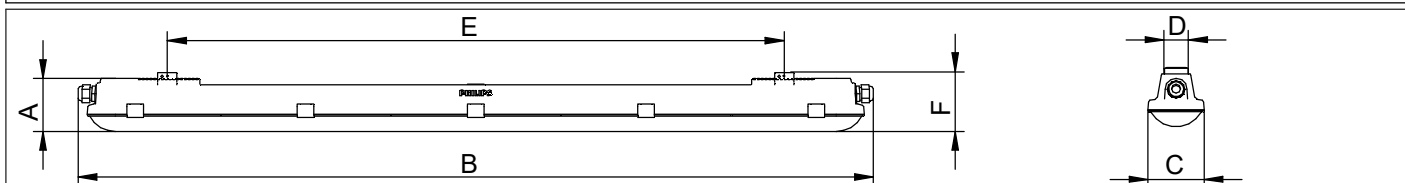

Type	Dimension (mm)						Nr. of clips
	A	B	C	D	E	F	
WT120C LED40S L1200	82	1250	87	38	960	96	10
WT120C LED60S L1500		1530			1213		12


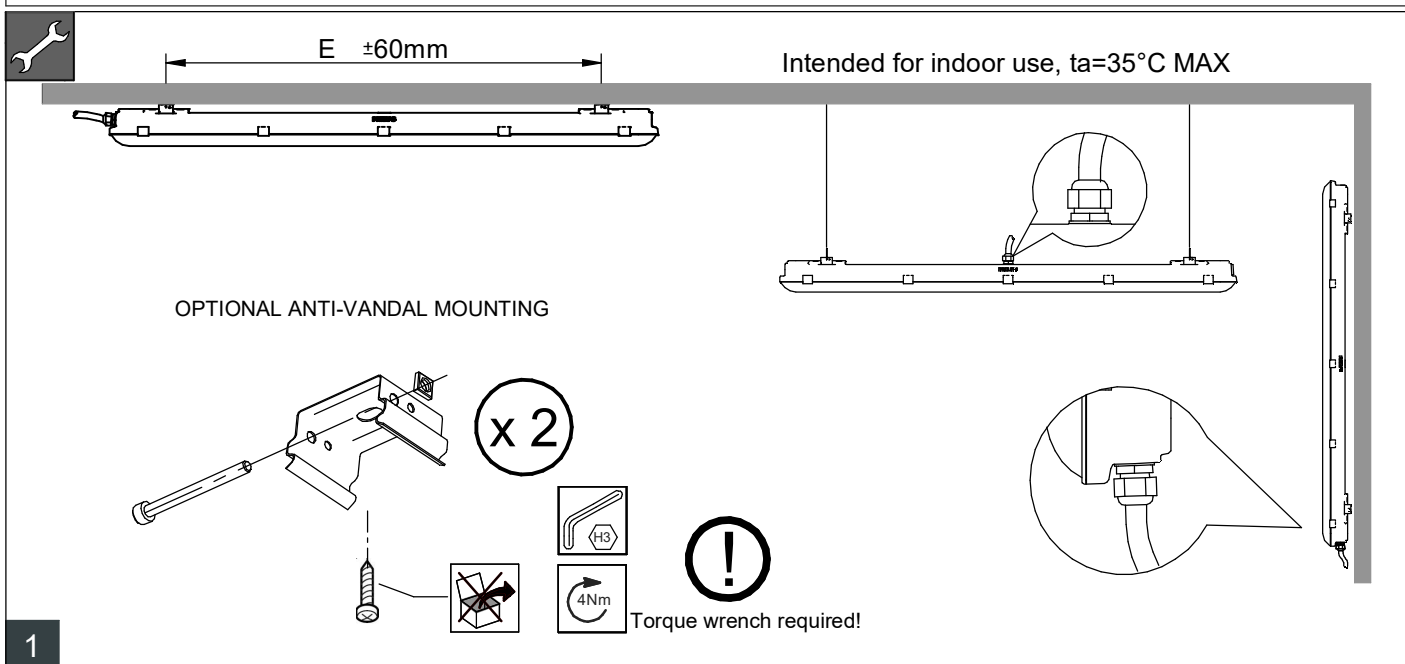


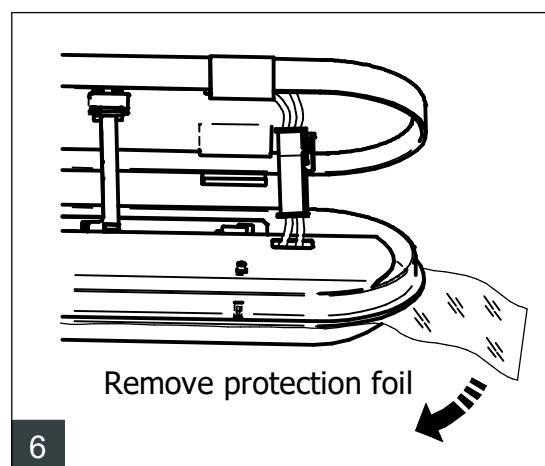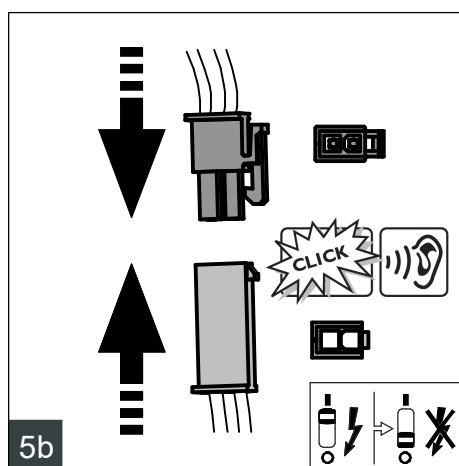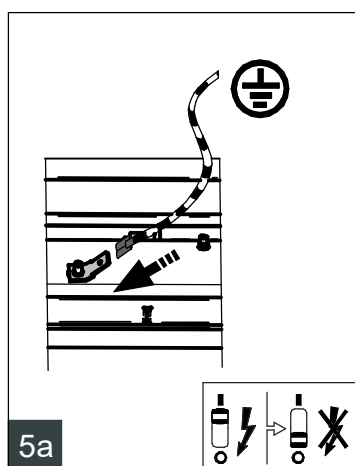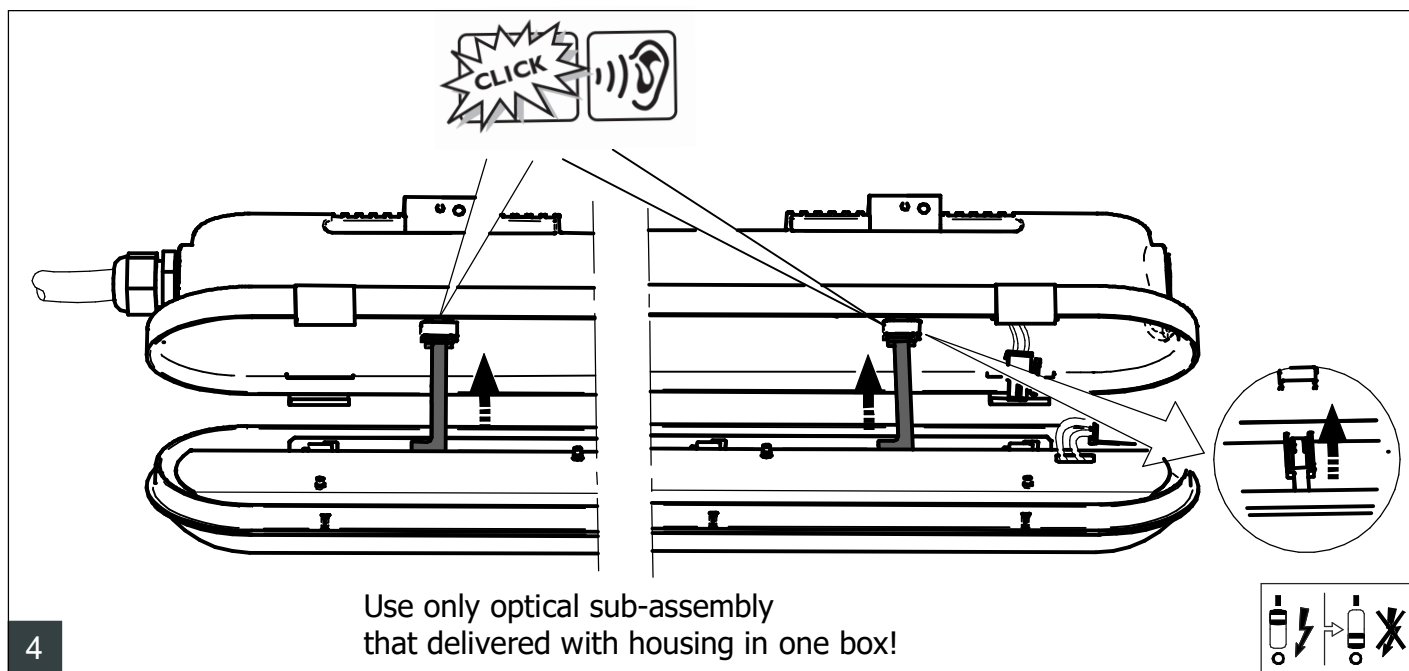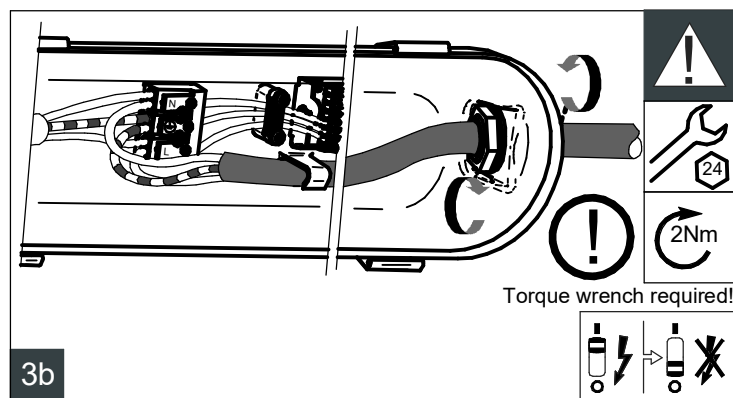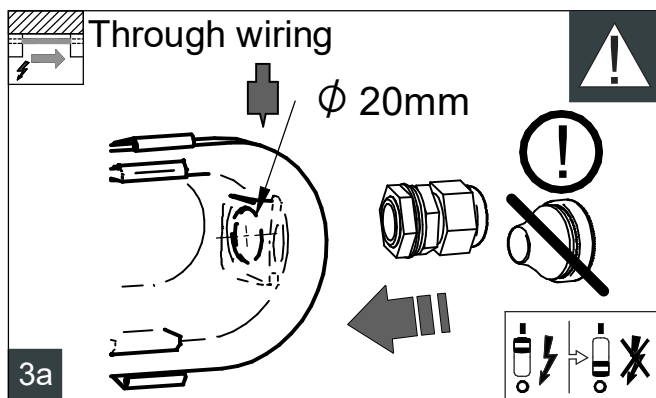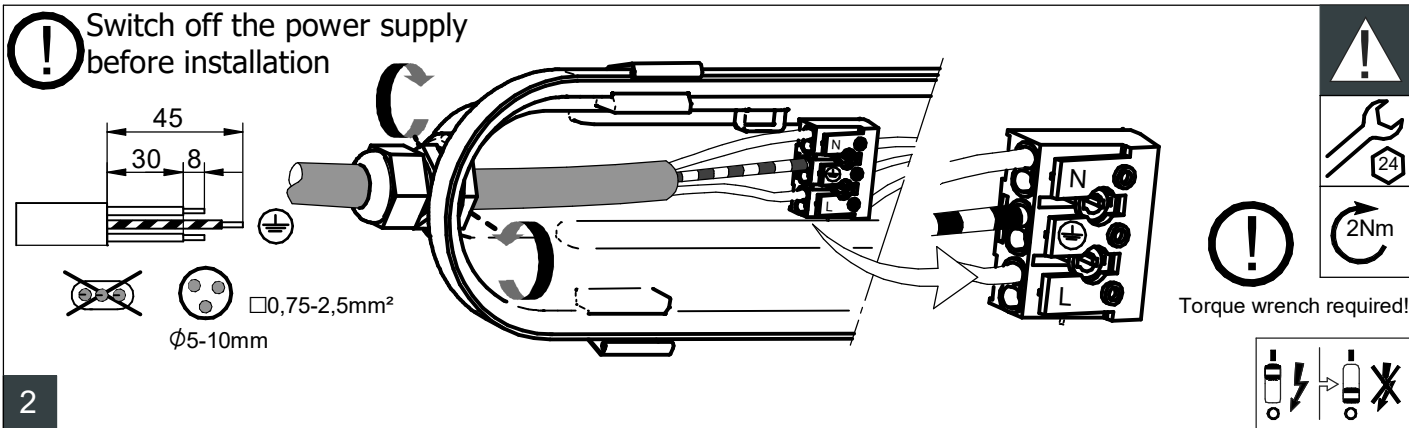

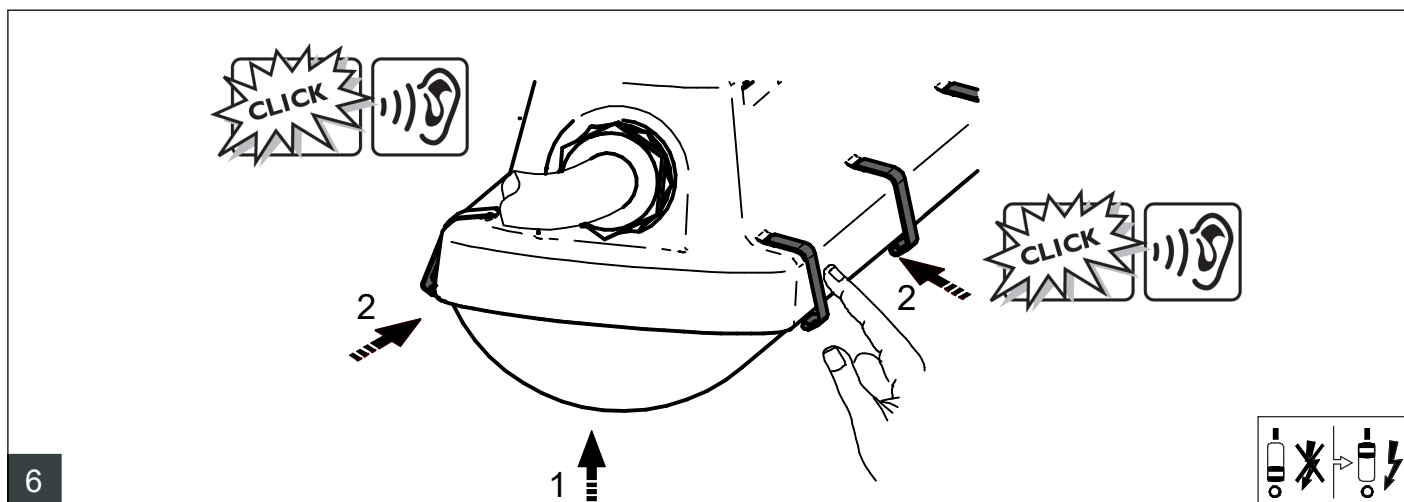

SERVICE (DRIVER REPLACEMENT)

Light source (LED) is non-user replaceable.

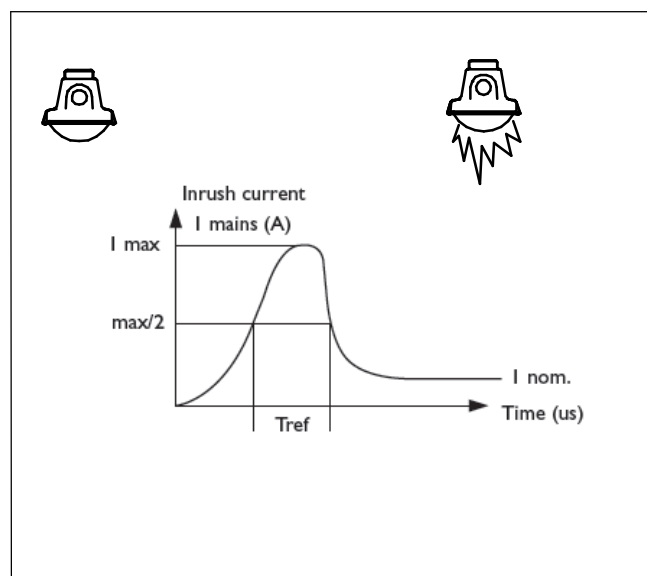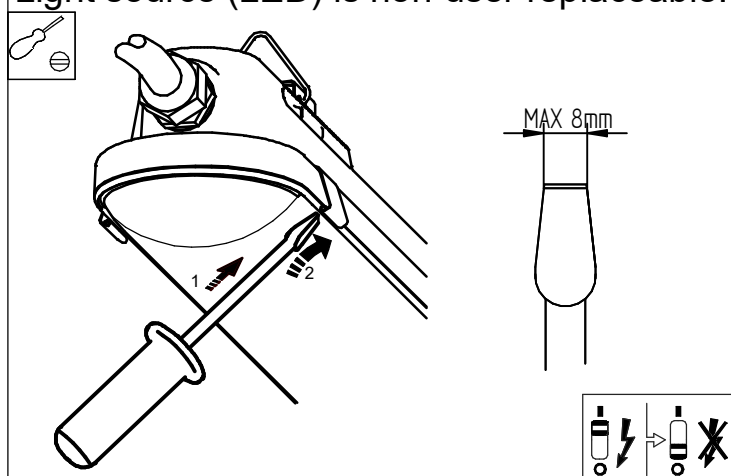


	LED40S	LED60S
I_{peak} [A]	22	22
Twidth [μs]	270	270
Max. Nr of products		
Drivers / MCB 16A type B [max.]	22	22
Drivers / MCB 10A type B [max.]	13	13
Drivers / MCB 16A type C [max.]	37	37

Maintenance instructions

To assure the lighting quality of this unique LED lighting concept there are only a few instructions regarding the maintenance of this LED luminaire:

- * Do not touch electronic components!
Electronic components maybe under high voltage.
Caution, risk of electric shock

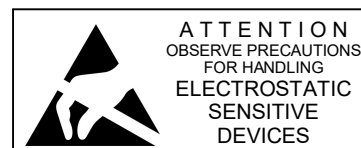

- * Do not stare into LED light beam.
- * The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.
- * Above average concentration of sulfur effects the useful lifetime of the product.
E.g: Light color changes from white to blue. Typically in chicken & pig farms.

