



## SVR16 Series

5.5W-12W

Remote Lamp Head  
Damp/Wet Location



## INSTALLATION AND OPERATING INSTRUCTIONS

### IMPORTANT SAFEGUARDS

When using electrical equipment, basic safety precautions should always be followed, including the following:

### READ AND FOLLOW ALL SAFETY INSTRUCTIONS

All servicing should be performed by qualified personnel only.

Equipment should be mounted in locations and at heights where it will not be readily subjected to tampering by unauthorized personnel.

The use of accessory equipment not recommended by the manufacturer may cause an unsafe condition.

Do not use this equipment for other than intended use.

Do not let power supply cords touch hot surfaces.

Do not mount near gas or electric heaters.

**CAUTION:** Halogen cycle lamp(s) are used in this equipment. To avoid shattering: Do not operate lamp in excess of rated voltage, protect lamp against abrasion and scratches and against liquids when lamp is operating, dispose of lamp with care.

Halogen cycle lamps operate at high temperatures. Do not store or place flammable materials near lamp.

### SAVE THESE INSTRUCTIONS

**WARNING** – Shut off AC power to branch circuits to which units will be connected. All wiring should be per National Electrical Code and local regulations.




Philips Lighting North America Corporation  
200 Franklin Square Drive  
Somerset, NJ 08873, USA  
Phone: 855-486-2216  
[www.philips.com/luminaires](http://www.philips.com/luminaires)

Philips Lighting Canada Ltd.  
281 Hillmount Road,  
Markham, ON, Canada L6C 2S3  
Phone: 800-668-9008  
[www.philips.com/luminaires](http://www.philips.com/luminaires)


9140053017 February 2016

# INSTALLATION

(1): For junction box mounting (wet or damp location units) – Remove large center knockout for wiring access and remove necessary mounting knockouts. Fasten backplate to junction box. Ensure that gasket is evenly compressed around perimeter.

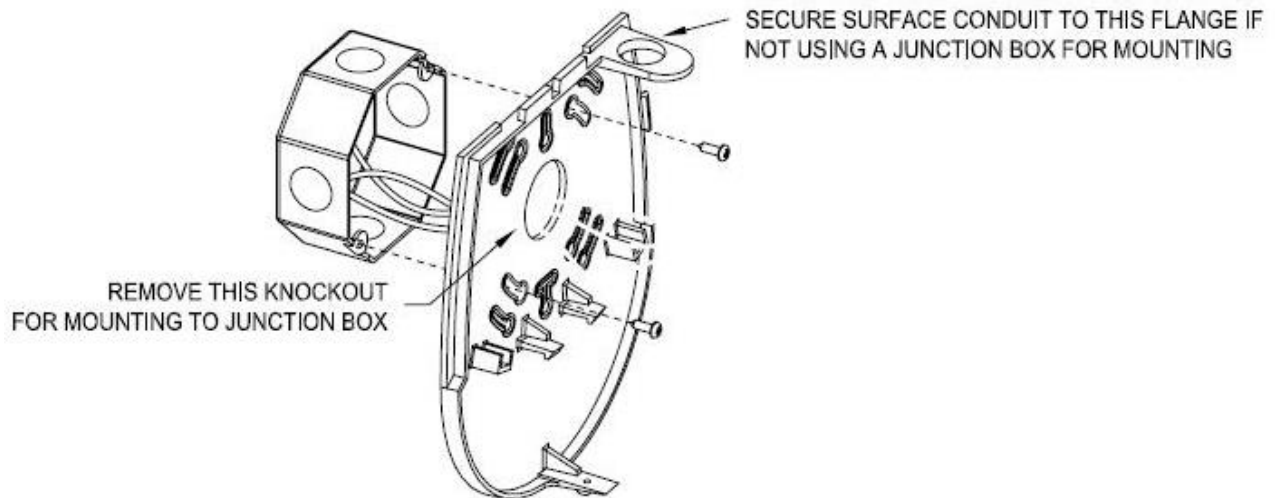

(2): Install electronics module to backplate by hinging together at top and snapping together at bottom. Screws are provided for further securing electronics module to backplate if so desired. Install lamps provided by snapping into ceramic lamp holders on lamp head. Attach cover by snapping over electronics module. Cover will latch onto edge of backplate in three locations. Tamperproofing screws may be driven into unit to secure installation against vandalism.

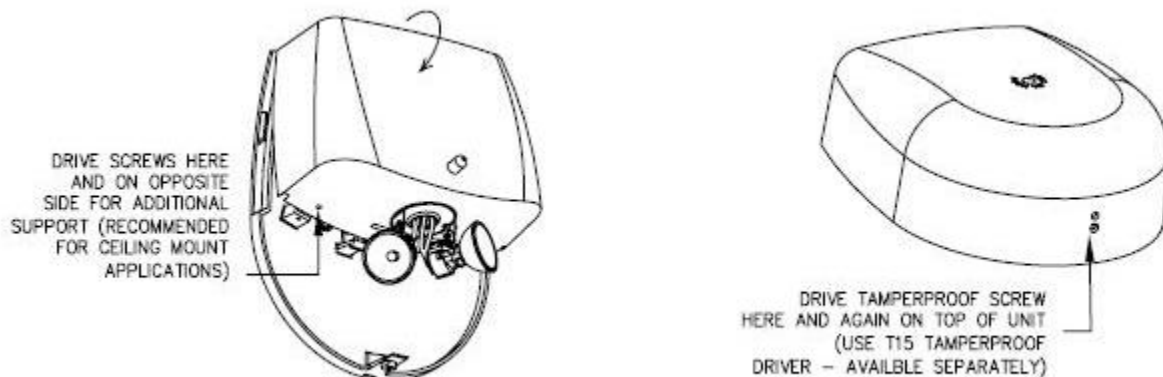


Philips Lighting North America Corporation  
200 Franklin Square Drive  
Somerset, NJ 08873, USA  
Phone: 855-486-2216  
[www.philips.com/luminaires](http://www.philips.com/luminaires)

Philips Lighting Canada Ltd.  
281 Hillmount Road,  
Markham, ON, Canada L6C 2S3  
Phone: 800-668-9008  
[www.philips.com/luminaires](http://www.philips.com/luminaires)

9140053017 February 2016

# SERVICING

(1): For servicing, remove cover by inserting a small screwdriver or similar tool into hole in bottom of cover and pressing upward to release locking tab. Pull cover up and off unit.

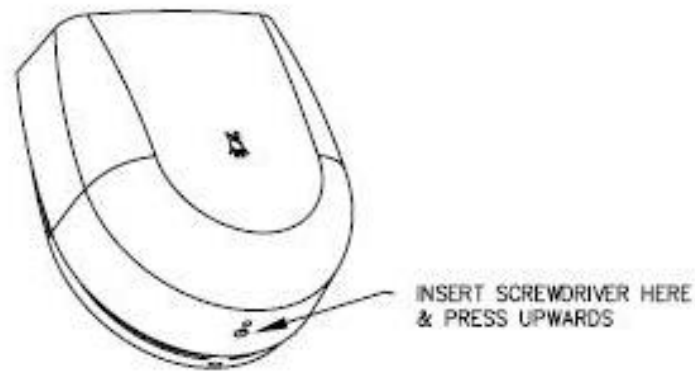

(2): Remove electronics module from backplate by inserting a flat bladed screwdriver between backplate and module and prying module away from backplate.

