




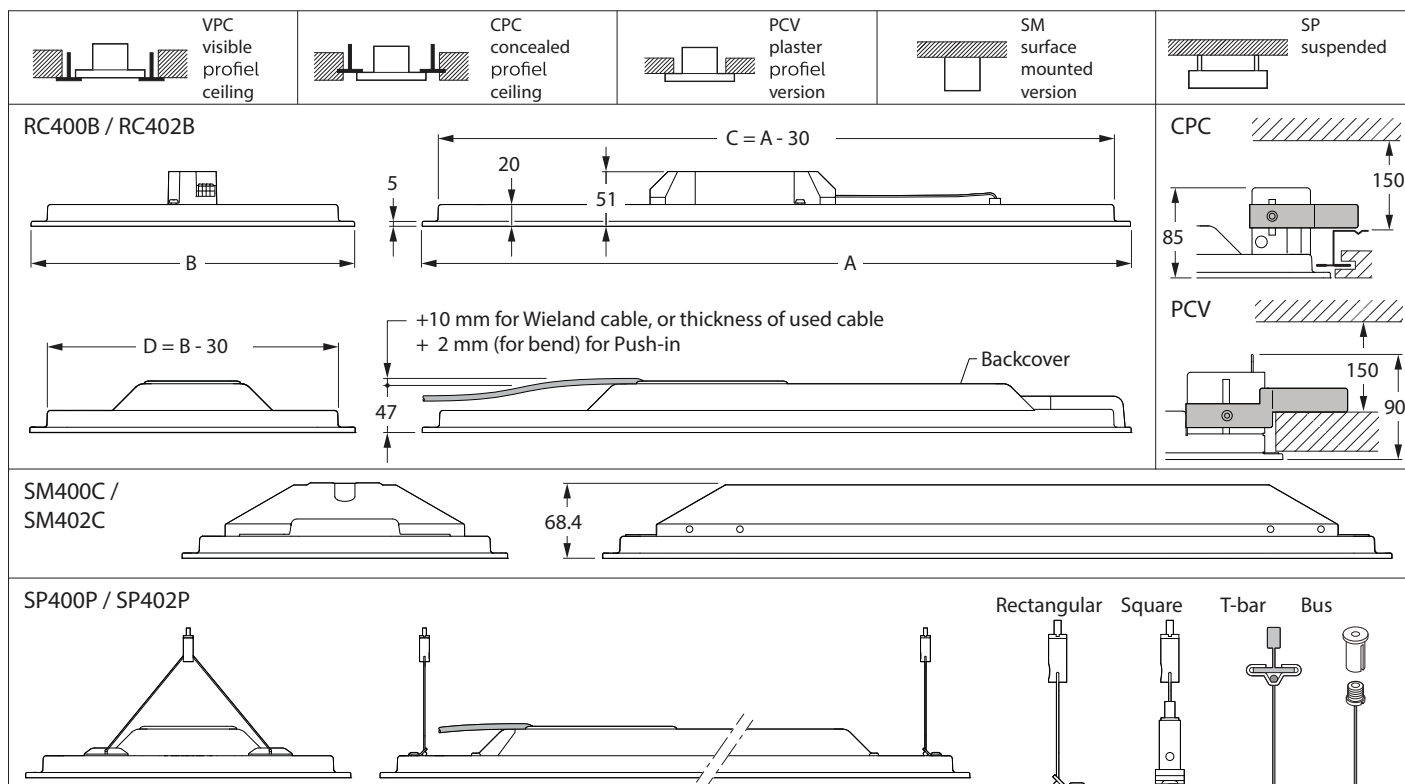
# PHILIPS








## SlimBlend

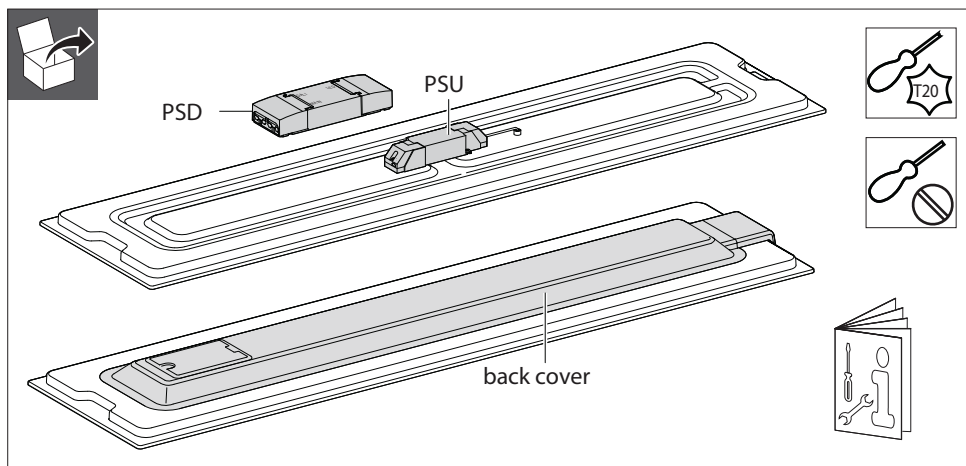

RC400B, RC402B, SM400C  
SM402C, SP400P, SP402P



		Dimensions in mm					
Module			A	B			
RC400B	600	VPC CPC PCV	W60L60	597	597	IP40	5,6
			W30L120	1197	297	IP40	5,7
RC402B	625		W62L62	622	622	IP40	6
			W31L125	1247	312	IP40	6,1
SM400C	600	SM	W60L60	597	597	IP20	6,6
			W30L120	1197	297	IP20	6,7
SM402C	625		W62L62	622	622	IP20	7
			W31L125	1247	312.5	IP20	7,1
SP400P	600	SP	W60L60	597	597	IP20	7,3
			W30L120	1197	297	IP20	7,4
SP402P	625		W62L62	622	622	IP20	7,7
			W31L125	1247	312.5	IP20	7,8




	All versions with PSU/PSD drivers under back cover		Instructions for SpaceWise versions 
	All versions with PSU/PSD drivers standalone		
	All versions with POE drivers		





ATTENTION  
OBSERVE PRECAUTIONS  
FOR HANDLING  
ELECTROSTATIC  
SENSITIVE  
DEVICES


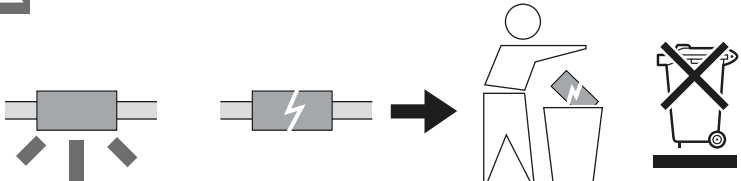
ACL  
versions only

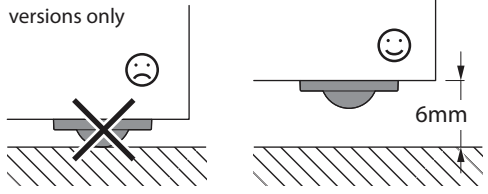

Inrush current




	LED28S/ 36S/42S	LED50S
Electrical characteristics		
I <sub>max</sub> (A)	26	49
T <sub>ref</sub> (μs)	750	154
EL I max.	0.7	0.7
MCB Luminaire max.		
B-16 A	24	17
C-16 A	40	26
EL CB 30mA	30	30






The light source of this luminaire is not replaceable;  
when the light source reaches its end of life the  
whole luminaire shall be replaced.

Option: Safety cable (SC)

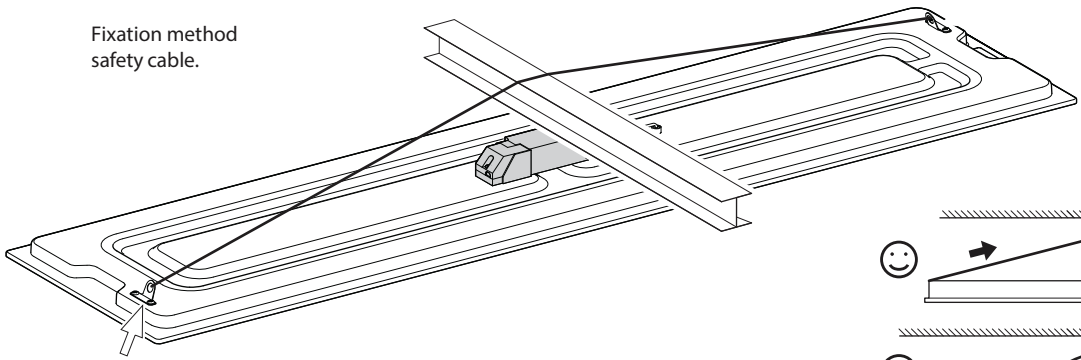
Fixation method  
safety cable.

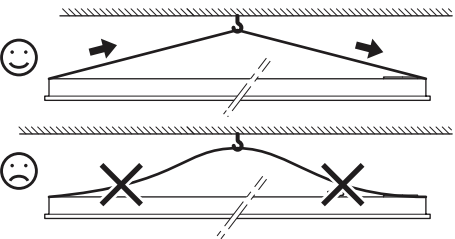






VPC (lay-in)

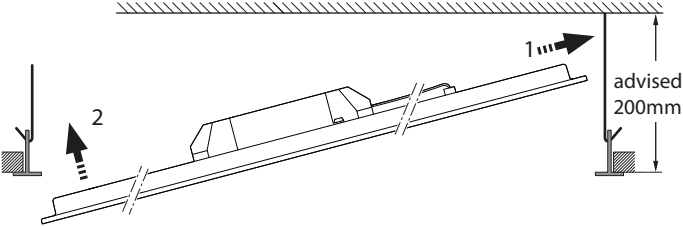

1

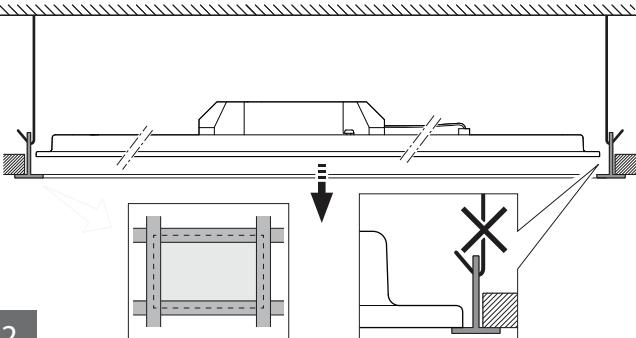

2



© 2018 Signify Holding



All rights reserved. This document contains information relating to the product portfolio of Signify which information may be subject to change. No representation or warranty as to the accuracy or completeness of the information included herein is given and any liability for any action in reliance thereon is disclaimed. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.. All other trademarks are owned by Signify Holding or their respective owners.

Signify Holding.  
The Netherlands




## CPC (Concealed profile ceiling)

Brackets are pre-mounted when ordered with luminaire

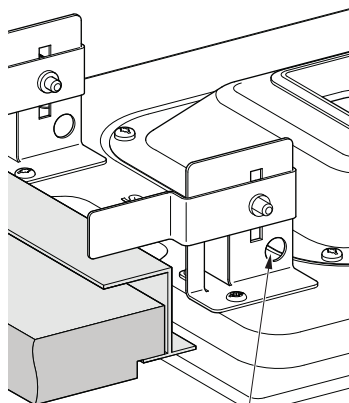


1


Option:  
Safety cable

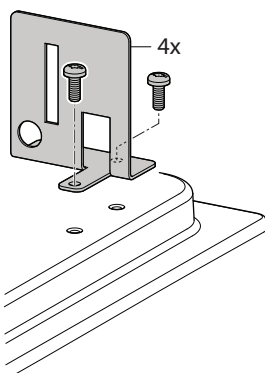


2

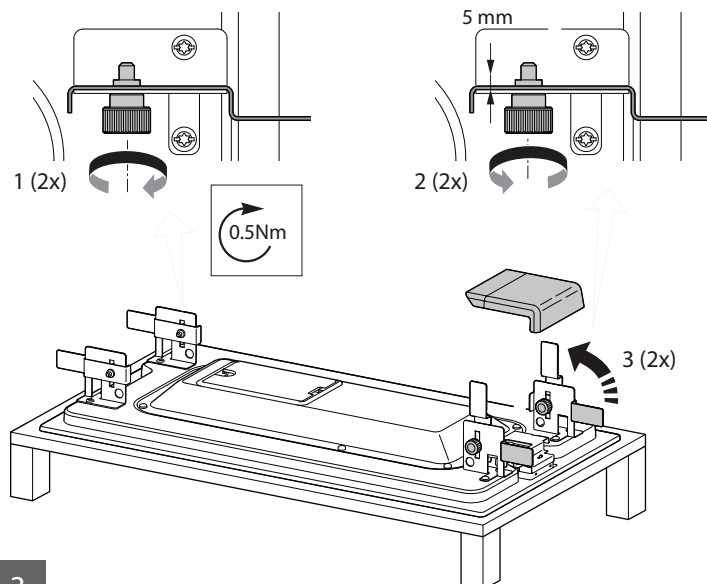

3

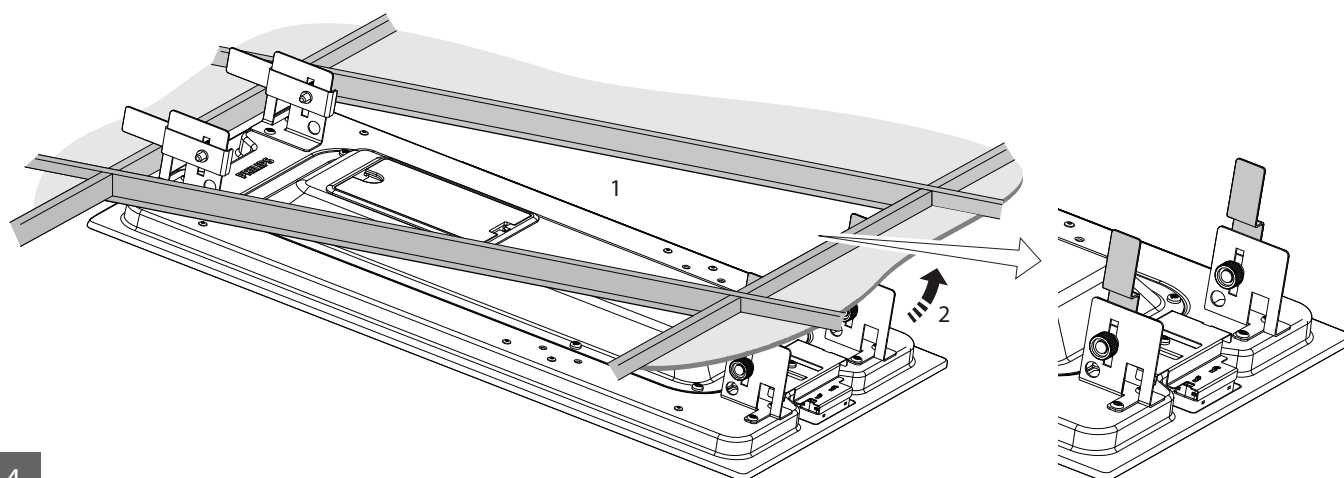


4

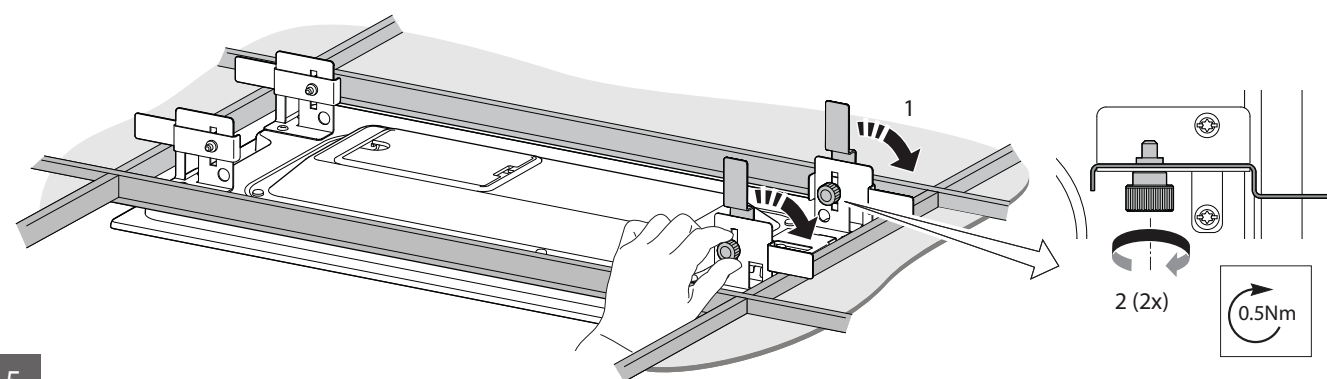

5


### sym-concealed

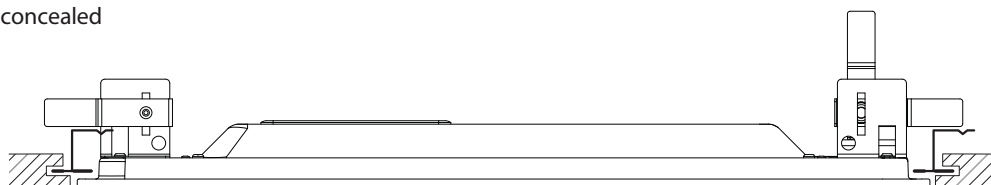

Rect. ✓ ☺

Square ✓ ☺

### A-sym-concealed

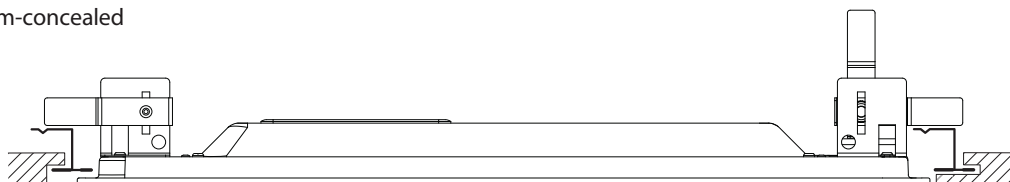


Rect. ✗ ☹

Square ✗ ☹




## PCV (Plaster ceiling version)


Min. 30  
Max. 60

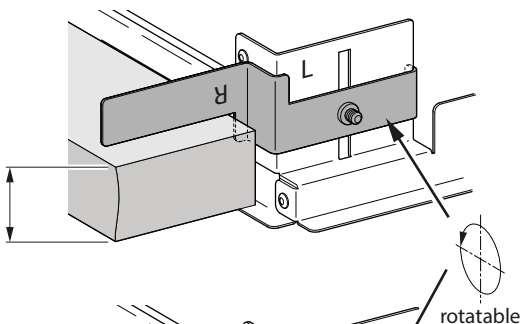


Min. 3.5  
Max. 34

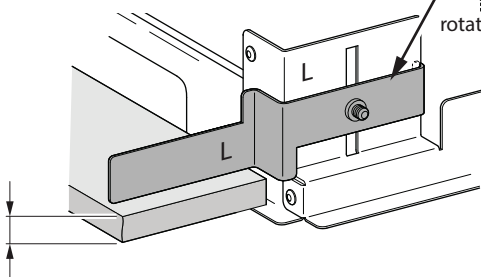

1

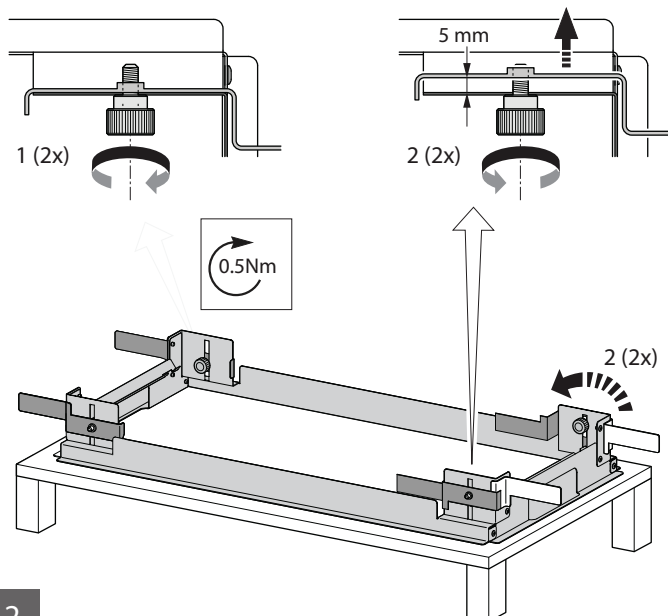


2

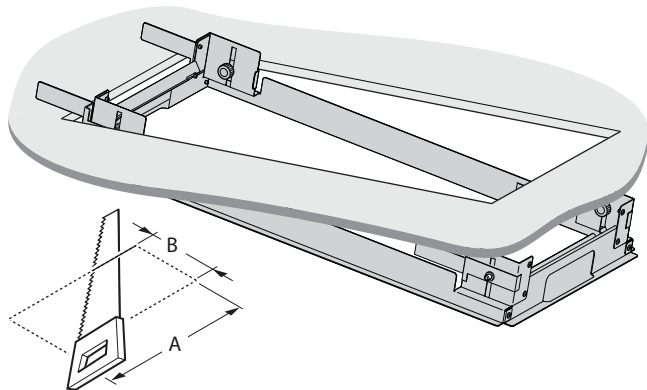


Module		A(mm)	B(mm)
RC400B 600	W60L60	578	578
	W30L120	1178	278
RC402B 625	W62L62	603	603
	W31L125	1228	291

3

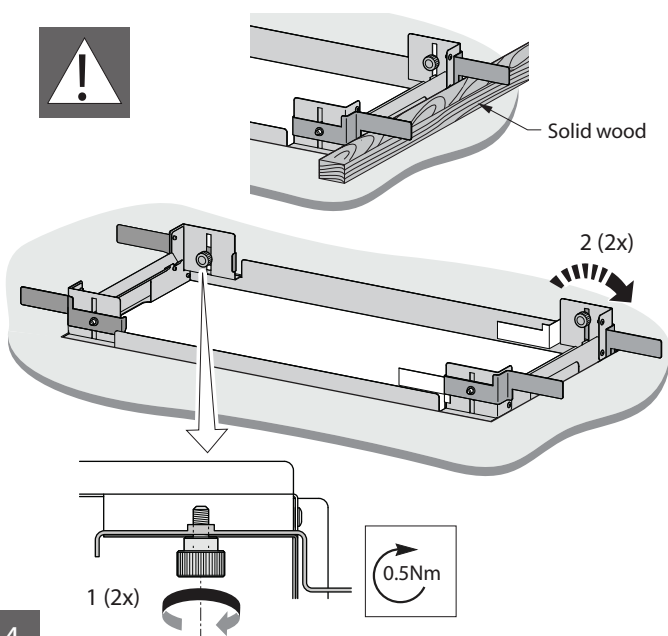


4





V-clips are pre-mounted  
when ordered with luminaire.

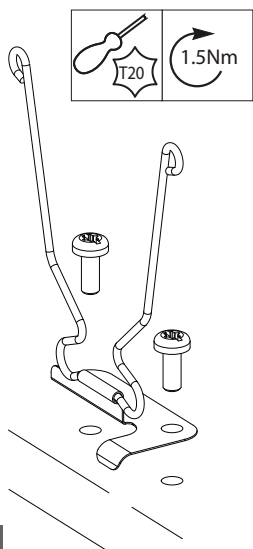

5

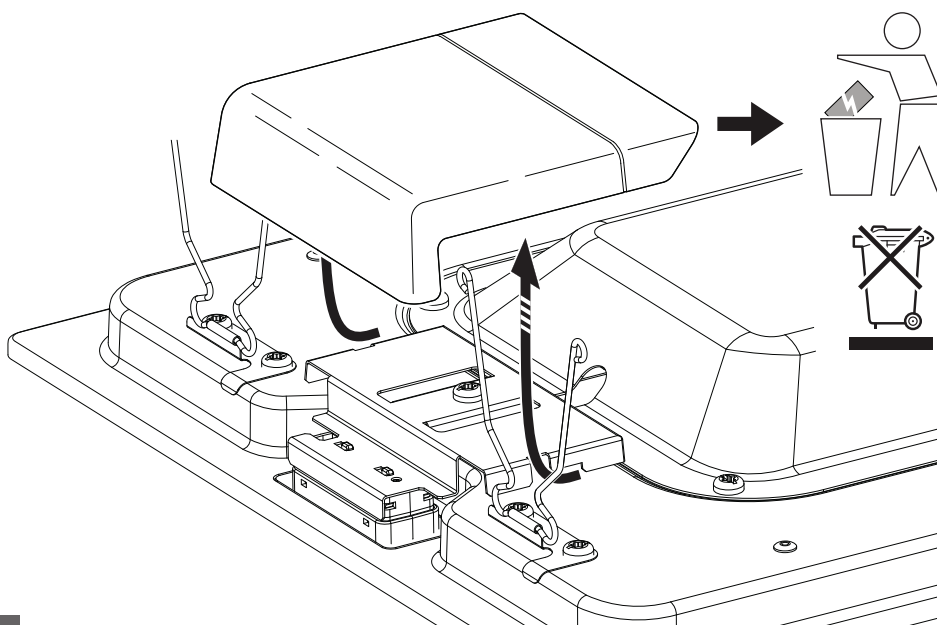


6

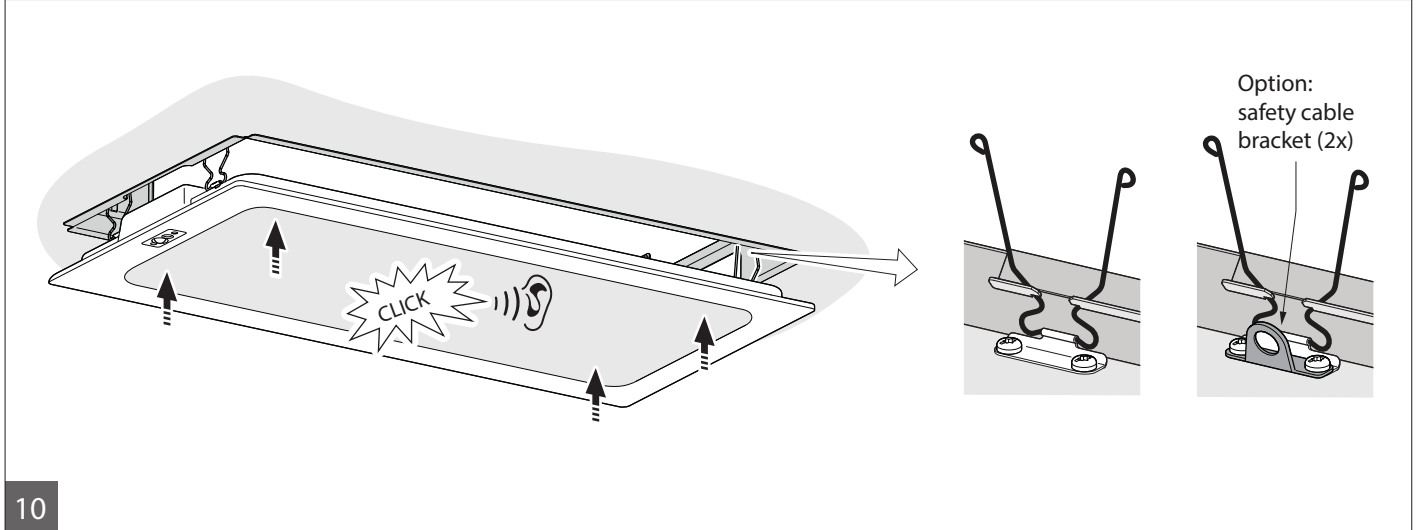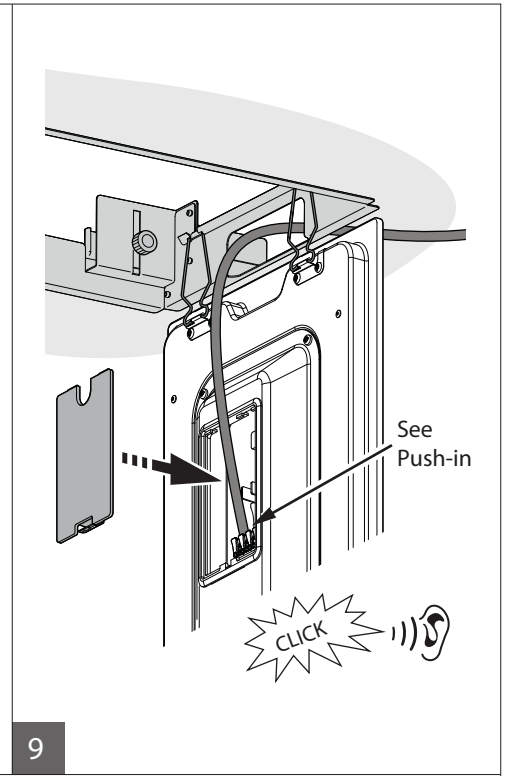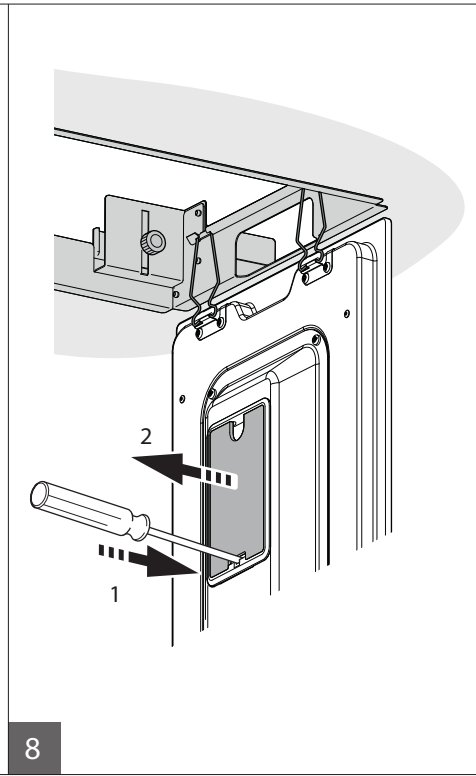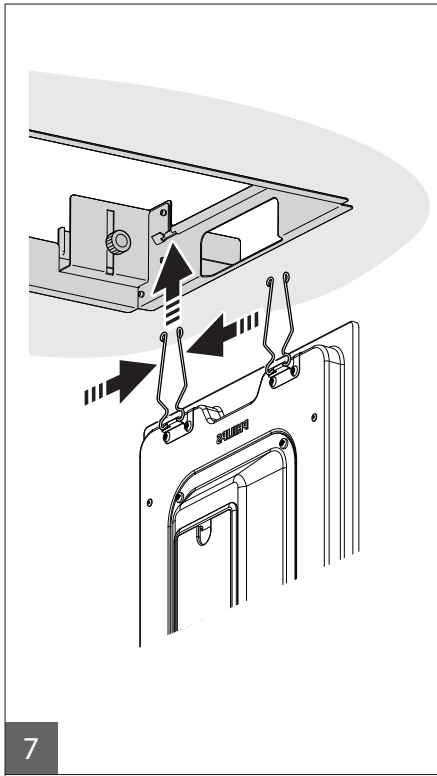




SM (Surface mounted)


Brackets are pre-mounted when ordered with luminaire.

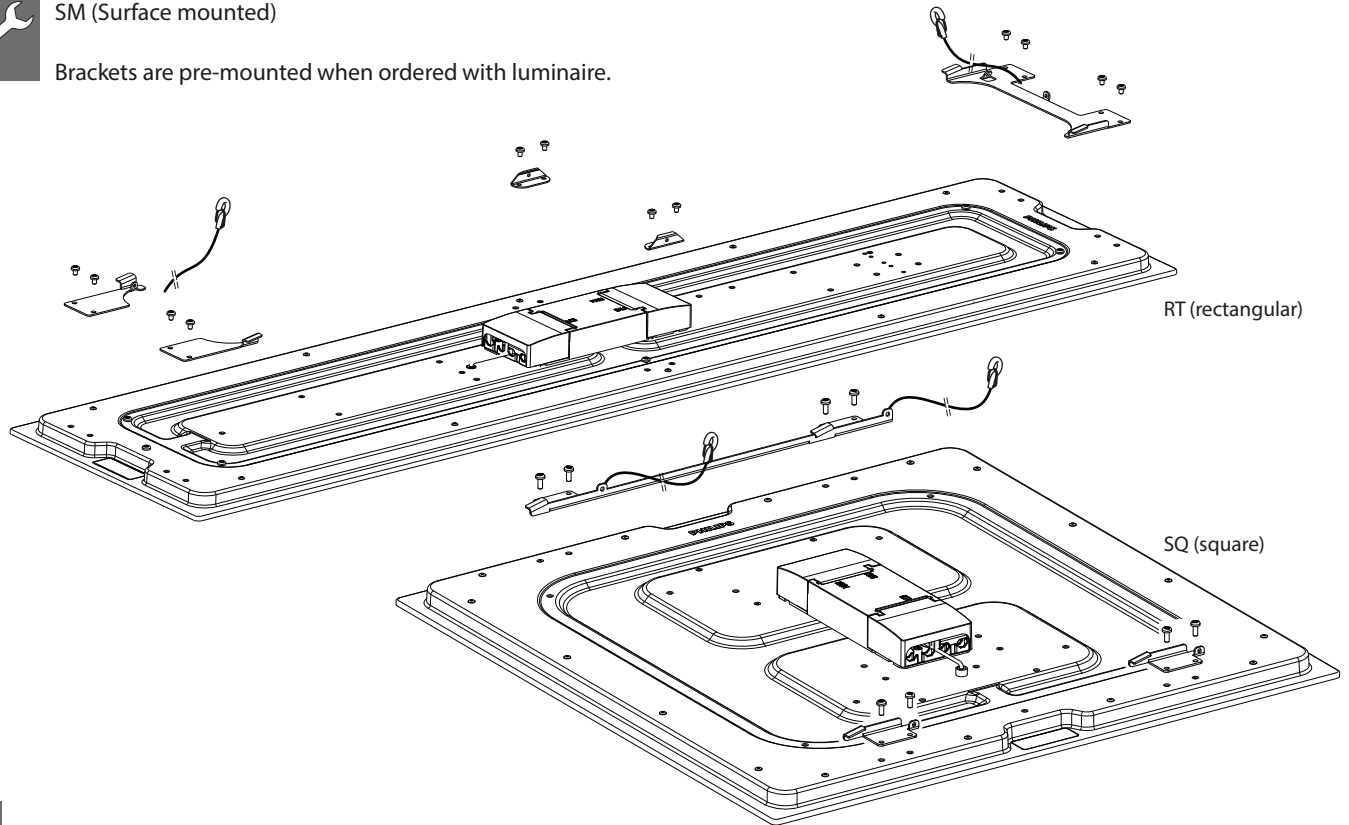

1




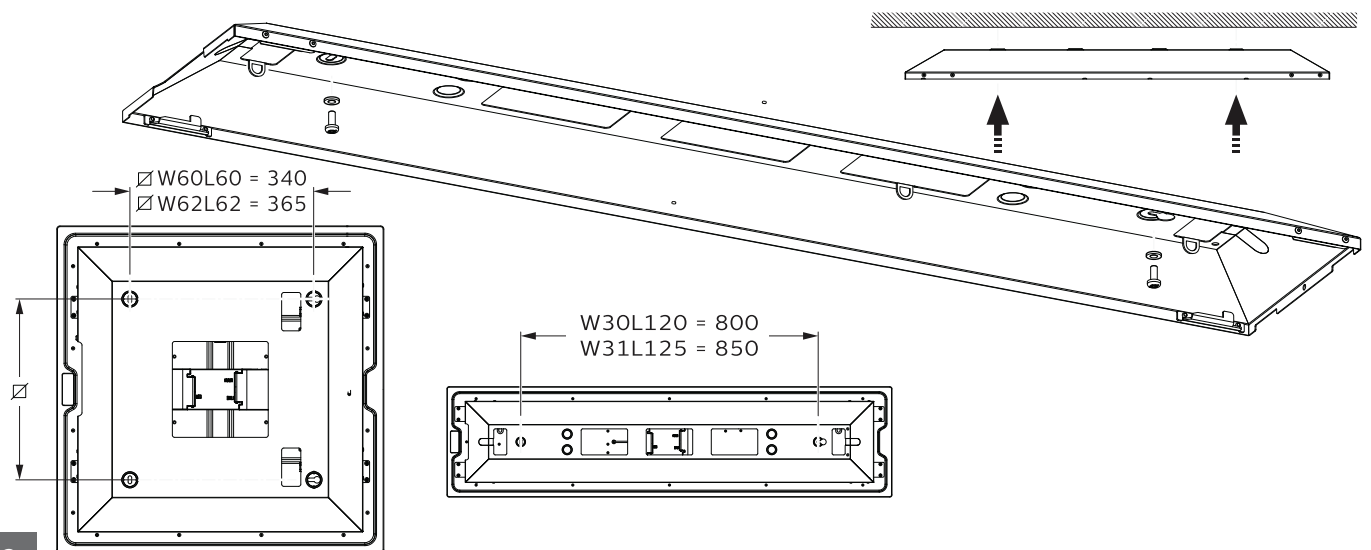


2

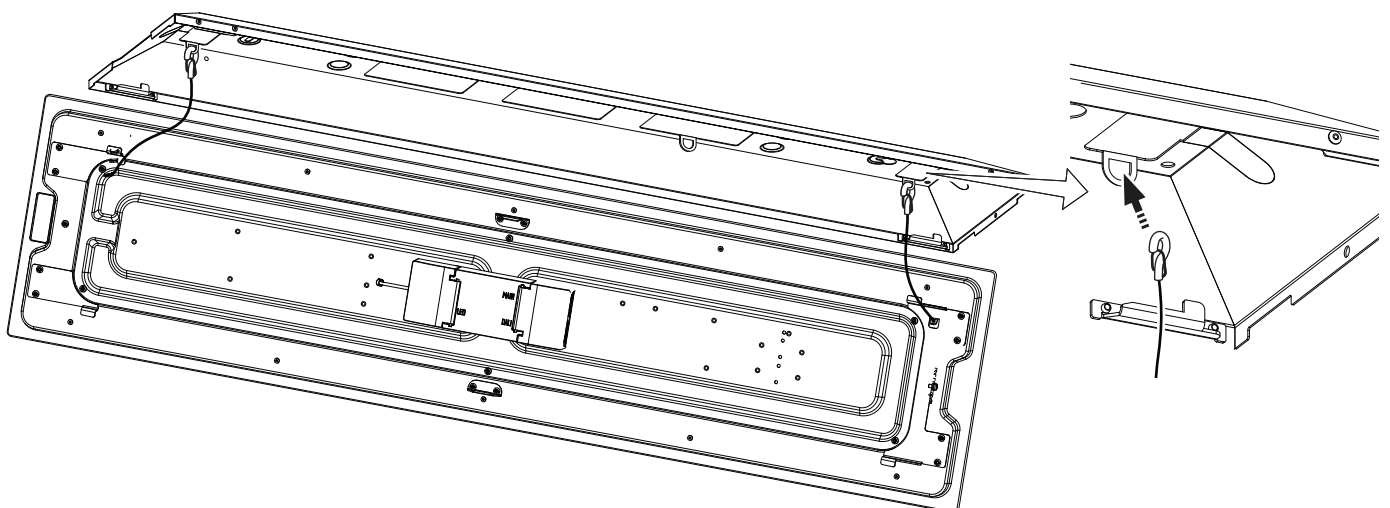

3











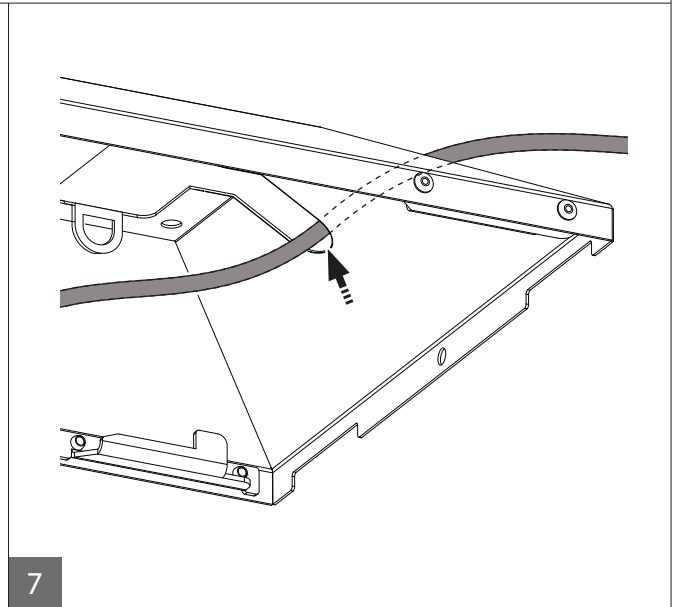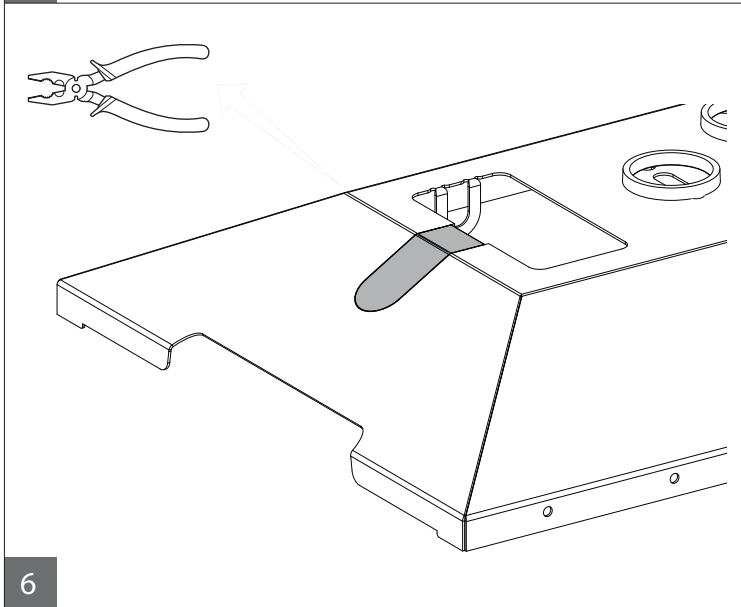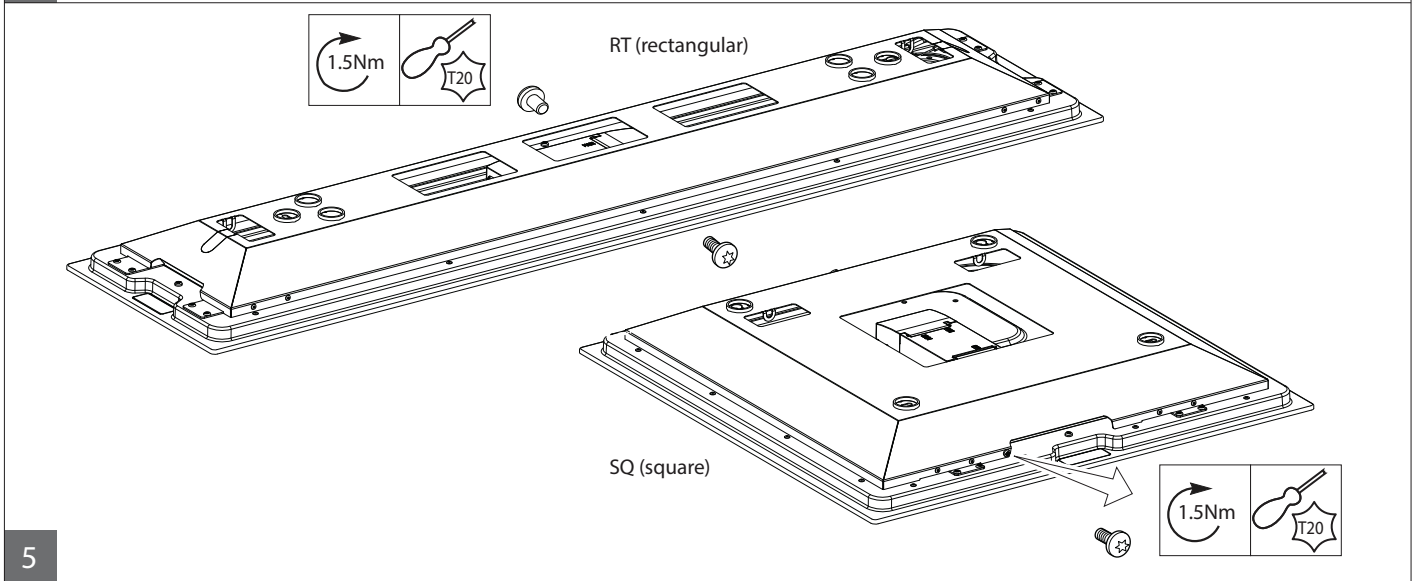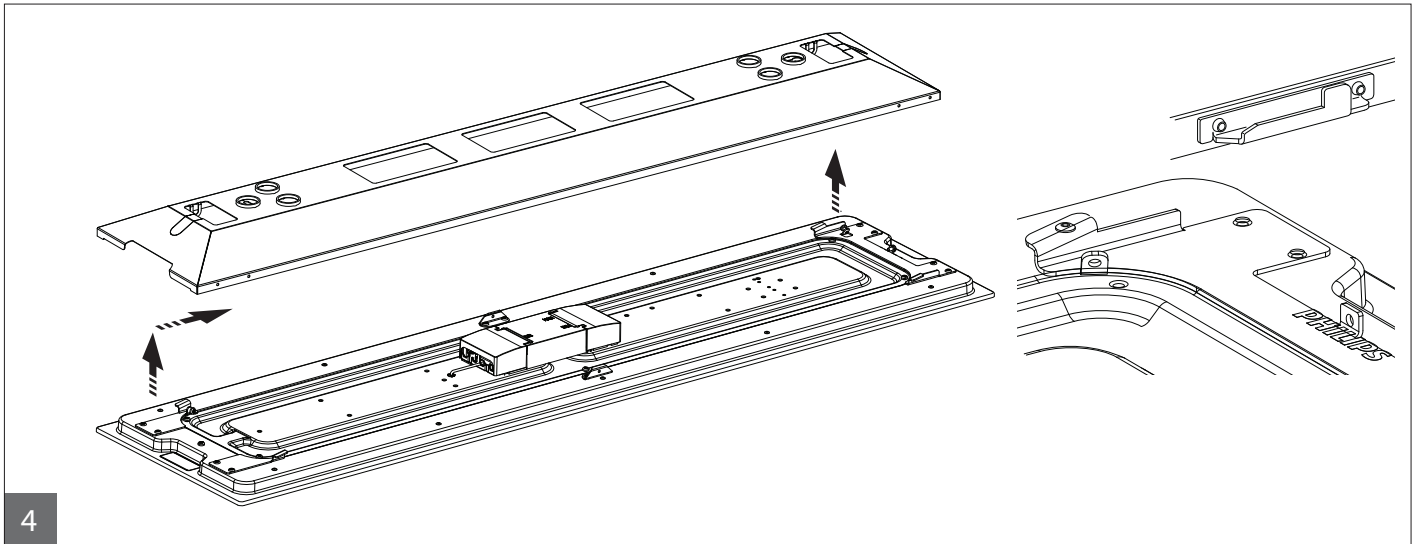


#### Suspension Kits.


Suspension set contents												
SM4	Square	•	•	•	•	4x	2x	4x			4x	
SMT	Rectan -	•	•	•	•	2x	•		4x	2x		
SMTT	gular			•	•		•		4x	2x		2x



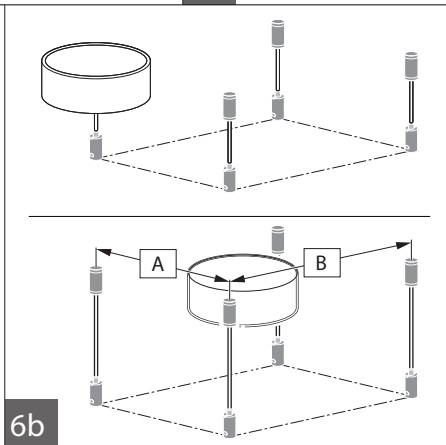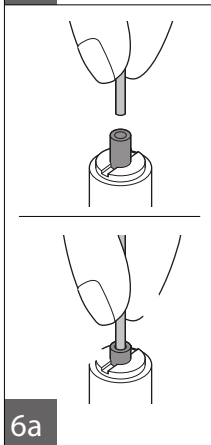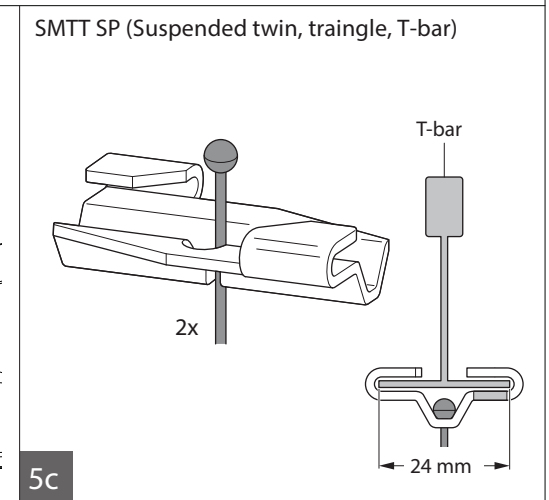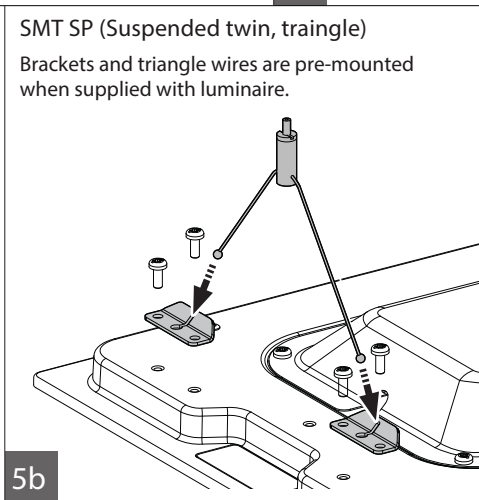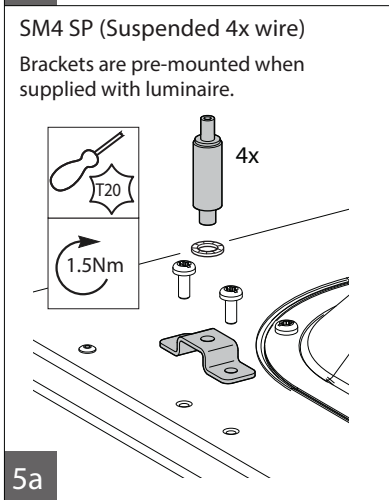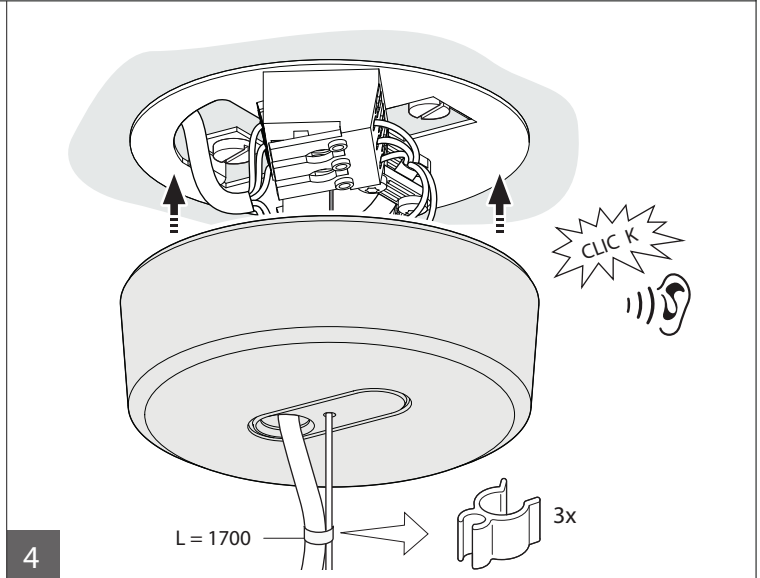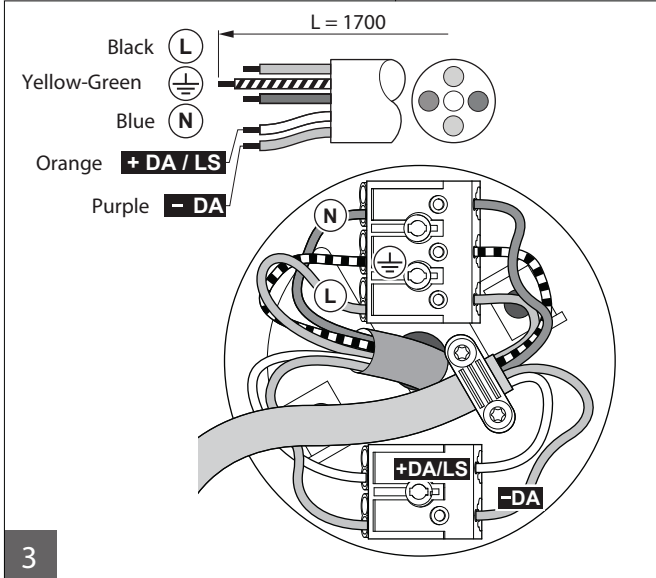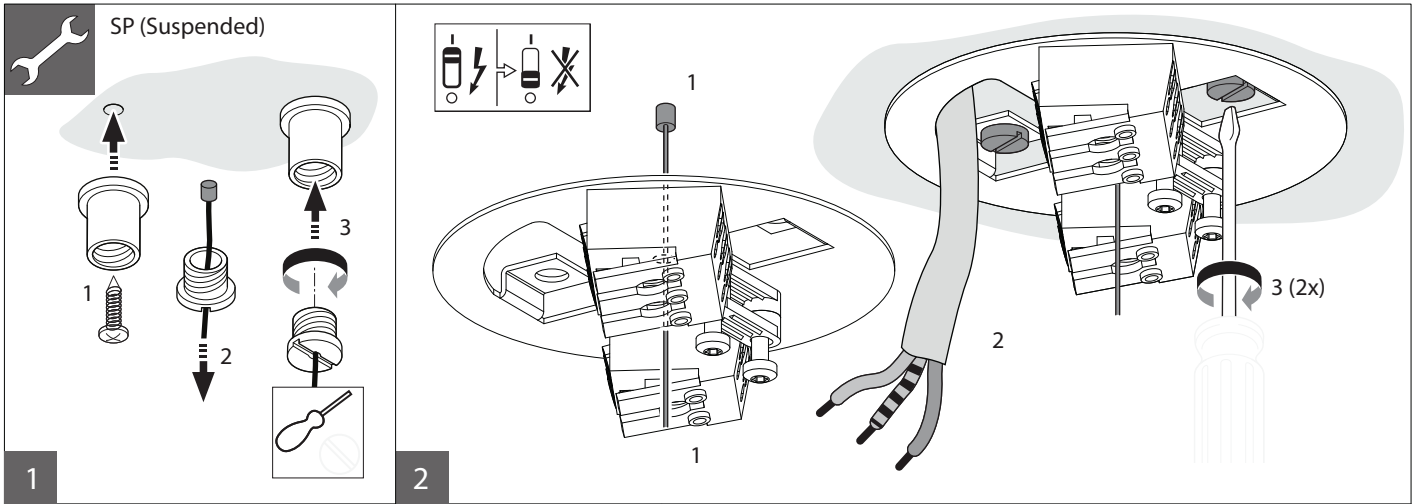


	A(mm)	B(mm)
W60L60	300	535
W60L60	300	560
W30L120	-	1115
W31L125	-	1165

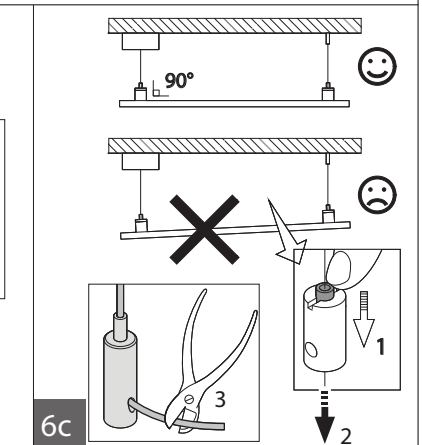


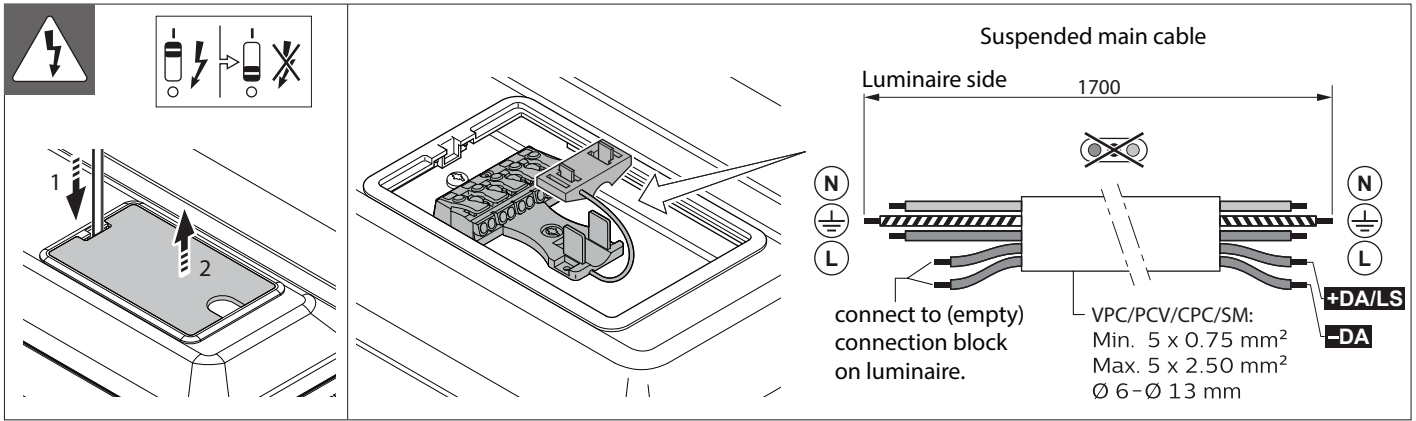


## Independent / standalone drivers

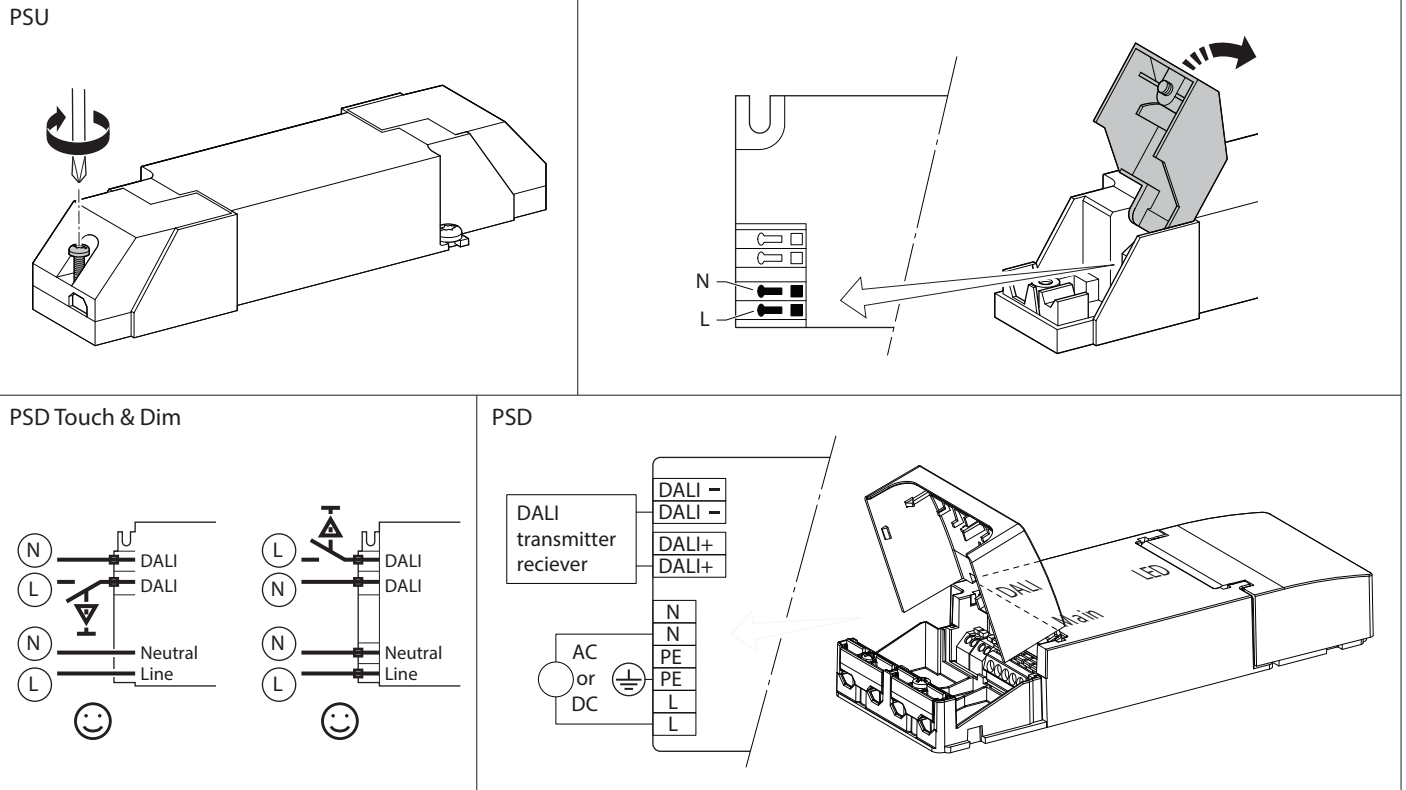


## Push-in (PIP)

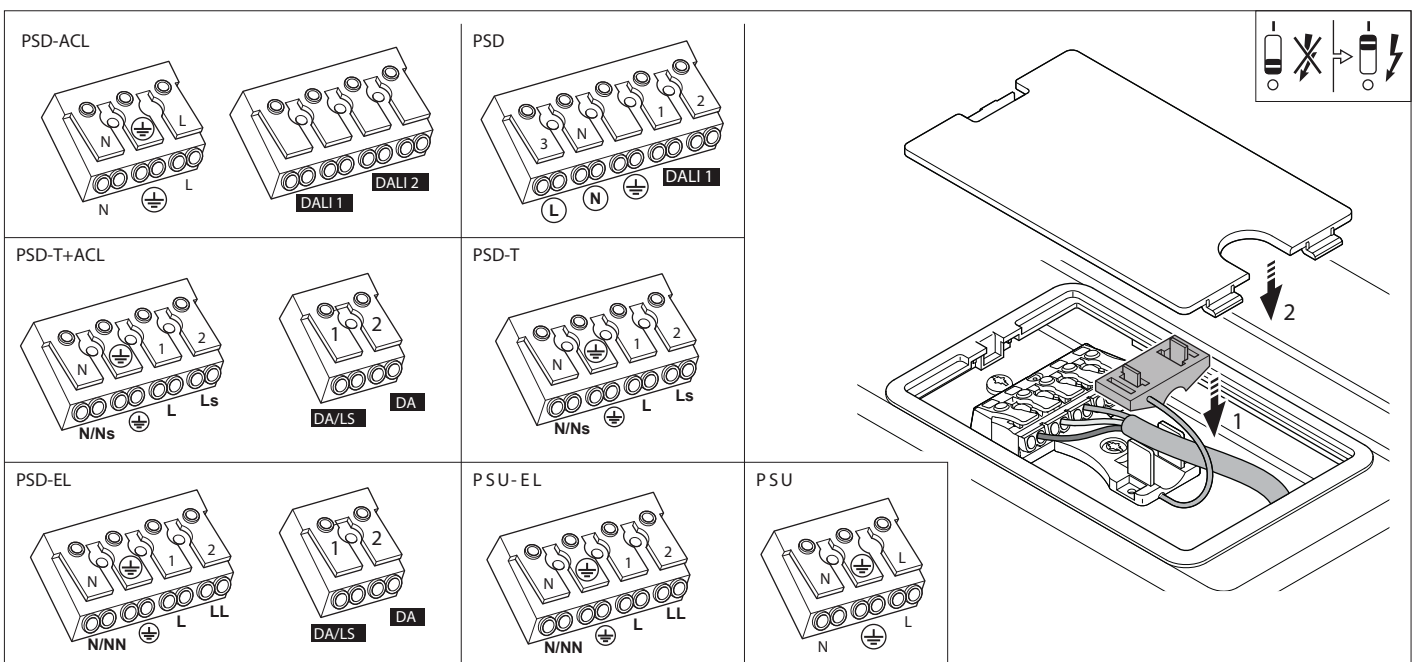


### Wieland (W) PSU (with back cover)

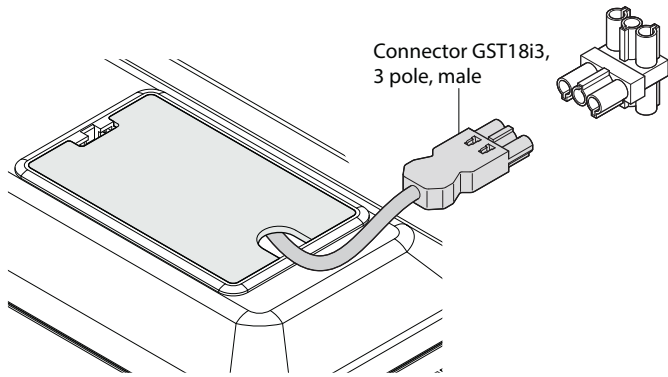



### Wieland (W) Actilume

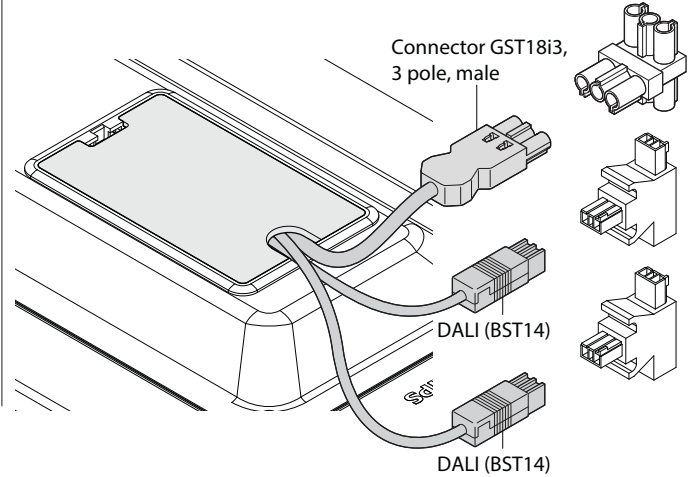

### Wieland (W) PSD Driver


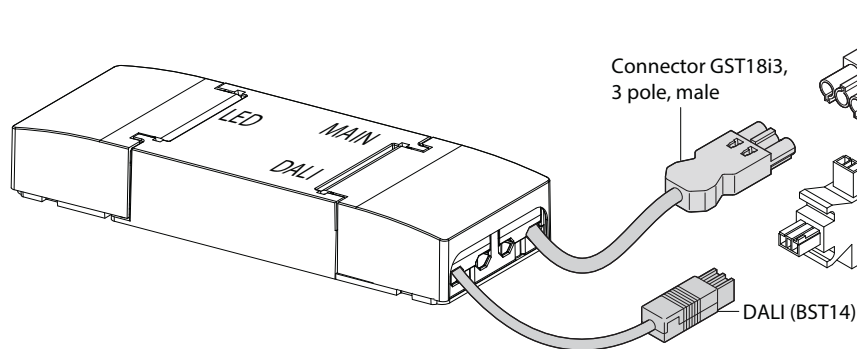


### Replacement driver

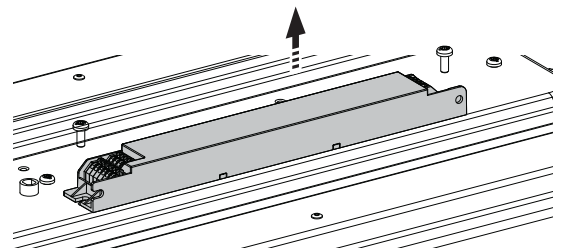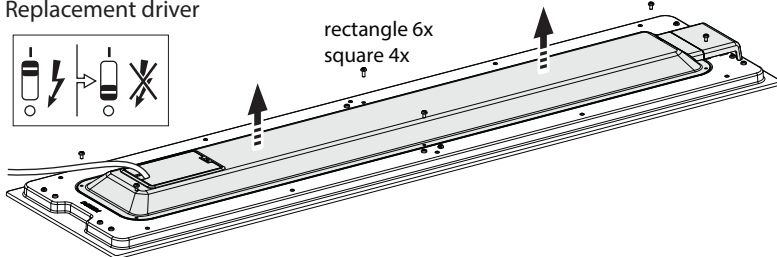

### PoE / PoE-EL

Condition Philips to specify to the customers (instruction):  
 > to use UTP (Unshielded Twisted Pair) CAT5E or CAT6 cable  
 > the maximum length of the cable to be 20 meters.  
 Apply a minimum radius of the Ethernet cable of 4x the cable diameter.

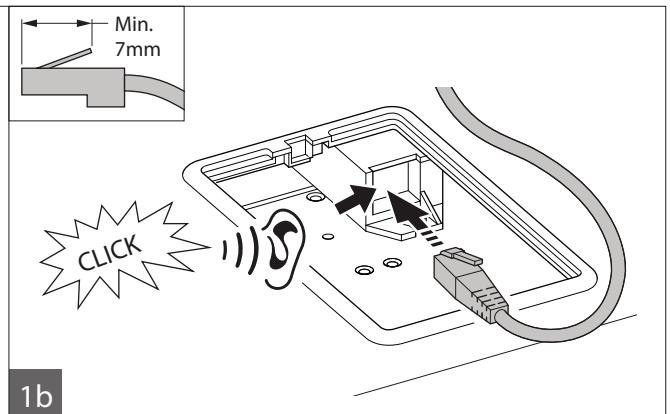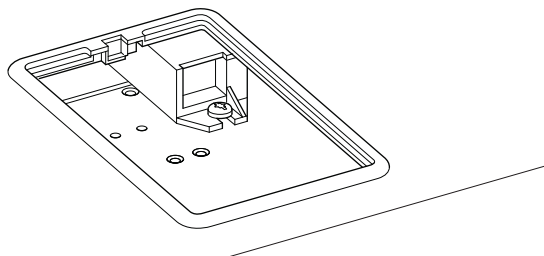

The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.

Please do not remove the protect film before installing to avoid scraping or dirtying the optical part.

Indoor use only.

During installation or maintaining the luminaire please use gloves to avoid spots on the cover.

To remove dirt and spots use the following: - Dust: use micro fiber cloths only

- Fingerprints, etc.: use a cleaner for synthetic materials with antistatic properties.



ATTENTION  
OBSERVE PRECAUTIONS  
FOR HANDLING  
ELECTROSTATIC  
SENSITIVE  
DEVICES