



New design means flexibility

Centium T5

Philips Advance Centium ballasts for T5 lamps at 120-277V are now available with our industry leading N-can at 9.5" x 1.3" x 1.0" or T-can at 14.17" x 1.18" x 1.06", which provides fixture manufacturers increased versatility in their newer generation fixture designs. These ballasts are compatible with all major energy-saving T5 linear lamps and have a variety of other features which makes them ideal for a variety of applications. The ballasts' programmed start ignition provides extended lamp life in frequent switching applications such as those where occupancy sensors are being used. They also feature lamp End-Of-Life (EOL) protection circuitry which safely removes power from the lamp at the end of lamp life.

Advantages

- Auto-restrike capability - Eliminates the need to reset power mains after failed lamps are replaced
- 0°F starting capability - Suitable for cold temperature applications

Functions

- IntelliVolt Technology (120-277V)
- Lamp EOL Protection
- UL Type CC rated - Anti-arcing circuitry provides greater flexibility to meet end-user application requirements

Application


- Retail, commercial, institutional and industrial applications including; schools, offices, specialty & department stores, warehouses and manufacturing

Centium T5

Versions



Schéma dimensionnel

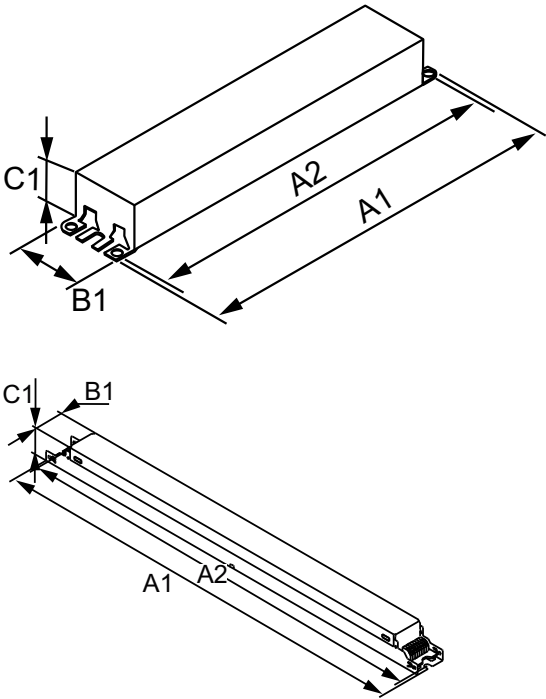

Product	A1	A2	B1	C1
CENTIUM GCN2S28L35M	16,70 in	16,34 in	1,18 in	1,00 in
CENTIUM ICN2S28N35M	9,50 in	8,90 in	1,30 in	1,00 in

Product	A1	A2	B1	C1
CENTIUM ICN3S14T35M	14,17 in	13,78 in	1,18 in	1,06 in
CENTIUM ICN2S28T35M	14,17 in	13,78 in	1,18 in	1,06 in

Fonctionnement et électricité	
Fréquence d'entrée	50 à 60 Hz
Distorsion harmonique totale États-Unis	10 %

Fonctionnement et électricité

Order Code	Full Product Name	Tension d'entrée
501650	CENTIUM ELE BALLAST (2) F28T5 120-277V	120 to 277 V
502591	CENTIUM ELE BALLAST (3) F14T5 120-277V	120 to 277 V

Order Code	Full Product Name	Tension d'entrée
500496	CENTIUM ELE BALLAST (2) F28T5 347V	347 V
198911	CENTIUM ELE BALLAST (2) F28T5 120-277V	120 to 277 V

Renseignements généraux

Centium T5

Order Code	Full Product Name	Nombre de lampes	Type de lampe
501650	CENTIUM ELE BALLAST (2) F28T5 120-277V	1/2 piece/unit	F28T5
502591	CENTIUM ELE BALLAST (3) F14T5 120-277V	2/3 piece/unit	F14T5

Order Code	Full Product Name	Nombre de lampes	Type de lampe
500496	CENTIUM ELE BALLAST (2) F28T5 347V	1/2 piece/unit	F28T5
198911	CENTIUM ELE BALLAST (2) F28T5 120-277V	1/2 piece/unit	F28T5

Mécanique et boîtier

Order Code	Full Product Name	Boîtier
501650	CENTIUM ELE BALLAST (2) F28T5 120-277V	T
502591	CENTIUM ELE BALLAST (3) F14T5 120-277V	T

Order Code	Full Product Name	Boîtier
500496	CENTIUM ELE BALLAST (2) F28T5 347V	L
198911	CENTIUM ELE BALLAST (2) F28T5 120-277V	N

