



The smart choice for maximum flexibility

SmartMate

Offering maximum versatility, the Philips Advance family of SmartMate ballasts for 4-pin compact fluorescent lamps drive a broad range of quad and triple-tube, circline, 2D, and long twin-tube lamps. SmartMate ballasts' energy efficient design, compact and lightweight housing, and user-friendly features make these ballasts an ideal choice for fixture manufacturers, retrofitters, and MRO replacement.

优点

- Reduces SKU requirements and inventory costs
- Enhances wiring accuracy and ease of assembly/installation
- Eliminates interference with infrared systems, anti-theft devices, or other electronic equipment


特点

- IntelliVolt (120-277V) input voltage range
- 1 or 2 Lamp operation
- Color-coded connectors
- Operates multiple lamp wattages



应用

- Restaurants, reception areas, conference and meeting rooms, hotel and convention center ballrooms, or when combined with CFL lamps, as an energy efficient replacement for incandescent down-lighting systems

Versions



二维绘图

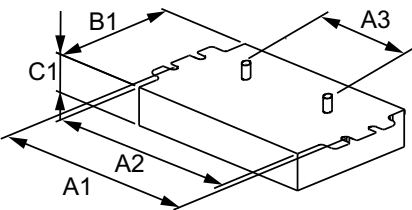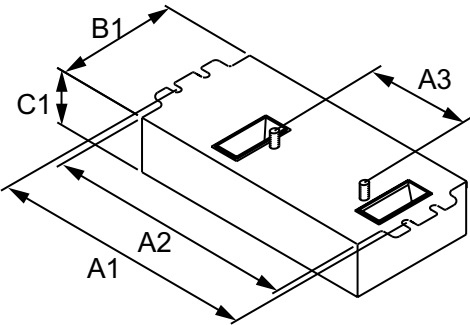

Studs for -BS models only
-LD models do not have
mounting studs

Product					
SMARTMATE ICF2S18H1LD35M					
SMARTMATE ICF2S26M1BSQS35M	4.60 in	4.20 in	2.00 in	2.40 in	0.98 in
SMARTMATE ICF2S26H1LD35M	4.60 in	4.20 in	2.00 in	2.40 in	0.98 in
SMARTMATE ICF2S13H1LD35M	4.60 in	4.20 in	2.00 in	2.40 in	0.98 in

Product	A1	A2	A3	B1	C1
SMARTMATE ICF2S42M2LD35M	4.55 in	4.20 in	2.00 in	3.00 in	1.29 in

运营和电气	
输入频率	50 至 60 岁 Hz
输入电压	120–277 V
美国总谐波变形	10 %
基本信息	
灯具数量	1/2 件/单位

基本信息

Order Code	Full Product Name	灯具类型
913700508491	SMARTMATE ELE BALLAST (2) 42W CFL (4-PIN) 120-277V	CFTR42W/GX24Q
913700508951	SMARTMATE ELE BALLAST (2) 18W CFL (4-PIN) 120-277V	-
913700508961	SMARTMATE ELE BALLAST (2) 26W CFL (4-PIN) 120-277V	CFQ26W/G24Q

Order Code	Full Product Name	灯具类型
913710207502	SMARTMATE ELE BALLAST (2) 13W CFL (4-PIN) 120-277V	CFQ13W/G24Q
913710817302	SMARTMATE ELE BALLAST (2) 26W CFL (4-PIN) 120-277V	CFQ26W/G24Q

机械和壳体

Order Code	Full Product Name	外壳
913700508491	SMARTMATE ELE BALLAST (2) 42W CFL (4-PIN) 120-277V	M2
913700508951	SMARTMATE ELE BALLAST (2) 18W CFL (4-PIN) 120-277V	H1
913700508961	SMARTMATE ELE BALLAST (2) 26W CFL (4-PIN) 120-277V	H1

Order Code	Full Product Name	外壳
913710207502	SMARTMATE ELE BALLAST (2) 13W CFL (4-PIN) 120-277V	H1
913710817302	SMARTMATE ELE BALLAST (2) 26W CFL (4-PIN) 120-277V	M1

