


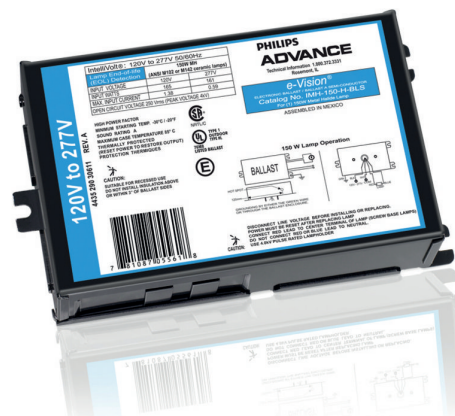

Compact designs, unlimited possibilities

e-Vision Low Wattage 20-150W

Low frequency electronic HID ballasts such as the Philips Advance e-Vision line constantly measure and adjust the wattage, optimizing delivery of the ceramic lamps' superior color properties. This makes ceramic metal halide operated by e-Vision ballasts the premier choice for many applications previously illuminated by either tungsten halogen or incandescent sources, such as retail lighting.

Advantages

- Constant lamp wattage for optimal color control and maximum performance
- Significant energy savings can be achieved when compared to incandescent or magnetic alternatives

Fonctions

- Low frequency lamp operation
- Intellivolt 120-277V input range
- Metallic enclosures for optimal thermal dissipation
- Smaller and lighter weight than magnetic HID ballasts
- Thermally protected, internally fused, and output short circuit protected with Lamp End-of-Life shutdown

Application

- Retail display and accent lighting in both track and downlights, lobbies, atriums, landscape and façade lighting

e-Vision Low Wattage 20-150W

Versions



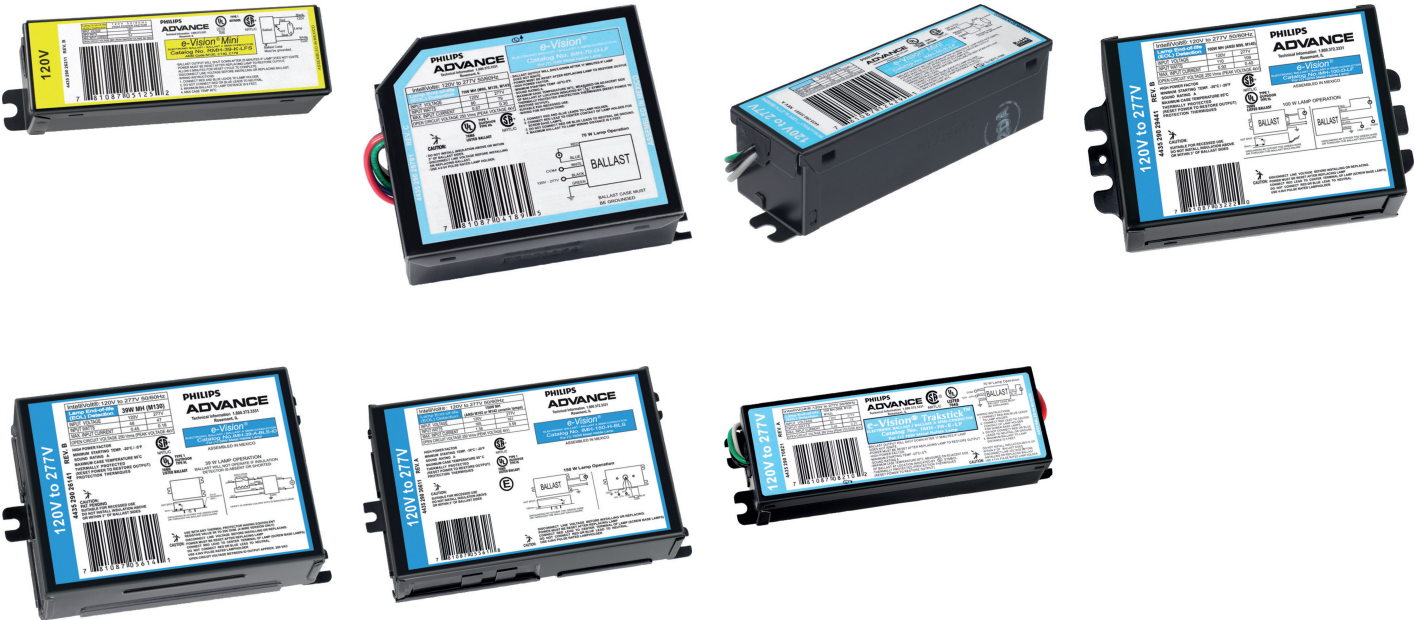


Schéma dimensionnel






Product	A1	A2	A3	A4	B1	B2	C1
E-VISION IMH70ELFM	5,5 in	5,0 in	5,3 in	2,0 in	1,7 in	1,0 in	1,2 in

Product	A1	A2	A3	A4	A5	B1	B2	C1
E-VISION IMHG20GBLSM	3,8 in	3,5 in	3,4 in	2,0 in	1,13 in	3,0 in	2,6 in	1,2 in
E-VISION IMHG20GLFM	3,8 in	3,5 in	3,4 in	2,0 in	1,13 in	3,0 in	2,6 in	1,2 in
E-VISION IMH70GLFM	3,8 in	3,5 in	3,4 in	2,0 in	1,13 in	3,0 in	2,6 in	1,2 in
E-VISION IMH70GBLSM	3,8 in	3,5 in	3,4 in	2,0 in	1,13 in	3,0 in	2,6 in	1,2 in
E-VISION ELE MH BAL 39W M130 120-277 50/60HZ	3,8 in	3,5 in	3,4 in	2,0 in	1,13 in	3,0 in	2,6 in	1,2 in
E-VISION IMH39GBLSM	3,8 in	3,5 in	3,4 in	2,0 in	1,13 in	3,0 in	2,6 in	1,2 in
E-VISION IMH50GBLSM	3,8 in	3,5 in	3,4 in	2,0 in	1,13 in	3,0 in	2,6 in	1,2 in

e-Vision Low Wattage 20-150W

Schéma dimensionnel



Product	A1	A2	A3	A4	B1	B2	C1
E-VISION IMH100BLFM	5,5 in	4,7 in	5,2 in	2,0 in	3,6 in	2,9 in	1,5 in
E-VISION IMH100ABLSIDM	5,5 in	4,7 in	5,2 in	2,0 in	3,6 in	2,9 in	1,5 in
E-VISION IMH39ABLSIDM	5,5 in	4,7 in	5,2 in	2,0 in	3,6 in	2,9 in	1,5 in
E-VISION IMH70ABLSIDM	5,5 in	4,7 in	5,2 in	2,0 in	3,6 in	2,9 in	1,5 in
E-VISION IMH150HBLSM	6,3 in	5,7 in	6,0 in	2,0 in	3,6 in	2,9 in	1,5 in
E-VISION IMH150HLFM	6,3 in	5,7 in	6,0 in	2,0 in	3,6 in	2,9 in	1,5 in
E-VISION IMH239ABLSM	5,5 in	4,7 in	5,2 in	2,0 in	3,6 in	2,9 in	1,5 in

Product	A1	A2	A3	A4	B1	B2	C1
E-VISION IMH100DBLSM	5,0 in	4,3 in	4,6 in	2,0 in	3,0 in	0,7 in	1,5 in
E-VISION IMH100DLFM	5,0 in	4,3 in	4,6 in	2,0 in	3,0 in	0,7 in	1,5 in
E-VISION IMH70DBLSM	5,0 in	4,3 in	4,6 in	2,0 in	3,0 in	0,7 in	1,5 in
E-VISION IMH70DLFM	5,0 in	4,3 in	4,6 in	2,0 in	3,0 in	0,7 in	1,5 in

Product	A1	A2	A3	B1	B2	C1
E-VISION IMH39KLFSM	4,4 in	4,1 in	4,5 in	1,1 in	0,5 in	1,2 in
E-VISION RMH20KBLSM	4,4 in	4,1 in	4,5 in	1,1 in	0,5 in	1,2 in
E-VISION RMH39KBLSM	4,4 in	4,1 in	4,5 in	1,1 in	0,5 in	1,2 in
E-VISION RMH20KLFSM	4,4 in	4,1 in	4,5 in	1,1 in	0,5 in	1,2 in
E-VISION RMH39KLFSM	4,4 in	4,1 in	4,5 in	1,1 in	0,5 in	1,2 in
E-VISION RMH39KLFSM	4,4 in	4,1 in	4,5 in	1,1 in	0,5 in	1,2 in

Fonctionnement et électricité

Fréquence d'entrée	50 à 60 Hz
Distorsion harmonique totale États-Unis	15 %

Fonctionnement et électricité

Order Code	Full Product Name	Tension d'entrée
120345	E-VISION ELE MH BAL 39W M130 / C179 120V	120 V
497941	E-VISION ELE MH BAL 39W M130 / C179 120V	120 V
121210	E-VISION ELE MH BAL 20W M175 120V	120 V
107367	E-VISION ELE MH BAL 39W M130/C179 120V 50/60HZ	120 V
501361	E-VISION ELE MH BAL 20W M175 120V	120 V
513820	E-VISION ELE MH BAL 50W C193 120-277V 50/60HZ	120 to 277 V
120971	E-VISION ELE MH BAL 39W M130 120-277 50/60HZ	120 to 277 V

Order Code	Full Product Name	Tension d'entrée
120989	E-VISION ELE MH BAL 39W M130 120-277 50/60HZ	120 to 277 V
121053	E-VISION ELE MH BAL 70W M139/M143 120-277 50/60HZ	120 to 277 V
121046	E-VISION ELE MH BAL 70W M139/M143 120-277 50/60HZ	120 to 277 V
107813	E-VISION ELE MH BAL 20W M156 120-277V 50/60HZ	120 to 277 V
107235	E-VISION ELE MH BAL 20W M156 120-277V 50/60HZ	120 to 277 V

e-Vision Low Wattage 20-150W

Order Code	Full Product Name	Tension d'entrée
498691	E-VISION ELE MH BAL 39W C130 120-277V 50/60HZ	120 to 277 V
119503	E-VISION ELE MH BAL 70W M139/M143 120-277 50/60HZ	120 to 277 V
119701	E-VISION ELE MH BAL 70W M139/M143 120-277 50/60HZ	120 to 277 V
119495	E-VISION ELE MH BAL 100W M140 120-277V 50/60HZ	120 to 277 V
119719	E-VISION ELE MH BAL 100W M140 120-277V 50/60HZ	120 to 277 V
121145	E-VISION ELE MH BAL 2X39W M130 120-277V 50/60HZ	120 to 277 V
195354	E-VISION ELE MH BAL 70W M139/143 120-277V ID OUT	120 to 277 V

Order Code	Full Product Name	Tension d'entrée
107375	E-VISION ELE MH BAL 39W M130 120-277V ID OUT	120 to 277 V
195362	E-VISION ELE MH BAL 100W M140 120-277V ID OUT	120 to 277 V
198838	E-VISION ELE MH BAL 100W M140 120-277 50/60HZ	120 to 277 V
121251	E-VISION ELE MH BAL 150W M102/142 120-277V 50/60H	120 to 277 V
121269	E-VISION ELE MH BAL 150W M102/142 120-277V 50/60H	120 to 277 V
199935	E-VISION ELE MH BAL 70W M98/139/143 120-277V	120 to 277 V

Renseignements généraux

Order Code	Full Product Name	Nombre de lampes	Type de lampe
120345	E-VISION ELE MH BAL 39W M130 / C179 120V	1 piece/unit	39W MH
497941	E-VISION ELE MH BAL 39W M130 / C179 120V	1 piece/unit	39W MH
121210	E-VISION ELE MH BAL 20W M175 120V	1 piece/unit	22W Philips Mini MC
107367	E-VISION ELE MH BAL 39W M130/C179 120V 50/60HZ	1 piece/unit	39W MH
501361	E-VISION ELE MH BAL 20W M175 120V	1 piece/unit	22W Philips Mini MC
513820	E-VISION ELE MH BAL 50W C193 120-277V 50/60HZ	1 piece/unit	50W MH
120971	E-VISION ELE MH BAL 39W M130 120-277 50/60HZ	1 piece/unit	39W MH
120989	E-VISION ELE MH BAL 39W M130 120-277 50/60HZ	1 piece/unit	39W MH
121053	E-VISION ELE MH BAL 70W M139/M143 120-277 50/60HZ	1 piece/unit	70W MH
121046	E-VISION ELE MH BAL 70W M139/M143 120-277 50/60HZ	1 piece/unit	70W MH
107813	E-VISION ELE MH BAL 20W M156 120-277V 50/60HZ	1 piece/unit	20W MH
107235	E-VISION ELE MH BAL 20W M156 120-277V 50/60HZ	1 piece/unit	20W MH
498691	E-VISION ELE MH BAL 39W C130 120-277V 50/60HZ	1 piece/unit	39W MH

Order Code	Full Product Name	Nombre de lampes	Type de lampe
119503	E-VISION ELE MH BAL 70W M139/M143 120-277 50/60HZ	1 piece/unit	70W MH
119701	E-VISION ELE MH BAL 70W M139/M143 120-277 50/60HZ	1 piece/unit	70W MH
119495	E-VISION ELE MH BAL 100W M140 120-277V 50/60HZ	1 piece/unit	100W MH
119719	E-VISION ELE MH BAL 100W M140 120-277V 50/60HZ	1 piece/unit	100W MH
121145	E-VISION ELE MH BAL 2X39W M130 120-277V 50/60HZ	2 piece/unit	39W MH
195354	E-VISION ELE MH BAL 70W M139/143 120-277V ID OUT	1 piece/unit	70W MH
107375	E-VISION ELE MH BAL 39W M130 120-277V ID OUT	1 piece/unit	39W MH
195362	E-VISION ELE MH BAL 100W M140 120-277V ID OUT	1 piece/unit	100W MH
198838	E-VISION ELE MH BAL 100W M140 120-277 50/60HZ	1 piece/unit	100W MH
121251	E-VISION ELE MH BAL 150W M102/142 120-277V 50/60H	1 piece/unit	150W MH
121269	E-VISION ELE MH BAL 150W M102/142 120-277V 50/60H	1 piece/unit	150W MH
199935	E-VISION ELE MH BAL 70W M98/139/143 120-277V	1 piece/unit	70W MH

Mécanique et boîtier

Order Code	Full Product Name	Boîtier
120345	E-VISION ELE MH BAL 39W M130 / C179 120V	K
497941	E-VISION ELE MH BAL 39W M130 / C179 120V	K
121210	E-VISION ELE MH BAL 20W M175 120V	K
107367	E-VISION ELE MH BAL 39W M130/C179 120V 50/60HZ	K
501361	E-VISION ELE MH BAL 20W M175 120V	K
513820	E-VISION ELE MH BAL 50W C193 120-277V 50/60HZ	G
120971	E-VISION ELE MH BAL 39W M130 120-277 50/60HZ	G

Order Code	Full Product Name	Boîtier
120989	E-VISION ELE MH BAL 39W M130 120-277 50/60HZ	G
121053	E-VISION ELE MH BAL 70W M139/M143 120-277 50/60HZ	G
121046	E-VISION ELE MH BAL 70W M139/M143 120-277 50/60HZ	G
107813	E-VISION ELE MH BAL 20W M156 120-277V 50/60HZ	G
107235	E-VISION ELE MH BAL 20W M156 120-277V 50/60HZ	G
498691	E-VISION ELE MH BAL 39W C130 120-277V 50/60HZ	K
119503	E-VISION ELE MH BAL 70W M139/M143 120-277 50/60HZ	D

e-Vision Low Wattage 20-150W

Order Code	Full Product Name	Boîtier
119701	E-VISION ELE MH BAL 70W M139/M143 120-277 50/60HZ	D
119495	E-VISION ELE MH BAL 100W M140 120-277V 50/60HZ	D
119719	E-VISION ELE MH BAL 100W M140 120-277V 50/60HZ	D
121145	E-VISION ELE MH BAL 2X39W M130 120-277V 50/60HZ	A-B
195354	E-VISION ELE MH BAL 70W M139/143 120-277V ID OUT	A-B
107375	E-VISION ELE MH BAL 39W M130 120-277V ID OUT	A-B

Order Code	Full Product Name	Boîtier
195362	E-VISION ELE MH BAL 100W M140 120-277V ID OUT	A-B
198838	E-VISION ELE MH BAL 100W M140 120-277 50/60HZ	A-B
121251	E-VISION ELE MH BAL 150W M102/142 120-277V 50/60H	H
121269	E-VISION ELE MH BAL 150W M102/142 120-277V 50/60H	H
199935	E-VISION ELE MH BAL 70W M98/139/143 120-277V	E

