



# Appropriate choice for many fluorescent lamp types on the market

## Standard

Available for many fluorescent lamp types sold today, including Preheat, Rapid Start, 2-pin CFL, Slimline, High Output, Very High Output and Circline. Magnetic ballasts can be used in any application where these lamps are used.

## Benefits

- 60 HZ lamp operation eliminates possible EMI/RFI interference

## Features


- Only choice for many low volume lamp types on the market

## Application

- General office, warehouses, gymnasiums, manufacturing facilities, parking garages

Standard

Versions



LC1420CTPI



REL2P59SRHTP35I



RLCS140TPWI



H1B9TPWM



H1Q26TPWM



VH1B9TPWM



LO1322TPM





VH2B13TPBLSM



RC2S102TPI

## Dimensional drawing


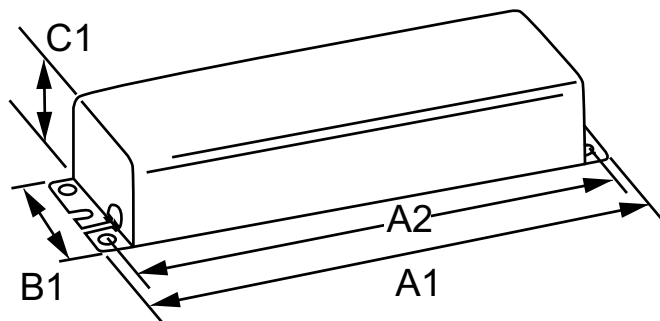
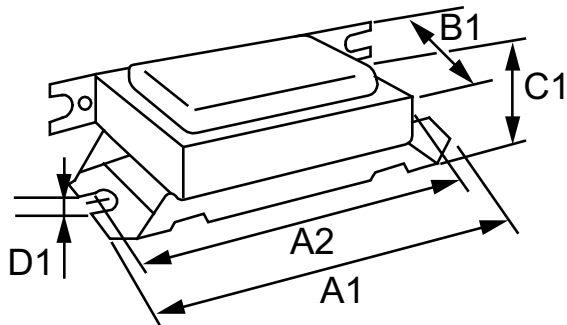


| Product                                          | A1      | A2      | B1      | C1      | D1      |
|--------------------------------------------------|---------|---------|---------|---------|---------|
| STANDARD MAG BALLAST (1) F20T12 PH 120V          | 3.06 in | 2.75 in | 1.81 in | 1.59 in | 0.19 in |
| STANDARD MAG BALLAST (1) F25T12 PH 120V          | 3.06 in | 2.75 in | 1.81 in | 1.59 in | 0.19 in |
| STANDARD MAG BALLAST (1) F20T12 PH 120V          | 3.06 in | 2.75 in | 1.81 in | 1.59 in | 0.19 in |
| STANDARD MAG BALLAST (1) F8T5 PH 120V            | 3.06 in | 2.75 in | 1.81 in | 1.59 in | 0.19 in |
| STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 120V | 3.06 in | 2.75 in | 1.81 in | 1.59 in | 0.19 in |
| STANDARD MAG BALLAST (1) F20T12 PH 120V          | 3.06 in | 2.75 in | 1.81 in | 1.59 in | 0.19 in |
| STANDARD MAG BALLAST (1) F20T12 PH 120V          | 3.06 in | 2.75 in | 1.81 in | 1.59 in | 0.19 in |
| STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 120V | 3.06 in | 2.75 in | 1.81 in | 1.59 in | 0.19 in |
| STANDARD MAG BALLAST (1) F8T5 PH 120V            | 3.06 in | 2.75 in | 1.81 in | 1.59 in | 0.19 in |

| Product                                          | A1       | A2       | B1      | C1      |
|--------------------------------------------------|----------|----------|---------|---------|
| STANDARD MAG BALLAST (2) 26W COMPACT(2-PIN) 277V | 9.5 in   | 8.91 in  | 2.38 in | 1.69 in |
| STANDARD MAG BALLAST (2) F48T12/VHO 277V         | 14.31 in | 13.75 in | 3.19 in | 2.63 in |
| STANDARD MAG BALLAST (2) F96T12/VHO 277V         | 14.31 in | 13.75 in | 3.19 in | 2.63 in |
| STANDARD MAG BALLAST (1) 26W COMPACT(2-PIN) 277V | 4.75 in  | 4.38 in  | 2.22 in | 1.63 in |
| STANDARD MAG BALLAST (2) F96T12/VHO 120V         | 14.31 in | 13.75 in | 3.19 in | 2.63 in |
| STANDARD MAG BALLAST (2) F96T12/VHO 120V         | 14.31 in | 13.75 in | 3.19 in | 2.63 in |
| STANDARD MAG BALLAST (2) F48T12/VHO 120V         | 14.31 in | 13.75 in | 3.19 in | 2.63 in |
| STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 120V | 4.25 in  | 3.56 in  | 2 in    | 1.44 in |
| STANDARD MAG BALLAST (2) 26W COMPACT(2-PIN) 120V | 9.5 in   | 8.91 in  | 2.38 in | 1.69 in |
| STANDARD MAG BALLAST (2) 13W COMPACT(2-PIN) 277V | 4.75 in  | 4.38 in  | 2.22 in | 1.63 in |
| STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 277V | 4.75 in  | 4.38 in  | 2.22 in | 1.63 in |
| STANDARD MAG BALLAST (1) 9W COMPACT(2-PIN) 277V  | 4.75 in  | 4.38 in  | 2.22 in | 1.63 in |
| STANDARD MAG BALLAST (1) F20T12 PH 120V          | 6.5 in   | 6 in     | 1.94 in | 1.38 in |
| STANDARD MAG BALLAST (1) 9W COMPACT(2-PIN) 120V  | 4.25 in  | 3.56 in  | 2 in    | 1.44 in |
| STANDARD MAG BALLAST (1) FC8T9 CIRCLINE 120V     | 6.5 in   | 6 in     | 1.94 in | 1.38 in |

Dimensional drawing

| Product                                          | A1     | A2   | B1      | C1      |
|--------------------------------------------------|--------|------|---------|---------|
| STANDARD MAG BALLAST (1) F20T12 PH 120V          | 6.5 in | 6 in | 1.94 in | 1.38 in |
| STANDARD MAG BALLAST (1) FC16T9<br>CIRCLINE 120V | 6.5 in | 6 in | 1.94 in | 1.38 in |

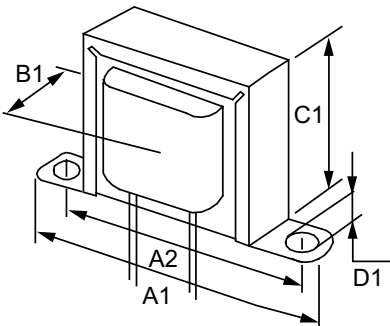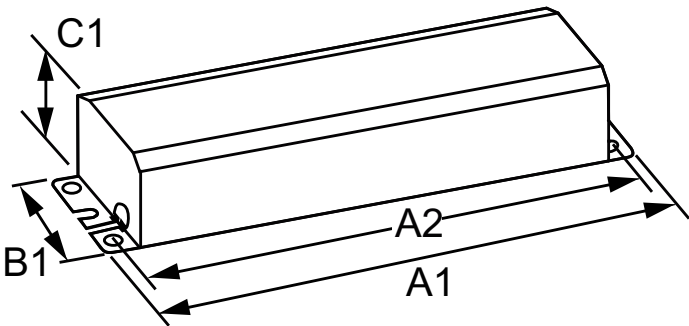

| Product                                             | A1      | A2      | B1      | C1      |
|-----------------------------------------------------|---------|---------|---------|---------|
| STANDARD MAG BALLAST (1) F20T12 PH 120V             | 3.06 in | 2.75 in | 1.44 in | 1.81 in |
| STANDARD MAG BALLAST (2) 13W<br>COMPACT(2-PIN) 277V | 4 in    | 3.5 in  | 1.81 in | 2.25 in |
| STANDARD MAG BALLAST (1) 13W<br>COMPACT(2-PIN) 277V | 3.75 in | 2.19 in | 1.75 in | 2 in    |
| STANDARD MAG BALLAST (1) 28W<br>COMPACT(2-PIN) 120V | 3.06 in | 2.75 in | 1.5 in  | 1.81 in |
| STANDARD MAG BALLAST (1) F20T12 PH 120V             | 3.06 in | 2.75 in | 1.44 in | 1.81 in |

| Product                                              | A1     | A2      | B1      | C1     |
|------------------------------------------------------|--------|---------|---------|--------|
| STANDARD MAG BALLAST (1) FC12T9 & (1) FC16T9<br>120V | 6.5 in | 6 in    | 2.38 in | 1.5 in |
| STANDARD MAG BALLAST (1) F20T12 PH 120V              | 9.5 in | 8.91 in | 2.38 in | 1.5 in |
| STANDARD MAG BALLAST (2) 13W COMPACT(2-<br>PIN) 120V | 6.5 in | 6 in    | 2.38 in | 1.5 in |
| STANDARD MAG BALLAST (1) 26W COMPACT(2-<br>PIN) 120V | 6.5 in | 6 in    | 2.38 in | 1.5 in |
| STANDARD MAG BALLAST (2) F20T12 PH 120V              | 9.5 in | 8.91 in | 2.38 in | 1.5 in |
| STANDARD MAG BALLAST (2) F20T12 PH 120V              | 9.5 in | 8.91 in | 2.38 in | 1.5 in |
| STANDARD MAG BALLAST (1) 26W COMPACT(2-<br>PIN) 120V | 6.5 in | 6 in    | 2.38 in | 1.5 in |
| STANDARD MAG BALLAST (1) FC8T9 & (1) FC12T9<br>120V  | 6.5 in | 6 in    | 2.38 in | 1.5 in |
| STANDARD MAG BALLAST (2) F20T12 PH 120V              | 6.5 in | 6 in    | 2.38 in | 1.5 in |

| Product                               | A1      | A2   | B1      | C1      | D1      |
|---------------------------------------|---------|------|---------|---------|---------|
| STANDARD MAG BALLAST (1) F8T5 PH 120V | 2.38 in | 2 in | 1.59 in | 1.38 in | 0.19 in |
| STANDARD MAG BALLAST (1) F8T5 PH 120V | 2.38 in | 2 in | 1.59 in | 1.38 in | 0.19 in |
| STANDARD MAG BALLAST (1) F8T5 PH 120V | 2.38 in | 2 in | 1.59 in | 1.38 in | 0.19 in |
| STANDARD MAG BALLAST (1) F8T5 PH 120V | 2.38 in | 2 in | 1.59 in | 1.38 in | 0.19 in |

| Operating and Electrical |       |
|--------------------------|-------|
| Input Frequency          | 60 Hz |

Operating and Electrical

## Standard

| Order Code  | Full Product Name                                    | Input Voltage | Total Harmonic |     |
|-------------|------------------------------------------------------|---------------|----------------|-----|
|             |                                                      |               | Distortion     | USA |
| LC1420CTPI  | STANDARD MAG BALLAST (1)<br>F20T12 PH 120V           | 120 V         | 10 %           |     |
| LC49CI      | STANDARD MAG BALLAST (1) F8T5<br>PH 120V             | 120 V         | 10 %           |     |
| LC13TPM     | STANDARD MAG BALLAST (1) 13W<br>COMPACT(2-PIN) 120V  | 120 V         | 15 %           |     |
| LC1420CTPM  | STANDARD MAG BALLAST (1)<br>F20T12 PH 120V           | 120 V         | 10 %           |     |
| LC1420CM    | STANDARD MAG BALLAST (1)<br>F20T12 PH 120V           | 120 V         | 10 %           |     |
| LC13TPI     | STANDARD MAG BALLAST (1) 13W<br>COMPACT(2-PIN) 120V  | 120 V         | 15 %           |     |
| LC49CTPM    | STANDARD MAG BALLAST (1) F8T5<br>PH 120V             | 120 V         | 15 %           |     |
| LC1420CI    | STANDARD MAG BALLAST (1)<br>F20T12 PH 120V           | 120 V         | 10 %           |     |
| LC25TPI     | STANDARD MAG BALLAST (1)<br>F25T12 PH 120V           | 120 V         | 10 %           |     |
| RL2SP20TPI  | STANDARD MAG BALLAST (2)<br>F20T12 PH 120V           | 120 V         | 10 %           |     |
| RLQ120TPI   | STANDARD MAG BALLAST (1)<br>F20T12 PH 120V           | 120 V         | 10 %           |     |
| RLQ120TPM   | STANDARD MAG BALLAST (1)<br>F20T12 PH 120V           | 120 V         | 10 %           |     |
| HM2SP20TPM  | STANDARD MAG BALLAST (2)<br>F20T12 PH 120V           | 120 V         | 10 %           |     |
| HM2SP20TPI  | STANDARD MAG BALLAST (2)<br>F20T12 PH 120V           | 120 V         | 10 %           |     |
| HM1P20TPI   | STANDARD MAG BALLAST (1)<br>F20T12 PH 120V           | 120 V         | 10 %           |     |
| RLCS140TPWI | STANDARD MAG BALLAST (1)<br>FC16T9 CIRCLINE 120V     | 120 V         | 10 %           |     |
| RLQS122TPWI | STANDARD MAG BALLAST (1) FC8T9<br>CIRCLINE 120V      | 120 V         | 10 %           |     |
| RS2232TPWI  | STANDARD MAG BALLAST (1) FC8T9<br>& (1) FC12T9 120V  | 120 V         | 15 %           |     |
| RS3240TPWI  | STANDARD MAG BALLAST (1)<br>FC12T9 & (1) FC16T9 120V | 120 V         | 20 %           |     |
| H1B9TPWM    | STANDARD MAG BALLAST (1) 9W<br>COMPACT(2-PIN) 120V   | 120 V         | 20 %           |     |
| H1B13TPWI   | STANDARD MAG BALLAST (1) 13W<br>COMPACT(2-PIN) 120V  | 120 V         | 25 %           |     |
| H1Q26TPWI   | STANDARD MAG BALLAST (1) 26W<br>COMPACT(2-PIN) 120V  | 120 V         | 25 %           |     |

| Order Code   | Full Product Name                                   | Input Voltage | Total Harmonic |     |
|--------------|-----------------------------------------------------|---------------|----------------|-----|
|              |                                                     |               | Distortion     | USA |
| H1Q26TPBLSM  | STANDARD MAG BALLAST (1) 26W<br>COMPACT(2-PIN) 120V | 120 V         | 25 %           |     |
| H2Q26TPBLSM  | STANDARD MAG BALLAST (2) 26W<br>COMPACT(2-PIN) 120V | 120 V         | 15 %           |     |
| VH1B9TPWM    | STANDARD MAG BALLAST (1) 9W<br>COMPACT(2-PIN) 277V  | 277 V         | 35 %           |     |
| VH1B13TPWI   | STANDARD MAG BALLAST (1) 13W<br>COMPACT(2-PIN) 277V | 277 V         | 30 %           |     |
| VH1Q26TPWM   | STANDARD MAG BALLAST (1) 26W<br>COMPACT(2-PIN) 277V | 277 V         | 20 %           |     |
| LO1322TPM    | STANDARD MAG BALLAST (1)<br>F20T12 PH 120V          | 120 V         | 15 %           |     |
| LOS1Q28M     | STANDARD MAG BALLAST (1) 28W<br>COMPACT(2-PIN) 120V | 120 V         | 15 %           |     |
| LPL59M       | STANDARD MAG BALLAST (1) F8T5<br>PH 120V            | 120 V         | 10 %           |     |
| LPL59TPM     | STANDARD MAG BALLAST (1) F8T5<br>PH 120V            | 120 V         | 15 %           |     |
| LPL79M       | STANDARD MAG BALLAST (1) F8T5<br>PH 120V            | 120 V         | 10 %           |     |
| VLO13TPI     | STANDARD MAG BALLAST (1) 13W<br>COMPACT(2-PIN) 277V | 277 V         | 10 %           |     |
| VLO2S13TPI   | STANDARD MAG BALLAST (2) 13W<br>COMPACT(2-PIN) 277V | 277 V         | 15 %           |     |
| LO1322M      | STANDARD MAG BALLAST (1)<br>F20T12 PH 120V          | 120 V         | 10 %           |     |
| LPL59TPI     | STANDARD MAG BALLAST (1) F8T5<br>PH 120V            | 120 V         | 15 %           |     |
| VH2B13TPBLSM | STANDARD MAG BALLAST (2) 13W<br>COMPACT(2-PIN) 277V | 277 V         | 35 %           |     |
| H2B13TPBLSM  | STANDARD MAG BALLAST (2) 13W<br>COMPACT(2-PIN) 120V | 120 V         | 30 %           |     |
| VH2Q26TPBLSM | STANDARD MAG BALLAST (2) 26W<br>COMPACT(2-PIN) 277V | 277 V         | 25 %           |     |
| RC2S102TPI   | STANDARD MAG BALLAST (2)<br>F48T12/VHO 120V         | 120 V         | 30 %           |     |
| RC2S200TPI   | STANDARD MAG BALLAST (2)<br>F96T12/VHO 120V         | 120 V         | 20 %           |     |
| RS2S200TPI   | STANDARD MAG BALLAST (2)<br>F96T12/VHO 120V         | 120 V         | 15 %           |     |
| VS2S200TPI   | STANDARD MAG BALLAST (2)<br>F96T12/VHO 277V         | 277 V         | 20 %           |     |
| VC2S102TPI   | STANDARD MAG BALLAST (2)<br>F48T12/VHO 277V         | 277 V         | 35 %           |     |

### General Information

| Order Code | Full Product Name                          | Number Of    |           |
|------------|--------------------------------------------|--------------|-----------|
|            |                                            | Lamps        | Lamp Type |
| LC1420CTPI | STANDARD MAG BALLAST (1)<br>F20T12 PH 120V | 1 piece/unit | F20T12    |

| Order Code | Full Product Name                        | Number Of    |           |
|------------|------------------------------------------|--------------|-----------|
|            |                                          | Lamps        | Lamp Type |
| LC49CI     | STANDARD MAG BALLAST (1) F8T5<br>PH 120V | 1 piece/unit | F8T5      |

## Standard

| Order Code  | Full Product Name                                 | Number Of Lamps | Lamp Type       |
|-------------|---------------------------------------------------|-----------------|-----------------|
| LC13TPM     | STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 120V  | 1 piece/unit    | CFQ13W/GX23     |
| LC1420CTPM  | STANDARD MAG BALLAST (1) F20T12 PH 120V           | 1 piece/unit    | F20T12          |
| LC1420CM    | STANDARD MAG BALLAST (1) F20T12 PH 120V           | 1 piece/unit    | F20T12          |
| LC13TPI     | STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 120V  | 1 piece/unit    | CFQ13W/GX23     |
| LC49CTPM    | STANDARD MAG BALLAST (1) F8T5 PH 120V             | 1 piece/unit    | CFQ9W/G23       |
| LC1420CI    | STANDARD MAG BALLAST (1) F20T12 PH 120V           | 1 piece/unit    | F20T12          |
| LC25TPI     | STANDARD MAG BALLAST (1) F25T12 PH 120V           | 1 piece/unit    | F25T12          |
| RL2SP20TPI  | STANDARD MAG BALLAST (2) F20T12 PH 120V           | 2 piece/unit    | F20T12          |
| RLQ120TPI   | STANDARD MAG BALLAST (1) F20T12 PH 120V           | 1 piece/unit    | F20T12          |
| RLQ120TPM   | STANDARD MAG BALLAST (1) F20T12 PH 120V           | 1 piece/unit    | F20T12          |
| HM2SP20TPM  | STANDARD MAG BALLAST (2) F20T12 PH 120V           | 2 piece/unit    | F20T12          |
| HM2SP20TPI  | STANDARD MAG BALLAST (2) F20T12 PH 120V           | 2 piece/unit    | F20T12          |
| HM1P20TPI   | STANDARD MAG BALLAST (1) F20T12 PH 120V           | 1 piece/unit    | F20T12          |
| RLCS140TPWI | STANDARD MAG BALLAST (1) FC16T9 CIRCLINE 120V     | 1 piece/unit    | FC16T9          |
| RLQS122TPWI | STANDARD MAG BALLAST (1) FC8T9 CIRCLINE 120V      | 1 piece/unit    | FC8T9           |
| RS2232TPWI  | STANDARD MAG BALLAST (1) FC8T9 & (1) FC12T9 120V  | 2 piece/unit    | FC8T9 & FC12T9  |
| RS3240TPWI  | STANDARD MAG BALLAST (1) FC12T9 & (1) FC16T9 120V | 2 piece/unit    | FC12T9 & FC16T9 |
| H1B9TPWM    | STANDARD MAG BALLAST (1) 9W COMPACT(2-PIN) 120V   | 1 piece/unit    | CFQ9W/G23       |
| H1B13TPWI   | STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 120V  | 1 piece/unit    | CFQ13W/GX23     |
| H1Q26TPWI   | STANDARD MAG BALLAST (1) 26W COMPACT(2-PIN) 120V  | 1 piece/unit    | CFQ26W/G24D     |
| H1Q26TPBLSM | STANDARD MAG BALLAST (1) 26W COMPACT(2-PIN) 120V  | 1 piece/unit    | CFQ26W/G24D     |

| Order Code   | Full Product Name                                | Number Of Lamps | Lamp Type    |
|--------------|--------------------------------------------------|-----------------|--------------|
| H2Q26TPBLSM  | STANDARD MAG BALLAST (2) 26W COMPACT(2-PIN) 120V | 2 piece/unit    | CFQ26W/G24D  |
| VH1B9TPWM    | STANDARD MAG BALLAST (1) 9W COMPACT(2-PIN) 277V  | 1 piece/unit    | CFQ9W/G23    |
| VH1B13TPWI   | STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 277V | 1 piece/unit    | CFQ13W/GX23  |
| VH1Q26TPWM   | STANDARD MAG BALLAST (1) 26W COMPACT(2-PIN) 277V | 1 piece/unit    | CFQ26W/G24D  |
| LO1322TPM    | STANDARD MAG BALLAST (1) F20T12 PH 120V          | 1 piece/unit    | F20T12       |
| LO1Q28M      | STANDARD MAG BALLAST (1) 28W COMPACT(2-PIN) 120V | 1 piece/unit    | CFQ27W/GX32D |
| LPL59M       | STANDARD MAG BALLAST (1) F8T5 PH 120V            | 1 piece/unit    | F8T5         |
| LPL59TPM     | STANDARD MAG BALLAST (1) F8T5 PH 120V            | 1 piece/unit    | CFQ9W/G23    |
| LPL79M       | STANDARD MAG BALLAST (1) F8T5 PH 120V            | 1 piece/unit    | F8T5         |
| VLO13TPI     | STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 277V | 1 piece/unit    | CFQ13W/GX23  |
| VLO2S13TPI   | STANDARD MAG BALLAST (2) 13W COMPACT(2-PIN) 277V | 2 piece/unit    | CFQ13W/GX23  |
| LO1322M      | STANDARD MAG BALLAST (1) F20T12 PH 120V          | 1 piece/unit    | F20T12       |
| LPL59TPI     | STANDARD MAG BALLAST (1) F8T5 PH 120V            | 1 piece/unit    | CFQ9W/G23    |
| VH2B13TPBLSM | STANDARD MAG BALLAST (2) 13W COMPACT(2-PIN) 277V | 2 piece/unit    | CFQ13W/GX23  |
| H2B13TPBLSM  | STANDARD MAG BALLAST (2) 13W COMPACT(2-PIN) 120V | 2 piece/unit    | CFQ13W/GX23  |
| VH2Q26TPBLSM | STANDARD MAG BALLAST (2) 26W COMPACT(2-PIN) 277V | 2 piece/unit    | CFQ26W/G24D  |
| RC2S102TPI   | STANDARD MAG BALLAST (2) F48T12/VHO 120V         | 1/2 piece/unit  | F96T12/VHO   |
| RC2S200TPI   | STANDARD MAG BALLAST (2) F96T12/VHO 120V         | 1/2 piece/unit  | F96T12/VHO   |
| RS2S200TPI   | STANDARD MAG BALLAST (2) F96T12/VHO 120V         | 1/2 piece/unit  | F96T12/VHO   |
| VS2S200TPI   | STANDARD MAG BALLAST (2) F96T12/VHO 277V         | 1/2 piece/unit  | F96T12/VHO   |
| VC2S102TPI   | STANDARD MAG BALLAST (2) F48T12/VHO 277V         | 1/2 piece/unit  | F96T12/VHO   |

### Mechanical and Housing

| Order Code | Full Product Name                                | Housing |
|------------|--------------------------------------------------|---------|
| LC1420CTPI | STANDARD MAG BALLAST (1) F20T12 PH 120V          | C2      |
| LC49CI     | STANDARD MAG BALLAST (1) F8T5 PH 120V            | C2      |
| LC13TPM    | STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 120V | C2      |
| LC1420CTPM | STANDARD MAG BALLAST (1) F20T12 PH 120V          | C2      |
| LC1420CM   | STANDARD MAG BALLAST (1) F20T12 PH 120V          | C2      |

| Order Code | Full Product Name                                | Housing |
|------------|--------------------------------------------------|---------|
| LC13TPI    | STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 120V | C2      |
| LC49CTPM   | STANDARD MAG BALLAST (1) F8T5 PH 120V            | C2      |
| LC1420CI   | STANDARD MAG BALLAST (1) F20T12 PH 120V          | C2      |
| LC25TPI    | STANDARD MAG BALLAST (1) F25T12 PH 120V          | C2      |
| RL2SP20TPI | STANDARD MAG BALLAST (2) F20T12 PH 120V          | T1      |

## Standard

| Order Code  | Full Product Name                                 | Housing |
|-------------|---------------------------------------------------|---------|
| RLQ120TPI   | STANDARD MAG BALLAST (1) F20T12 PH 120V           | R4      |
| RLQ120TPM   | STANDARD MAG BALLAST (1) F20T12 PH 120V           | R4      |
| HM2SP20TPM  | STANDARD MAG BALLAST (2) F20T12 PH 120V           | T2      |
| HM2SP20TPI  | STANDARD MAG BALLAST (2) F20T12 PH 120V           | T2      |
| HM1P20TPI   | STANDARD MAG BALLAST (1) F20T12 PH 120V           | T2      |
| RLCS140TPWI | STANDARD MAG BALLAST (1) FC16T9 CIRCLINE 120V     | R4      |
| RLQS122TPWI | STANDARD MAG BALLAST (1) FC8T9 CIRCLINE 120V      | R4      |
| RS2232TPWI  | STANDARD MAG BALLAST (1) FC8T9 & (1) FC12T9 120V  | T1      |
| RS3240TPWI  | STANDARD MAG BALLAST (1) FC12T9 & (1) FC16T9 120V | T1      |
| H1B9TPWM    | STANDARD MAG BALLAST (1) 9W COMPACT(2-PIN) 120V   | R1      |
| H1B13TPWI   | STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 120V  | R1      |
| H1Q26TPWI   | STANDARD MAG BALLAST (1) 26W COMPACT(2-PIN) 120V  | T1      |
| H1Q26TPBLSM | STANDARD MAG BALLAST (1) 26W COMPACT(2-PIN) 120V  | T1      |
| H2Q26TPBLSM | STANDARD MAG BALLAST (2) 26W COMPACT(2-PIN) 120V  | R5      |
| VH1B9TPWM   | STANDARD MAG BALLAST (1) 9W COMPACT(2-PIN) 277V   | R2      |
| VH1B13TPWI  | STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 277V  | R2      |
| VH1Q26TPWM  | STANDARD MAG BALLAST (1) 26W COMPACT(2-PIN) 277V  | R2      |

| Order Code   | Full Product Name                                | Housing |
|--------------|--------------------------------------------------|---------|
| LO1322TPM    | STANDARD MAG BALLAST (1) F20T12 PH 120V          | X3      |
| LO51Q28M     | STANDARD MAG BALLAST (1) 28W COMPACT(2-PIN) 120V | X6      |
| LPL59M       | STANDARD MAG BALLAST (1) F8T5 PH 120V            | X1      |
| LPL59TPM     | STANDARD MAG BALLAST (1) F8T5 PH 120V            | X1      |
| LPL79M       | STANDARD MAG BALLAST (1) F8T5 PH 120V            | X2      |
| VLO13TPI     | STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 277V | X5      |
| VLO2S13TPI   | STANDARD MAG BALLAST (2) 13W COMPACT(2-PIN) 277V | X8      |
| LO1322M      | STANDARD MAG BALLAST (1) F20T12 PH 120V          | X3      |
| LPL59TPI     | STANDARD MAG BALLAST (1) F8T5 PH 120V            | X1      |
| VH2B13TPBLSM | STANDARD MAG BALLAST (2) 13W COMPACT(2-PIN) 277V | R2      |
| H2B13TPBLSM  | STANDARD MAG BALLAST (2) 13W COMPACT(2-PIN) 120V | T1      |
| VH2Q26TPBLSM | STANDARD MAG BALLAST (2) 26W COMPACT(2-PIN) 277V | R5      |
| RC2S102TPI   | STANDARD MAG BALLAST (2) F48T12/VHO 120V         | R11     |
| RC2S200TPI   | STANDARD MAG BALLAST (2) F96T12/VHO 120V         | R11     |
| RS2S200TPI   | STANDARD MAG BALLAST (2) F96T12/VHO 120V         | R11     |
| VS2S200TPI   | STANDARD MAG BALLAST (2) F96T12/VHO 277V         | R11     |
| VC2S102TPI   | STANDARD MAG BALLAST (2) F48T12/VHO 277V         | R11     |

