




Al reflector series 铝反射器系列


	Type Description 型号描述			Windage Area 迎风面积	IP
Gear part 电器箱部分	H/MDK900/400	HPL-N 400W HPI 400W BUS	8.00	0.15m ²	Optical 光源腔 IP65 Luminaire 整灯 IP43
	MDK900/250	HPL-N 250W HPI 250W BUS	7.00		
	SDK900/150	SON150W	6.00		
	SDK900/250	SON250W	7.00		
	SDK900/400	SON400W	8.00		
Reflector 反射器部分	ZDK007 NB				
	ZDK005 NB Glass				
	ZDK009 WB				
	ZDK004 WB Glass				

Prismatic reflector series 塑料棱镜反射器系列


	Type Description 型号描述			Windage Area 迎风面积	IP
Gear part 电器箱部分	MDK900LEXA/400	HPI 400W BUS	12.7	0.256m ²	Optical 光源腔 IP65 Luminaire 整灯 IP20
	MDK900LEXA/250	HPI 250W BUS	11.8		
	SDK900LEXA/150	SON150W	10.6		
	SDK900LEXA/250	SON250W	11.8		
	SDK900LEXA/400	SON400W	12.7		
Reflector 反射器部分	Lexalite reflector				
	GPK518 PC-C IP20 Ø645mm				
	Clamp accessory				

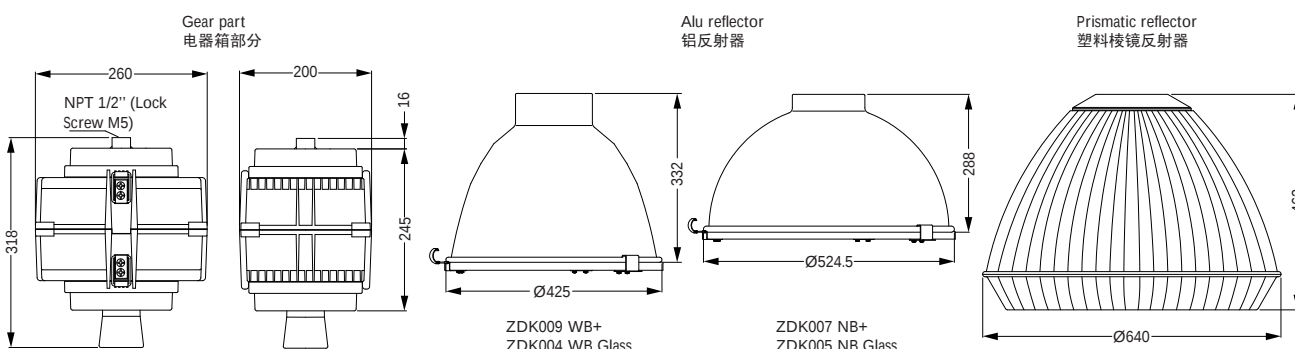


1 Unlock mounting cup 开启安装盘

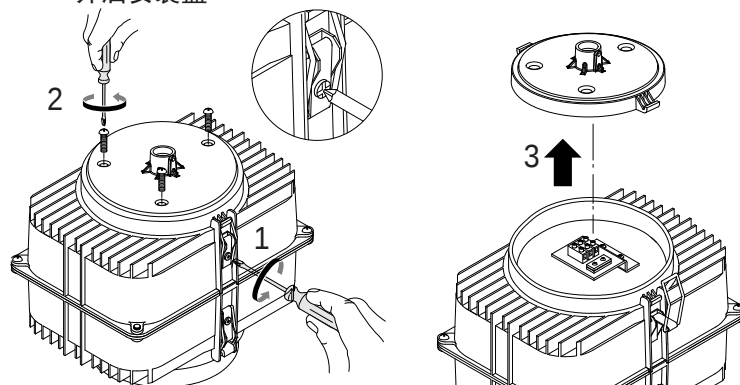


2 Install tube or hook into mounting cup, tightened up and adjust it 将管子或吊钩拧入安装盘，旋紧并调整一定安装角度

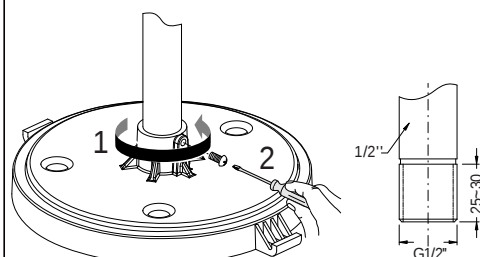


3 Install the reflector 安装反射器

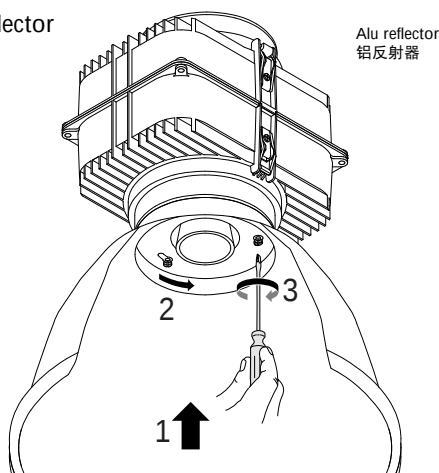


Prismatic reflector 塑料棱镜反射器

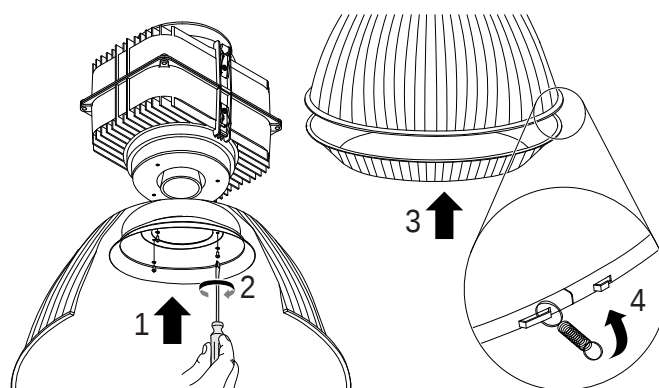


4 Electrical connection 接通线路

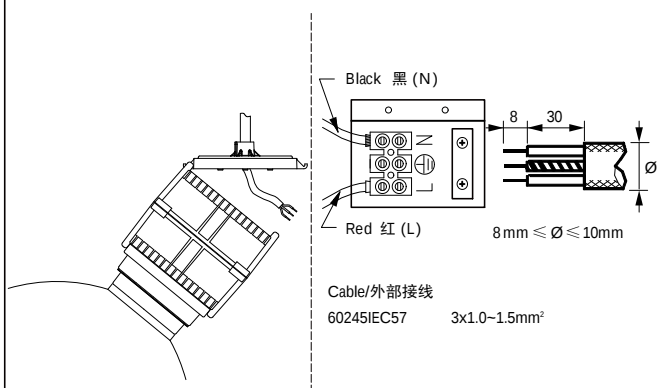


5

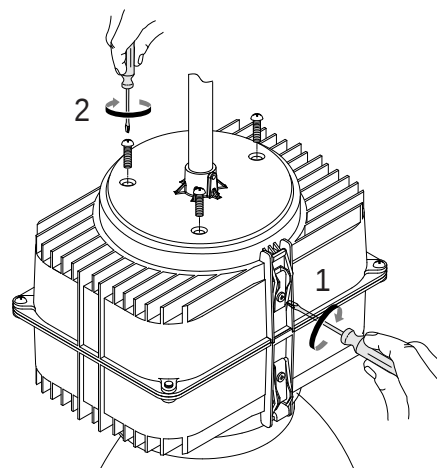

6 Replace the lamp 更换光源

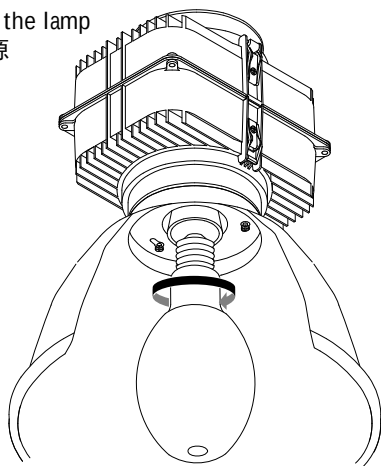

7 Install the protective glass 安装防护玻璃

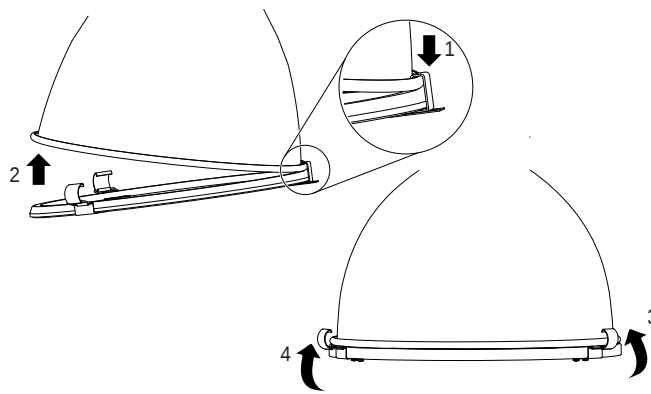

- In order to ensure optimum performance, please clean the luminaire regularly (recommended twice a year). While cleaning the luminaire, please use a soft cotton pad only.
为了保持灯具明亮效果, 请定期 (半年一次) 进行清洁。灯具清洁时请使用软布擦拭。
- Please turn off the power and take down the protective glass before maintenance and lamp replacement.
须断开电源后, 才能维修和更换光源。更换光源时须将玻璃组件完全取下。
- The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.
灯具应由有资格的电工安装, 接线要符合 IEE 电气标准或国家标准。
- Please replace any cracked safety screen.
钢化玻璃保护屏碎裂时请立即更换。
- This luminaire is only suitable for indoor usage. And not suitable for the corrosive environment and area prone to hurricane and extreme winds.
本灯具仅限于室内使用, 且不适合安装在会产生酸性碱性腐蚀的环境及海边、港口等强台风多发地区。
- The luminaire suit for IEC60598.
灯具符合国标 GB7000.10-1999, GB7000.1-2007; GB17743-1999, GB17625.1-2003。
- The gear box must be used with corresponding reflector/glass sets. Philips will not be responsible for all consequences if misused.
本产品之电器箱必须与对应的反射器/玻璃组件配套使用, 飞利浦不承担因搭配使用不当而产生的一切后果及责任。

